


KADECO®



ROMAN BLIND TENSIONED

TECHNOLOGY




Description	Type	Operation	Page
	Straight windows		
Tensioned	FRT06	Handle	4
	Ceilings	FRT13	Crank
			16
	Straight windows	FRT07	Handle
Tensioned			10
Accessories			20
	For all Roman blind types		

Straight windows

Ceilings

Accessories

FRT06

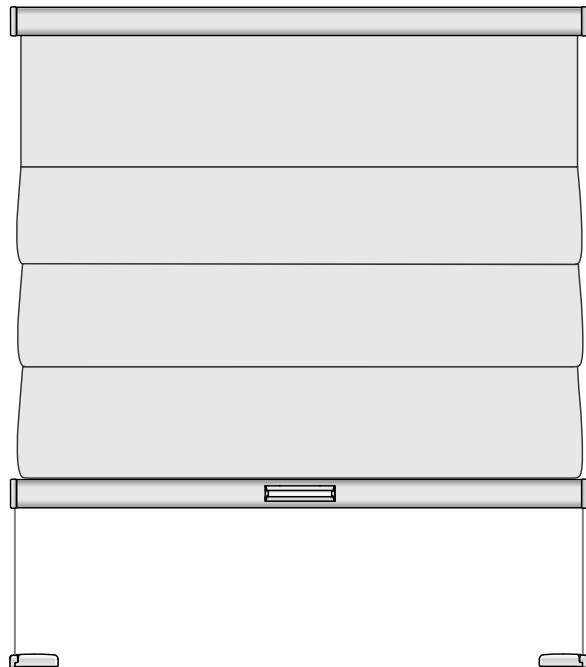

Description

- Tensioned system for vertical installation with fixed top rail made of aluminium (22 x 16.9 mm)
- Movable bottom rail made of aluminium (22 x 16.2 mm)
- Stacking on one side at the top on the fixed rail
- Operated by a handle on the operating rail
- The handle is colour-coordinated with the rail
- Velcro and loop tape are used to attach the fabric to the top and bottom rail.

Profile colours	Profiles	Dimensions	
White		Max. width x height 150 x 150 cm 120 x 220 cm	
Anodised silver			
Anthracite			
Black brown			
		Min. width x height 12 x 20 cm	
Plastic colours			
White			
Grey			
Anthracite			
Black			

F - mounted in rebate

STANDARD



Installation in the glazing/window rebate

- Top rail fastened by screwed clips
- Fastened at the bottom by screwed clamping shoes

Special features

- The rail profile grips via the clamping shoe and stops flush with the rebate




Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Not suitable for

- Window bar depth < 19 mm

Installation accessories




Fastening clip



Clamping shoe


Accessories for an additional charge




Clamping shoe for magnetic catch on bottom rail

See table "Additional charges"

Note about measurements

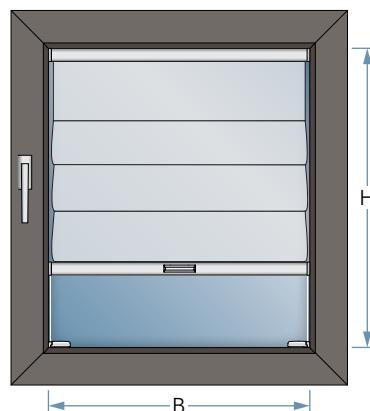


To establish any dimensional tolerances, measure the width (B) at several points. If these differ, specify the smallest width.



sloping rebate

Order width = B
Order height = H




straight rebate

Order width = B less 5 mm
Order height = H


W - wall bracket



Installation accessories




Wall bracket



Wall bracket with clamping shoe

Accessories for an additional charge



Wall bracket with clamping shoe for magnetic catch on bottom rail

See table "Additional charges"

OPTIONAL

Installation on the frame

- Top rail fastened by screwed wall brackets with clips
- Fastened at the bottom by screwed wall brackets with clamping shoes


Special features

- The rail profile grips at the bottom via the clamping shoe and stops flush with the wall bracket

Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows

Note about measurements

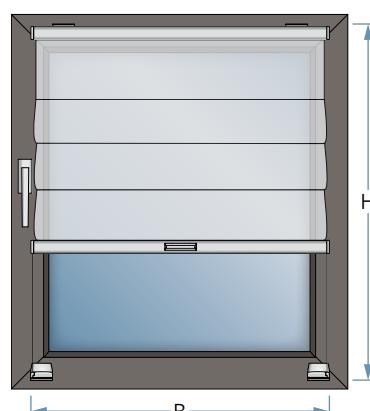

When measuring, watch out for protruding fittings.

Order width:


B incl. desired excess

Order height:

H incl. desired excess*

* Excess at the top and bottom min. 25 mm each
(= height of the wall bracket)

FRT07

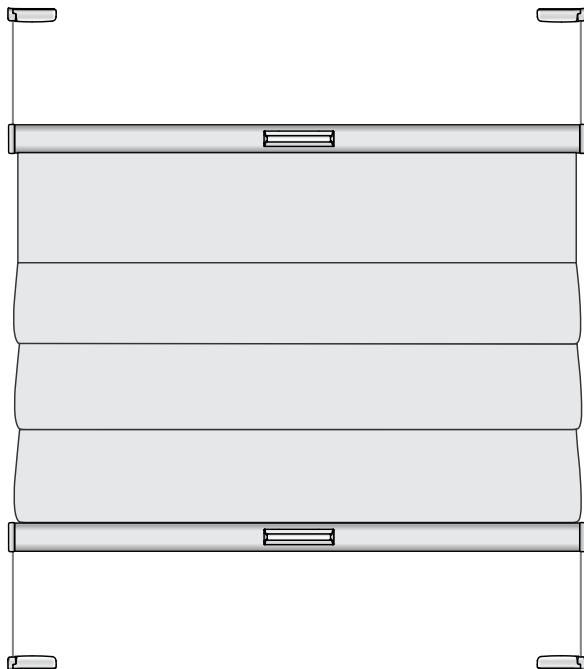


Description

- Tensioned system for vertical installation with freely movable top and bottom rails made of aluminium (both 22 x 16.2 mm)
- Horizontal synchronisation of both operating rails
- Variable stacking at top or bottom
- Operated by plastic handles on the operating rails
- The handles are colour-coordinated with the rail
- Velcro and loop tape are used to attach the fabric to the top and bottom rail.

Profile colours	Profiles	Dimensions	
White		Max. width x height 150 x 150 cm 120 x 220 cm	
Anodised silver			
Anthracite			
Black brown			
		Min. width x height 23 x 20 cm	
Plastic colours			
White			
Grey			
Anthracite			
Black			

F - mounted in rebate

STANDARD

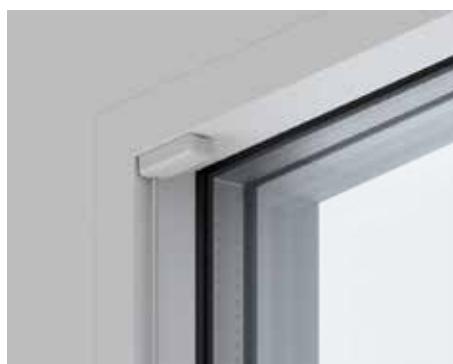

Installation in the glazing/window rebate

- Fastened at the top and bottom by screwed clamping shoes
- Top rail locked to clamping shoes with magnetic catch (optional magnetic catch on the top rail)



Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Special features

- The rail profile grips via the clamping shoe and stops flush with the rebate

Not suitable for


- Window bar depth < 19 mm

Installation accessories




Clamping shoe at top and bottom

Accessories for an additional charge




Clamping shoe with magnetic catch at top

Note about measurements

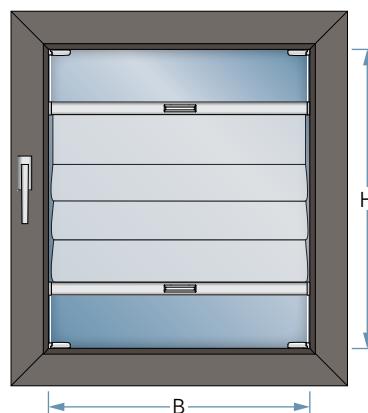


To establish any dimensional tolerances, measure the width (B) at several points. If these differ, specify the smallest width.



sloping rebate

Order width = B
Order height = H



straight rebate


Order width = B less 5 mm
Order height = H

W - wall bracket

OPTIONAL




Installation accessories



Wall bracket with clamping shoe at top and bottom

Accessories for an additional charge



Wall bracket with clamping shoe and magnetic catch at top

Installation on the frame

- Fastened at the top and bottom by screwed wall brackets with clamping shoes
- Top rail locked to clamping shoes by magnetic catch (optional magnetic catch on the top rail)


Special features

- The rail profile grips at the bottom via the clamping shoe and stops flush with the wall bracket

Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows

Note about measurements

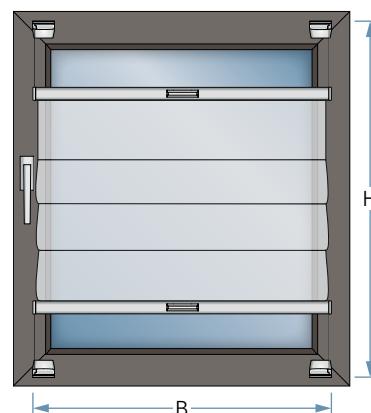

When measuring, watch out for protruding fittings.

Order width:

B incl. desired excess

Order height:

H incl. desired excess*

* Excess at the top and bottom min. 25 mm each
(= height of the wall bracket)

L - window bar bracket



Additional charge €20.00 per system

Installation on the frame

- Fastened at the top and bottom by screwed window bar brackets with clamping shoes
- Top rail locked to clamping shoes by magnetic catch (optional magnetic catch on the top rail)



Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Special features

- More intricate than wall bracket
- The rail profile grips via the clamping shoe and stops flush with the window bar bracket

Not suitable for


- Window bar thickness < 10 mm

Installation accessories





Window bar bracket at top and bottom

Accessories for an additional charge



Window bar bracket with magnetic catch at top

Note about measurements

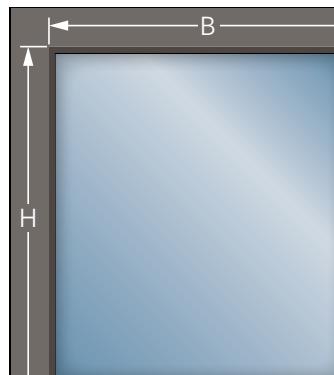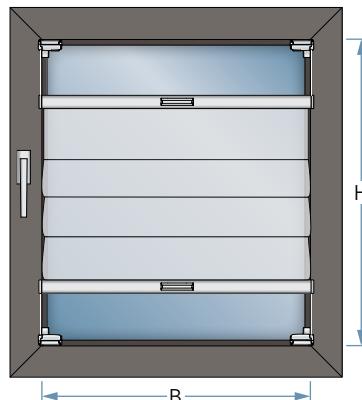

Measure the width and height of the window bar.

When measuring, watch out for protruding fittings.

Order width = B plus 5 mm
Order height = H less 8 mm

BT - bracket mount



Additional charge €15.60 per system

Installation on the casement

- Very simple installation without screws at the top and bottom using two bracket mounts each with integrated clamping shoe

Special features

- Bracket mount can be removed without a trace




Suitable for

- Plastic windows
- Aluminium windows

Not suitable for


- Casement depth > 25 mm

Installation accessories



Bracket mount (white, grey or black)


Accessories for an additional charge



Spacer plates required for rebate depth < 15 mm


See table "Additional charges"

Note about measurements

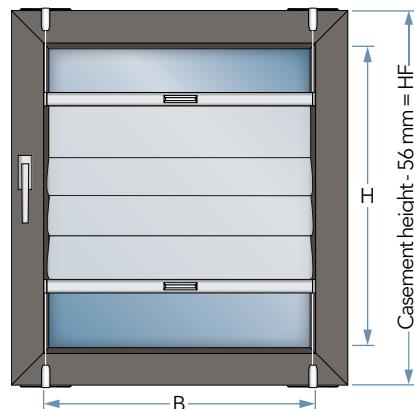


Specify dimension HF in addition to order height H.

Check whether the bracket mount can be used with respect to the window mechanism and distance to the windowsill. Casement thickness 7 mm to max. 25 mm. If using a spacer plate, min. 4.5 mm to max 22.5 mm.



sloping rebate



straight rebate

Minimum rebate depth excluding spacer plate: 15 mm
Per spacer plate: - 2.5 mm

KP - adhesive pad



Additional charge €20.20 per system

Installation on the window bar

- Installation without screws at the top and bottom using clamping shoes with adhesive pads
- Adhesive pads with integrated clamping shoe lower section are stuck to the window bar. The clamping shoe upper sections are fastened to the adhesive pads

Special features

- Adhesive pad can be removed without a trace


Suitable for

- Plastic windows

Not suitable for

- Window bar depth < 19 mm
- Rounded window bar
- Use with magnetic catch


Installation accessories



Adhesive pad (white)



Not available with magnetic catch

Note about measurements

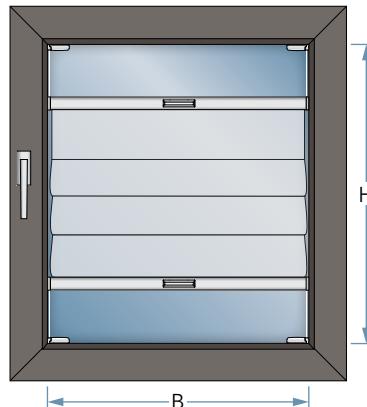


To establish any dimensional tolerances, measure the width (B) at several points. If these differ, specify the smallest width.


When installing with hinged adhesive pad, take the shape and size of the window bar into account.



Suitable for installation:




sloping rebate




straight rebate

Not suitable for installation:



rounded rebate




rounded rebate


KK - adhesive kit



Installation accessories




Adhesive kit with adhesive strip (white or grey)



Clamping shoe at top and bottom

Accessories for an additional charge



Clamping shoe with magnetic catch at top

Additional charge €44.20 per system

Installation on the glass

- Installation without screws using adhesive strips with clamping shoes
- Adhesive strips are stuck to the windowpane. The clamping shoes are pressed onto the adhesive strips
- Top rail locked to clamping shoes with magnetic catch (optional magnetic catch on the top rail)

Special features


- Adhesive strip can be removed without a trace

Suitable for


- Plastic windows
- Wooden windows
- Aluminium windows

Note about measurements

Measure the width of the seal on all four sides of the pane to identify any dimensional tolerances.




Straight rebate



D up to and including 5 mm

Seal width (D) <3 mm
inside width (LB) -4 mm
inside height (LH) -10 mm

Sloping rebate




D up to and including 5 mm

Seal width (D) <3 mm
inside width (LB) -3 mm
inside height (LH) -8 mm


Seal width (D) 3 - 5 mm
inside width (LB) -4 mm
inside height (LH) -12 mm

Seal width (D) 3 - 5 mm
inside width (LB) -4 mm
inside height (LH) -12 mm



D greater than 5 mm


Seal width (D) > 5 mm
inside pane width (LGB) +7 mm
inside pane height (LGH) -2 mm



D greater than 5 mm

Seal width (D) > 5 mm
inside pane width (LGB) +7 mm
inside pane height (LGH) -2 mm

FRT13

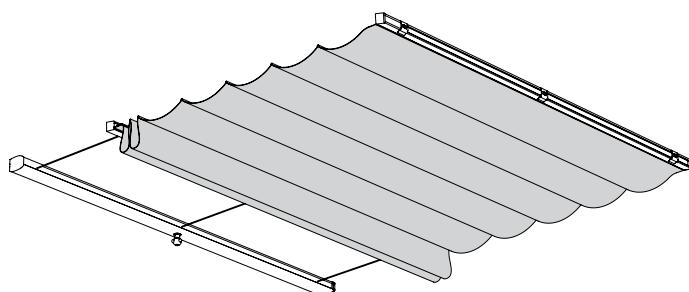

Description

- Tensioned system for sloping or horizontal installations in the ceiling area with fixed top rail (22 x 16.9 mm) and bottom rail (29.4 x 37.8 mm) made of aluminium
- Top and bottom rails fastened with clips
- Operating rail made of aluminium (22 x 16.9 mm)
- The fabric is attached to cross rods that are secured to stable black tensioning wires. Velcro and loop tape are used for the attachment to the top rail and operating rail.
- Stacking on one side
- Operated via a crank handle or an electric rod

Number of bracing wires

System width (mm)	Bracing wires
200	2
300	3
400	3
500	3
600	4
700	4
800	5
900	5
1000	5
1100	6
1200	6
1300	7
1400	7
1500	7

Installation option

Can be installed horizontally or up to a roof pitch of max. 30°.


Please note

We can accept no warranty claims for glass damage sustained once Roman blinds have been installed.

Profile colours

White
Anodised silver
Black brown

Profiles





Dimensions

Max. width x height
150 x 350* cm

Min. width x height
20 x 30 cm

Plastic colours

White
Grey
Black



* dependent on the fabric used

F - mounted in rebate

STANDARD



Installation in the glazing/window rebate

- Top and bottom rails fastened by screwed clips




Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Not suitable for

- Vertical windows

Installation accessories




Fastening clip




Fastening clip

Note about measurements

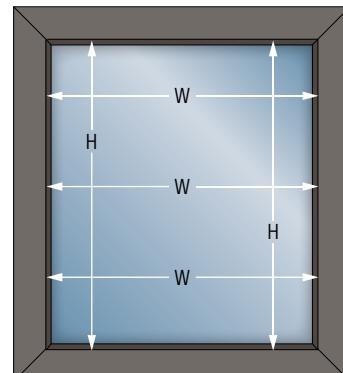

W: Width
H: Height

To establish any dimensional tolerances, measure the width W at several points. If these differ, specify the smallest width.




Min. Keep a gap of 10 cm from the glass and 5 cm at the top and bottom

W - wall bracket


OPTIONAL



Installation accessories



Wall bracket top



Wall bracket bottom

Installation on the frame

- Top and bottom rails fastened by screwed wall brackets with clips


Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows

Not suitable for

- Vertical windows

Note about measurements

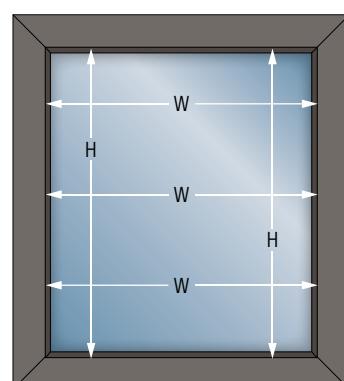


Order width:

W incl. desired excess

Order height:

H incl. desired excess*

* Excess at the top and bottom min. 25 mm each
(= height of the wall bracket)




X = Desired excess length/width


MP - installation profile




Installation accessories




Installation profile
(white, silver anodised, black brown, anthracite)



Angle bracket for installation profile



Support and retaining bolt for installation profile



Clamping kit for installation profile

Additional charges see page 21

Installation between the rafters

- The installation profile is fixed by screws crosswise between the rafters
- The system is fixed by clips screwed to the installation profile

Special features

- Used when the 10 cm gap from the glass or the 5 cm gap at the top and bottom for air circulation cannot be guaranteed


Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows

Not suitable for


- Vertical windows

Note about measurements

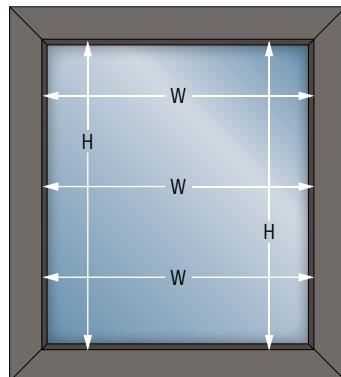

W: Width
H: Height







To establish any dimensional tolerances, measure the width W at several points. If these differ, specify the smallest width.



Min. Keep a gap of 10 cm from the glass and 5 cm at the top and bottom



ACCESSORIES

	<p>Handle 1x handle</p> <p>For model: FRT06, FRT07</p>	white grey black brown anthracite
	<p>Designer handle 1x designer handle</p> <p>For model: FRT06, FRT07</p>	white silver anodised black
	<p>Crank handle 1x crank handle 1x operating rod / crank clamp 2x screw 3.5x16 - Phillips</p> <p>For model: FRT13</p>	125 cm 150 cm 200 cm 250 cm
	<p>Electric rod with battery and charger 1x Electric rod 1x Battery 1x Charger 1x operating rod / crank clamp 2x screw 3.5x16 - Phillips</p> <p>For model: FRT13</p>	125 cm 150 cm 200 cm 250 cm
	<p>Operating rod / crank clamp 1x operating rod / crank clamp 2x screw 3.5x16 - Phillips</p> <p>For model: Operating rod and crank handle</p>	grey
	<p>Clamp mount for clamping shoe 4x clamp mount with clamping shoe</p> <p>For model: FRT07</p>	white grey black brown
	<p>Sealing pad 4x sealing pad</p> <p>For model: Clamp mount installation</p>	black

Please note that reduced discount rates apply to the sales prices in blue.

