



KADECO®

MICROTEX ROLLER BLINDS

TECHNOLOGY AND PRICES
STARTING 05/25



MICROTEX ROLLER BLINDS – EFFECTIVE AND MULTIFUNCTIONAL GLARE PROTECTION

Daylight in rooms not only improves our mood; it also increases motivation and willingness to perform. However, glare as a result of excessive sunlight can have the opposite effect, while also damaging the eyes.

microTex roller blinds from KADECO counteract unwanted glare in the workplace and combat the heating-up effect of sunlight in rooms. It is also worth taking note of the ergonomic requirements for office work with visual display terminals in ISO 9241-6.

If you're looking for flexibility in the design of your glare protection, privacy shielding, sun protection and measures for preventing rooms from being heated by the sun, then microTex roller blinds provide the very best conditions for doing so. The roller blinds can be adapted to on-site conditions with a variety of laminates or fabrics according to the intensity of the sunlight and where your windows are facing. For example, you have the choice between maintaining a line of sight with the outside world by using transparent laminates, and using thick fabrics to achieve maximum glare protection and privacy shielding.

The features at a glance

Laminates

- PET laminate (a flame-resistant quality according to DIN 4102-B1)
- Available in various colours and transmission grades
- Good glare and anti-heating protection with a highly reflective, silver outer surface
- Highly stable laminates and attractive appearance thanks to diamond stamping
- Produced using a calender manufacturing process, thus ensuring high uniformity
- Maximum height up to 240 cm, depending on quality and width

Textile fabrics

- PES fabric (flame-resistant according to DIN 4102-B1)
- Available in various colours and transmission grades
- Trevira CS fabric (B1/M1 according to DIN 4102-1)
- Dim-effect fabric also available (not blackout)
- Combination of a textile appearance with effective glare protection
- Pleasant transparency to the outside world
- Natural colour reproduction in rooms
- Maximum height up to 220 cm, depending on quality and width




Pleated (1)



Semi-transparent



Smooth

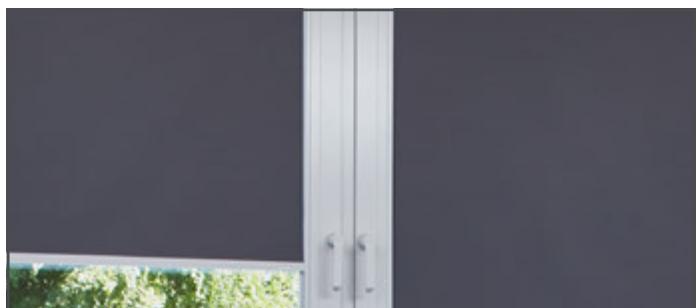

Dim-effect

COMPACT WINDOW GLARE PROTECTION

The one-piece, square cassette has a cross-section of 34 x 33.5 mm and is bolted on its side by plastic end caps. The cassette is attached using a connector on the side guide rails, which are available in various models. The cassette is operated using a chain pull mechanism with an anti-fall safeguard for infinitely adjustable drape positioning.


The 4.5 mm continuous bead chain is available in white, grey and black to match the other plastic parts. Subject to an additional fee, the operating chain is also available as a metal version. microTex roller blinds are supplied ex-works with a chain holder. The operating length can easily be reduced on site if required. Please note that the operating length of the chain must be at least 2/3 of the system height. Please also observe the requirements of EN 13120 (child-safe operation and exceptions in the commercial sector) for on-site installation.



Colours/models

All profiles are available powder coated in white (RAL 9016) or in anodised silver (E6/EV1) as standard. For an additional fee, these are available in any special RAL colour on request.


All plastic parts are made of UV-resistant and non-wearing materials which are available in white, grey and black.

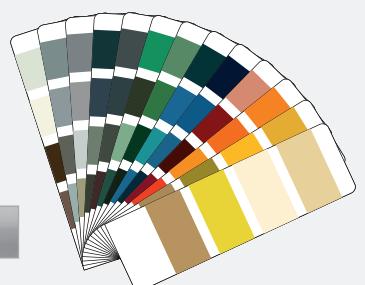

Profiles




White, RAL 9016




Anodised silver E6/EV1

Plastic parts



White



Grey




Black

SYSTEM DESIGN

KADECO offers a variety of side guide rails made from extruded aluminium for different installation types. The special adhesive tape applied at the factory ensures permanent, UV-resistant attachment of the profiles to the window casement and frame. Alternatively, the profiles can also be bolted to the casement on the front or front-facing side. The side guide rails are not fitted with any end caps.

Two different bottom end profiles are available for the microTex roller blind which are guided on the sides with plastic end caps. The smaller model (AF), at 12 x 11 mm, is only suitable for combining with laminate materials. The higher profile (AK), at 20 x 11 mm, accommodates beading and can therefore be combined with textiles as well as laminate materials. In addition, this profile has a retainer for an optional brush seal at the bottom.

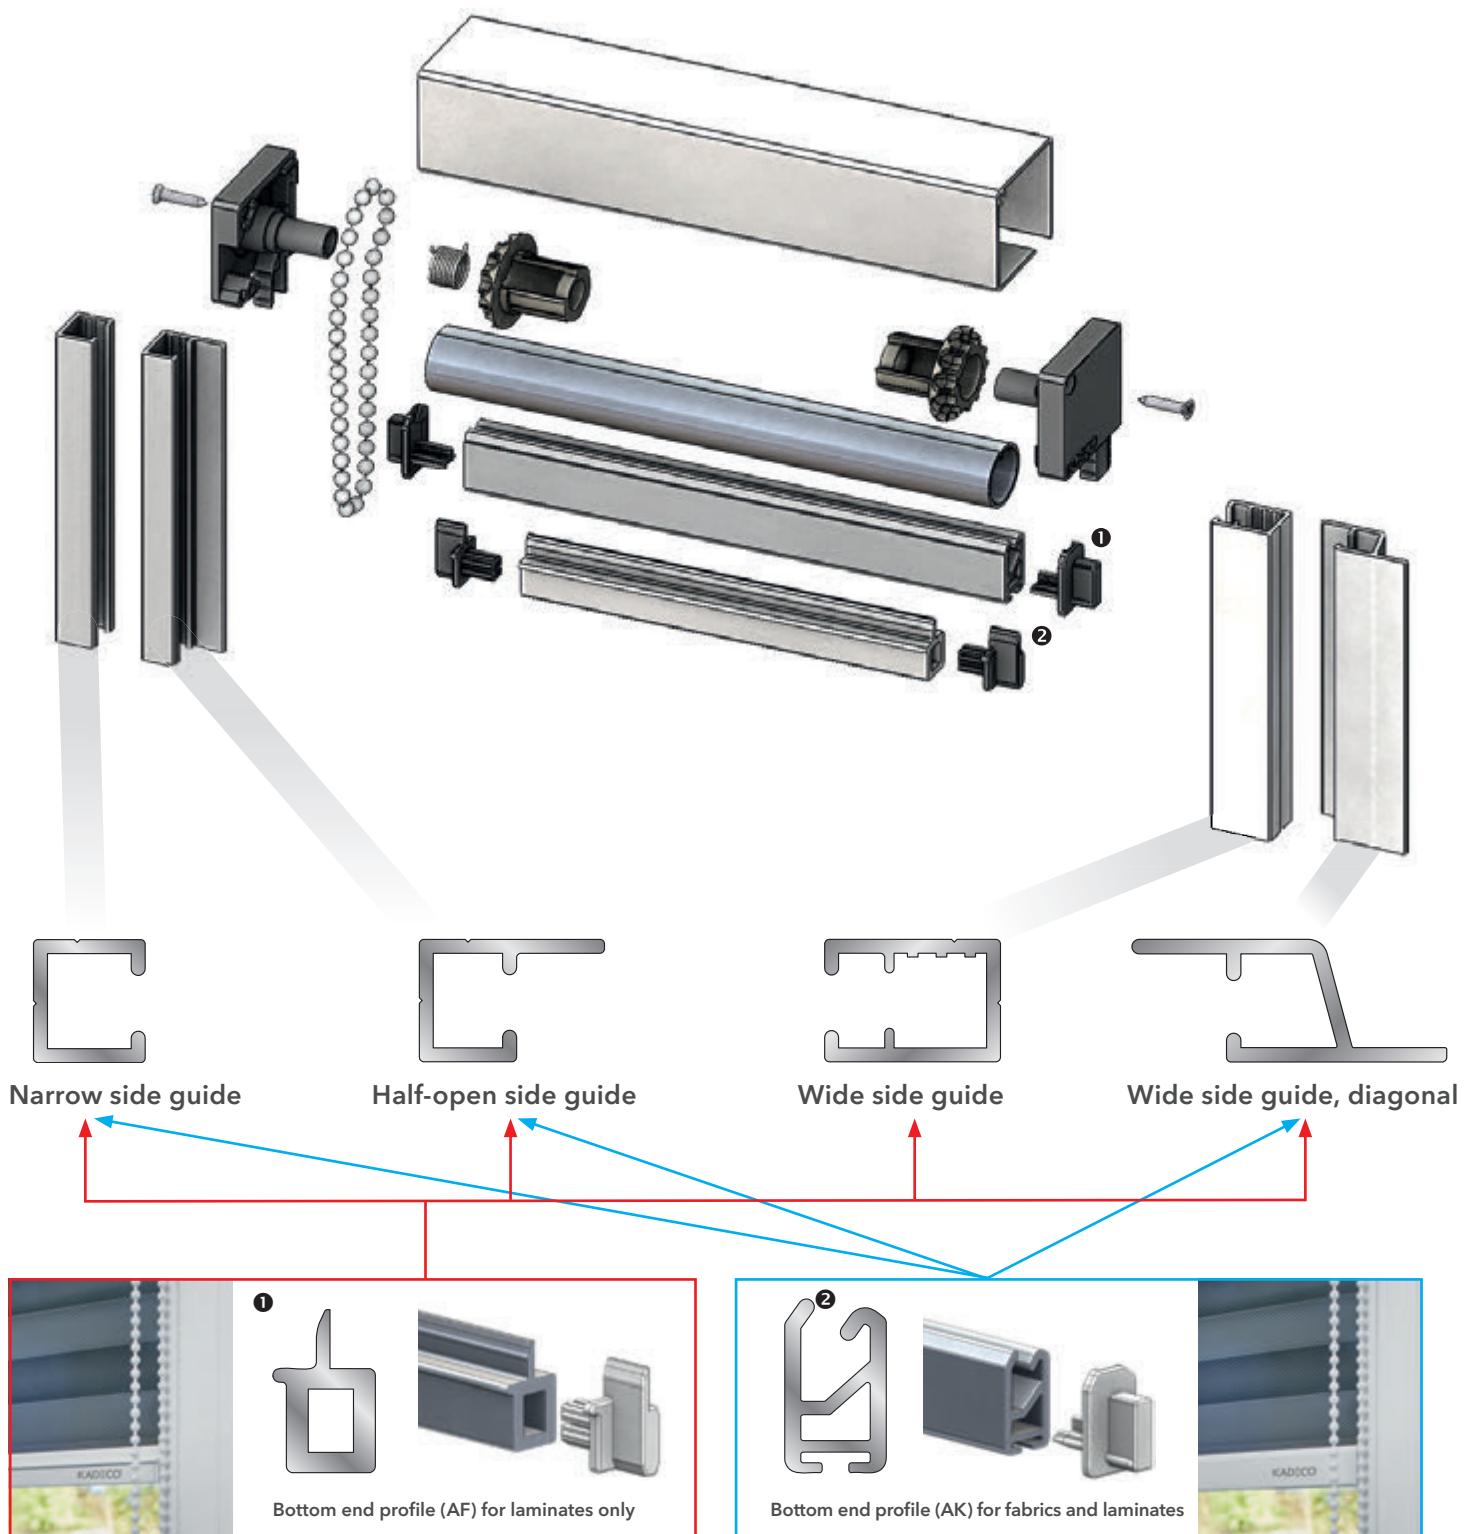


SIDE GUIDE RAILS

Installing microTex roller blinds

microTex roller blinds are fastened to the installation substructure with the side guide rails. The side guide rails can be fastened to the installation substructure either with special adhesive tape (already applied at the factory) or by bolting them directly to it (profiles can be pre-drilled on request). The cassette can then be easily




inserted into the side guide rails from above. A required space of approx. 15 mm must be allowed for at the top. For flush top installation in the glass rabbet, the cassette is already fitted prior to the installation of the side guide rails.

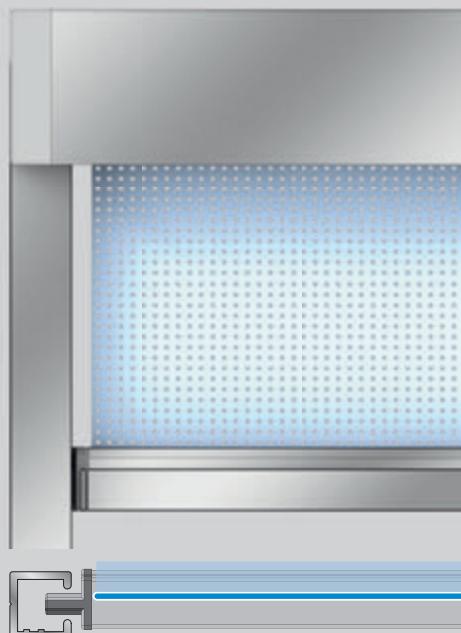

Narrow side guide


2 x 13 mm profile for straight window bars

- No covering of the drape with 4 mm light-permeable gap
- Unobtrusive side guide rail
- Installation on the window frame
- Installation at 90° in the right-angled glass rabbet



Profile with screws




Profile with adhesive tape*

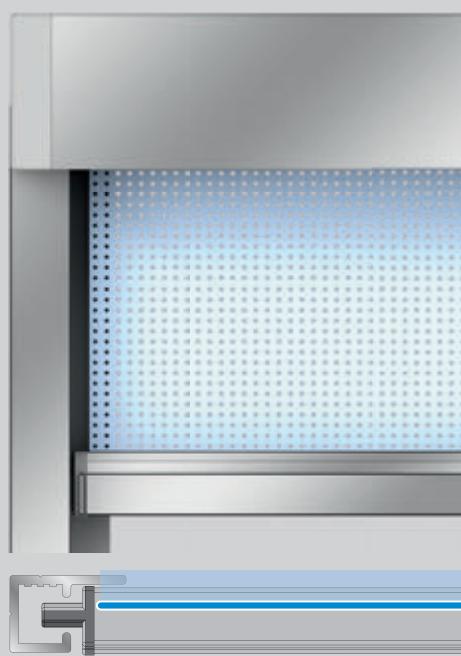

Half-open side guide



11/20 x 13 mm profile for straight window bars

- One-sided covering of the drape to the rear without a direct light-permeable gap (lateral diffuse light possible)
- Unobtrusive front side guide rail
- Fitted with additional profile bridge on the rear for covering the drape
- Glare protection across the entire system width
- Installation on the window frame
- Installation at 90° in the right-angled glass rabbet



Profile with screws

Profile with adhesive tape*

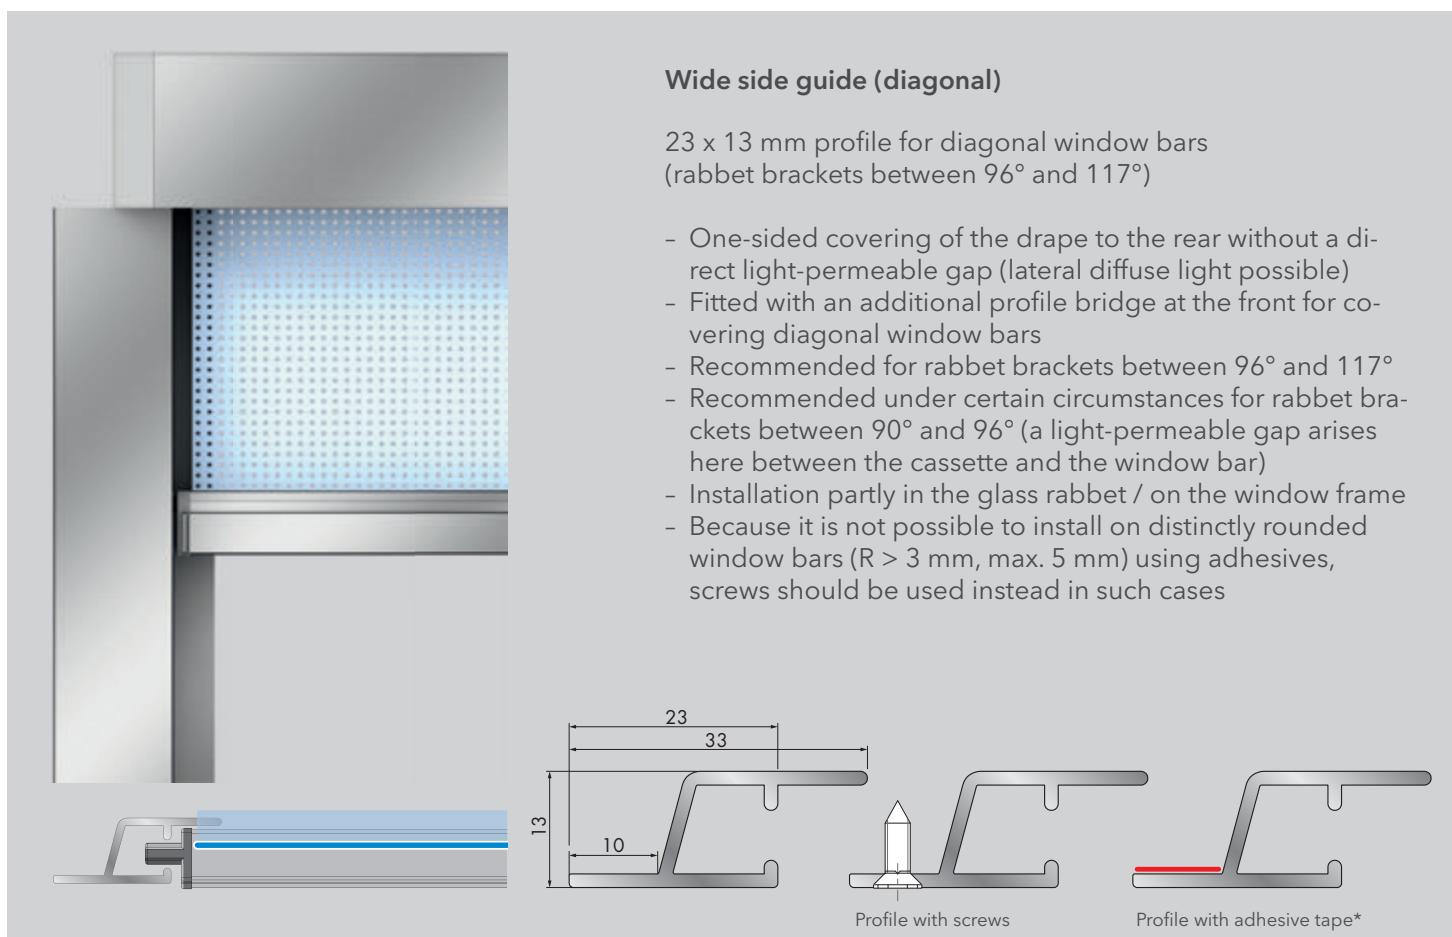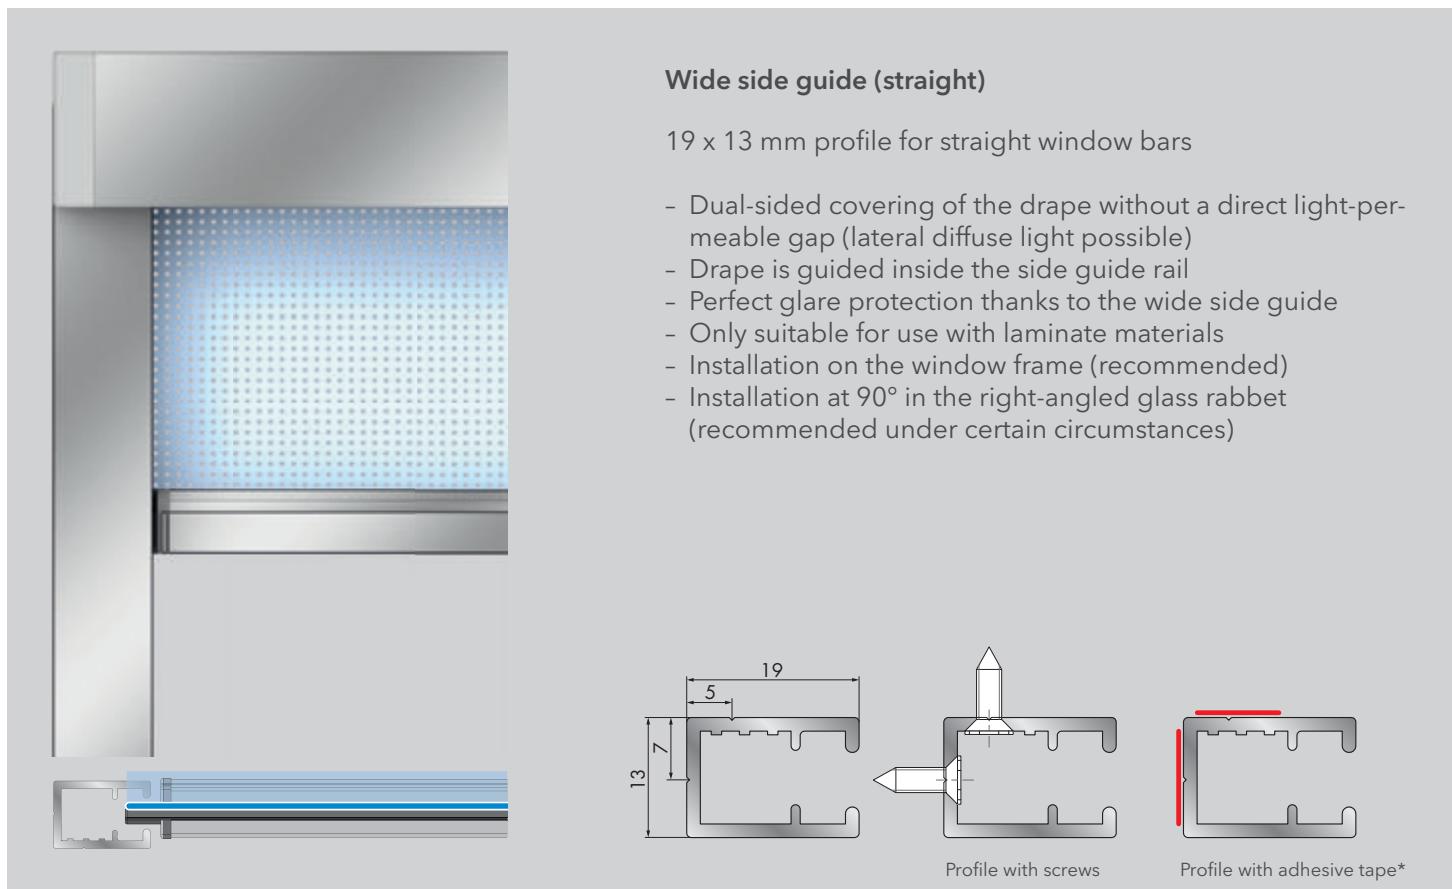

* Only one adhesive tape is applied at the factory for wall or alcove mounting - not suitable for installation on wooden windows.


NOTES ON MEASURING AND INSTALLATION

microTex roller blinds were designed for installation on vertical casements and are not suitable for operation on sloped windows (e.g. rooflights). For installation using adhesives, the underlying surface must be clean, level and free of grease in order to ensure a firm hold.

Measure the inside dimensions at several points and bear in mind that the microTex roller blind can only be installed in right-angled casements (check the cross measurement).


The installation type (adhesive or screws) and the installation position (in or on the casement) must always be specified when ordering.

When installing in a diagonal window bar using the diagonal side guide rail, the width and height clearances must be measured on the front edge (to the room). We also need you to specify the window bar angle.

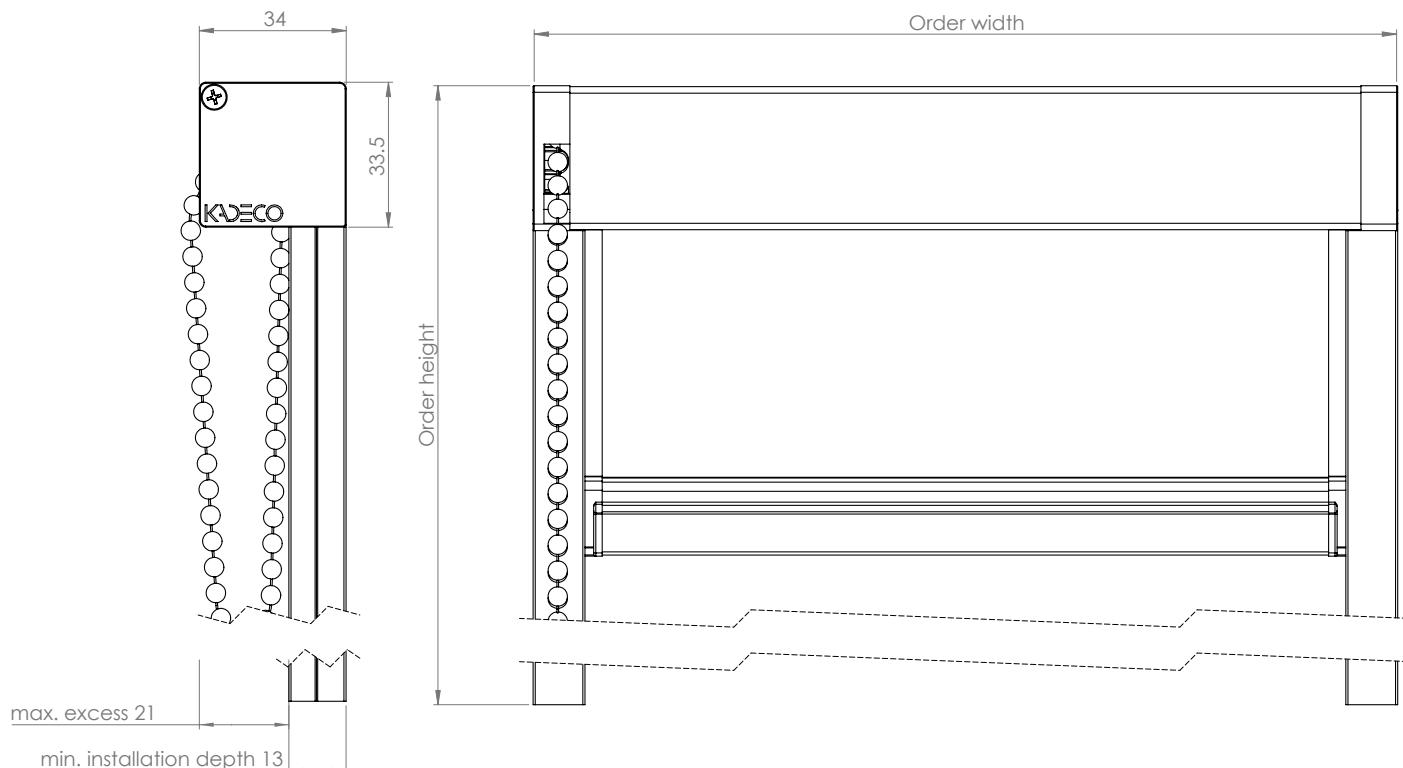

ORDERING AND CALCULATING THE PRICE

Installation on the frame

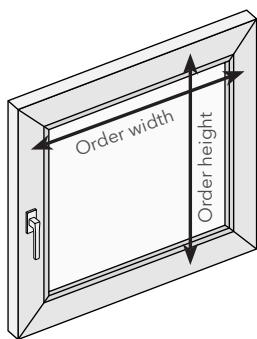


Order width = Edge of window bar + required excess = price width

Order height = Edge of window bar + required excess = price height

Important note:

When measuring, please take account of any protruding objects, such as hinges or window handles, and make sure that the window can continue to open fully.

Installation in a straight window bar

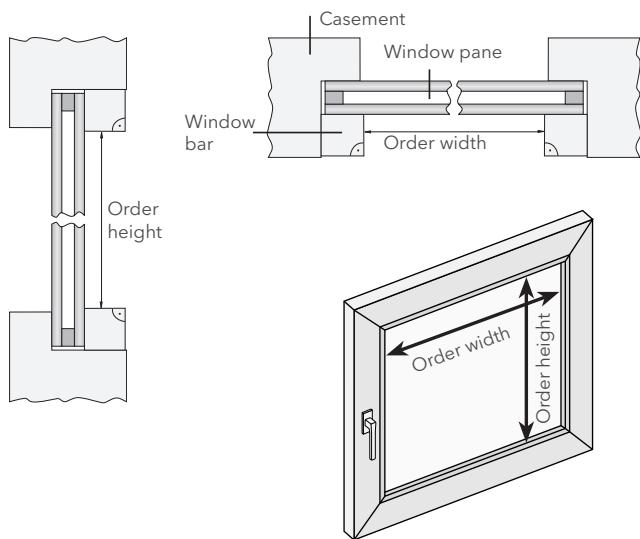


Order width = window bar internal dimension minus 1 mm = price width

Order height = window bar internal dimension minus 1 mm = price height

Important note:

The minimum window bar depth is 13 mm

Installation in a diagonal window bar

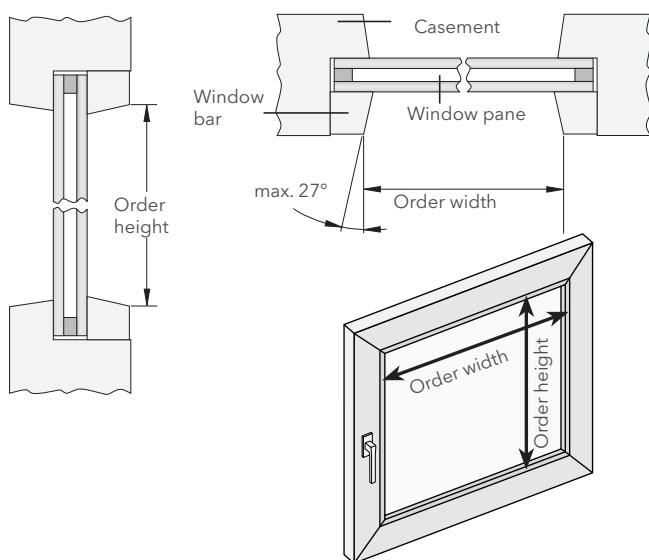

Order width = window bar front edge minus 1 mm = price width

Order height = window bar front edge minus 1 mm = price height

Important note:


The minimum window bar depth is 12 mm.
The maximum window bar angle is 27°.

The window bar angle must always be specified when ordering.


Fabrics





41500




43496

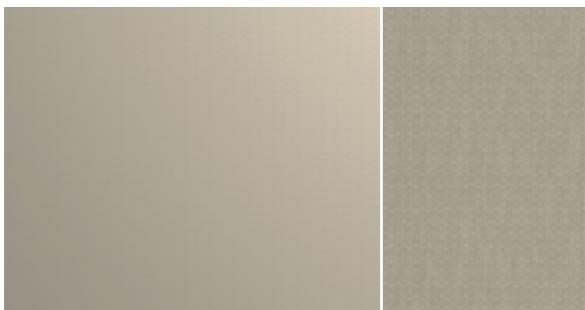



41504

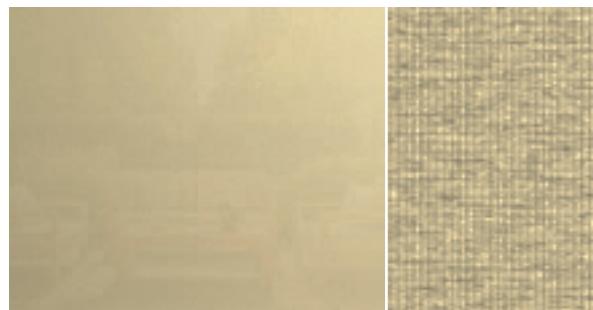

43497

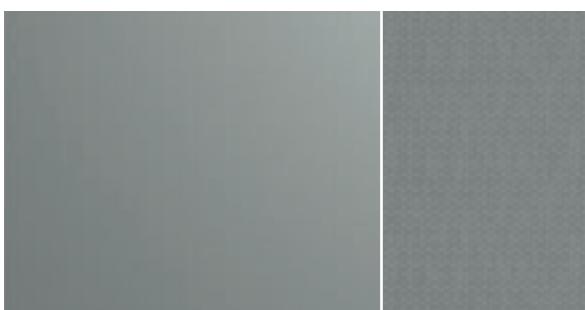

41503

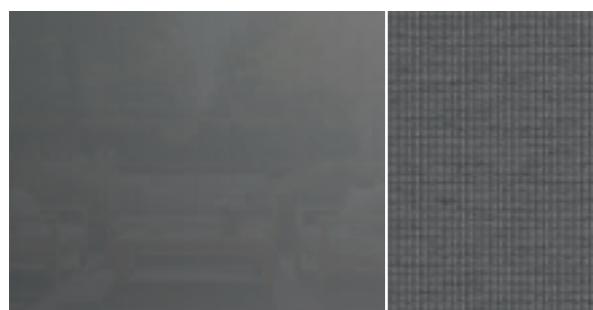


43498



The right-hand side of the illustrations shows the respective fabric sample and the left-hand side shows the corresponding view from inside and transparency of the sample with backlighting. Please refer to the original sample, since colour variations can occur due to printing.

Art. no.	Material	Weight	Flammability	UV protection	Photometric values			Solar values			Wash	Recycling	Waste	Check	Warranty	
					L _R	L _T	L _A	S _R	S _T	S _A						
41500	PES	-	165	B1	≥5	68	0	32	49	0	51	-	-	-	-	-
41503	PES	-	165	B1	≥5	68	0	32	49	0	51	-	-	-	-	-
41504	PES	-	165	B1	≥5	68	0	32	49	0	51	-	-	-	-	-
43496	 	115	B1/M1	5-6	53	13	34	55	13	32	-	-	-	-	-	-
43497	 	115	B1/M1	5-6	52	11	37	54	12	34	-	-	-	-	-	-
43498	 	115	B1/M1	5-6	48	9	43	51	11	38	-	-	-	-	-	-

Art. no.	Width < 700 mm max. Height (mm)	Width = 701 mm - 1000 mm max. Height (mm)	Width = 1001 mm - 1500 mm max. Height (mm)
41500-41504	2060	1900	1800
43496-43498	1600	1600	1600

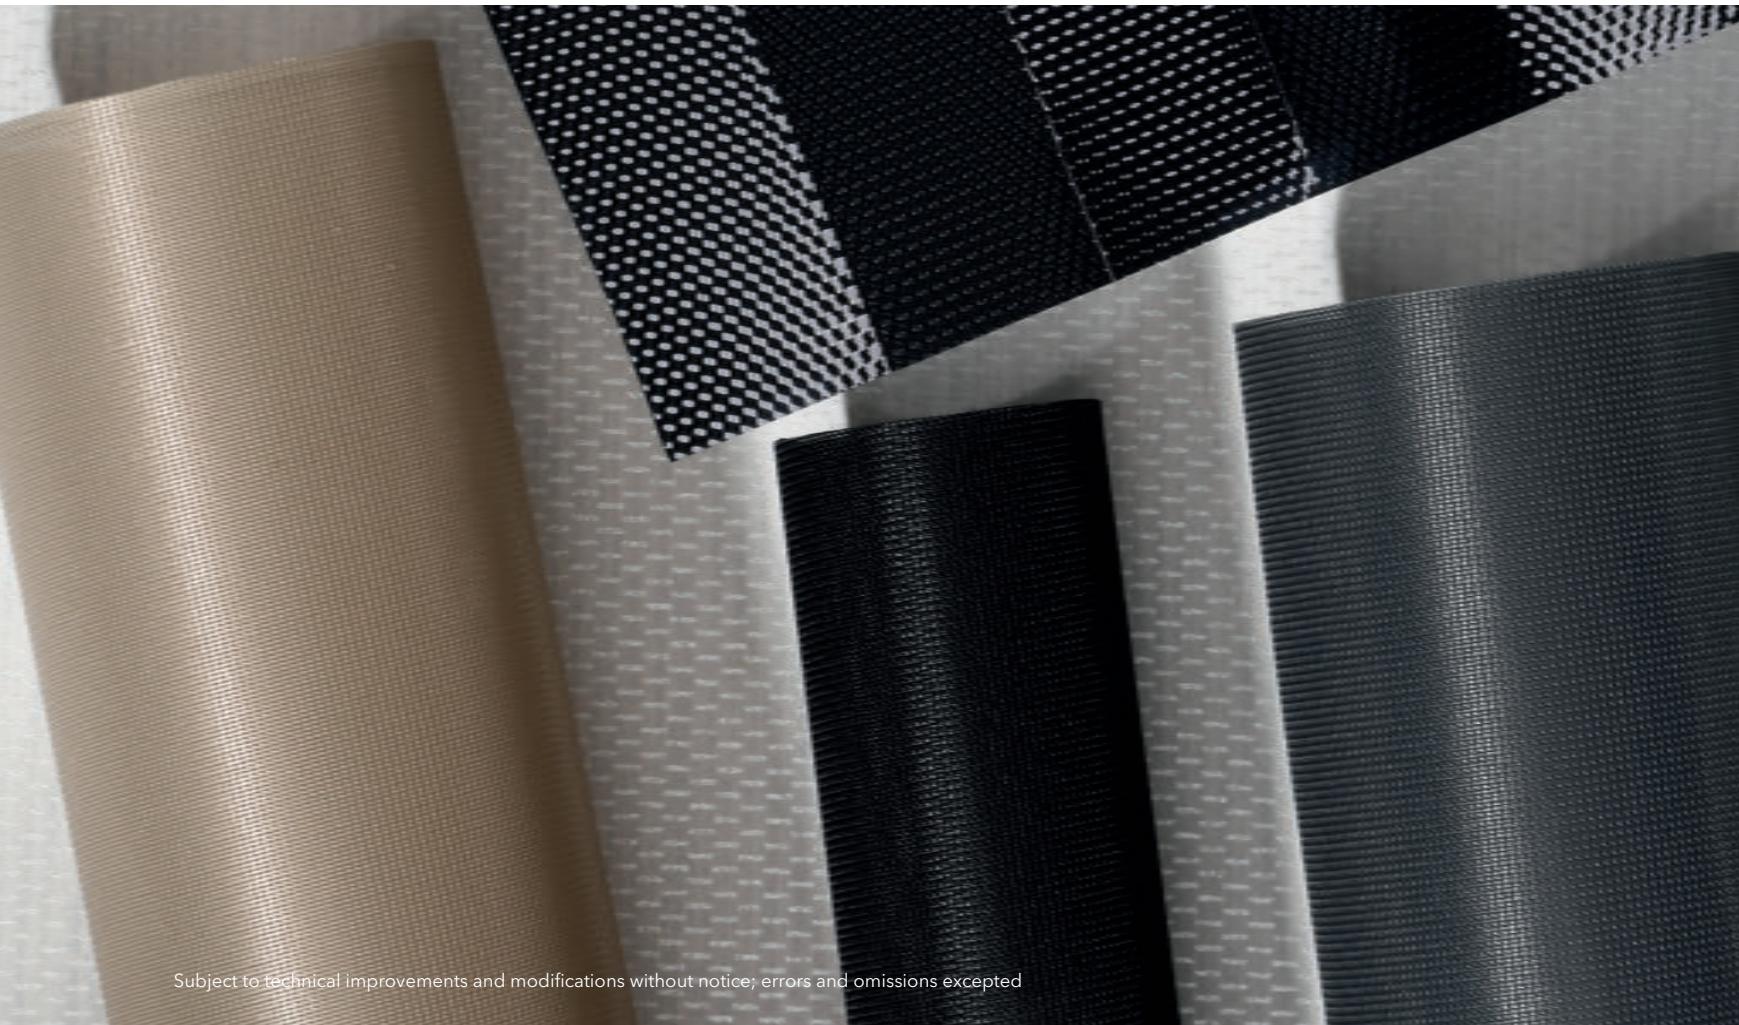


Fabrics

Laminates



43285

0




51637

1 2 2 2 3 0




43286

0

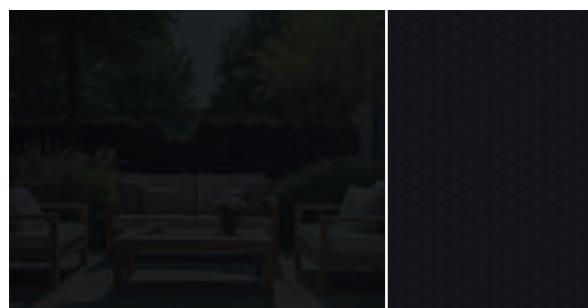


51639 (€)

1 3 1 1 1 0

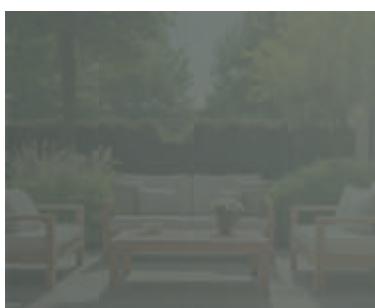


43287

0

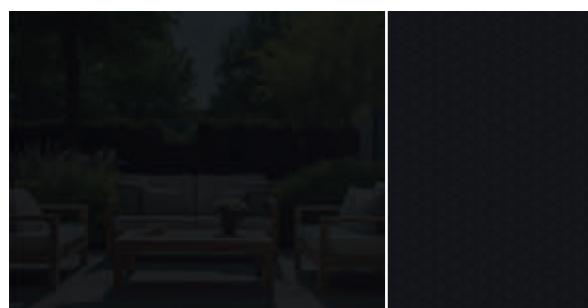


51638

1 3 1 1 1 0

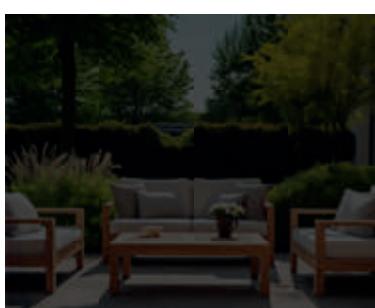

43288

0

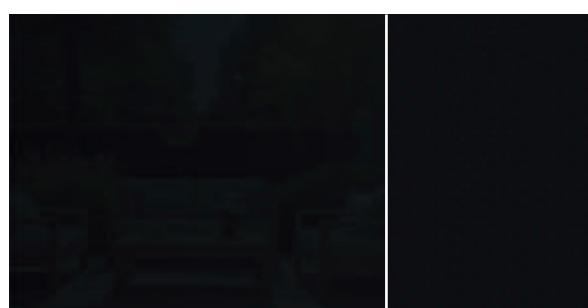

51006 (€)

1 2 2 2 3 0

The right-hand side of the illustrations shows the respective fabric sample and the left-hand side shows the corresponding view from inside and transparency of the sample with backlighting. Please refer to the original sample, since colour variations can occur due to printing.

Art. no.	PES	ALU	100	B1	≥5	Photometric values			Solar values			Wash	Recycle	X	Check	W
						L _R	L _T	L _A	S _R	S _T	S _A					
43285	PES	ALU	100	B1	≥5	40	20	40	40	20	40	-	-	-	-	-
43286	PES	ALU	100	B1	≥5	40	20	40	40	20	40	-	-	-	-	-
43287	PES	ALU	100	B1	≥5	40	20	40	40	20	40	-	-	-	-	-
43288	PES	ALU	100	B1	≥5	40	20	40	40	20	40	-	-	-	-	-
51006	PET	ALU	98	B1	7	69	3	28	70	3	27	-	-	-	-	-
51637	PET	ALU	98	-	7	70	3	27	71	3	26	-	-	-	-	-
51638	PET	ALU	98	-	7	50	9	41	52	9	39	-	-	-	-	-
51639	PET	ALU	98	-	7	50	9	41	52	9	39	-	-	-	-	-

Art. no.	Width < 700 mm max. Height (mm)	Width = 701 mm - 1000 mm max. Height (mm)	Width = 1001 mm - 1500 mm max. Height (mm)
43285-43287	1900	1900	1900
51637-51638	2400	2400	1800
51639	1750	2400	1400
51006	1800	1800	1400



SYMBOLS AND FINISHING

The climate in a room and the optical effect of a roller blind are dictated by the fabric's response to incident sunlight. For the purpose of making technical estimates, we assign percentage light and solar values to each individual fabric.



Blackout



Translucent



Transparent

Photometric values

In physics, the visible range of the spectrum between 380 and 780 nm is defined as light. The reflection, transmission and absorption values indicated below always add up to 100 %.



Reflectance (visual)

The light reflectance according to EN 14501 indicates which proportion of visible sunlight is reflected by the fabric.



Transmittance (visual)

The light transmittance according to EN 14501 indicates which proportion of visible sunlight can penetrate the fabric.



Absorption (visual)

The light absorption according to EN 14501 indicates which proportion of visible sunlight is absorbed by the fabric.

Energy values

The effect of the sunshade on the system comprising glazing and interior sun protection is defined using two key technical indicators: total energy transmission value (g_{total}) and reduction factor (F_c).



Total energy transmission value

The total energy transmission value (g_{total}) according to EN 13363-1 (simplified method) indicates how much solar energy can penetrate the overall system of glazing and sun protection into the room. If the aim is to save cooling energy in summer or prevent the room from heating up, then the total energy transmission value must be minimised. The sunshade should therefore reduce total transmission - the total energy transmission value should be as low as possible



Solar values

Solar radiation in both the visible and the invisible ranges must be considered when calculating the total energy transmission value. These values differ.



Reflectance (solar)

The solar reflectance according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) is reflected by the fabric.



Transmittance (solar)

The solar transmittance according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) can penetrate the fabric.



Absorption (solar)

The solar absorption according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) is absorbed by the fabric.



Reduction factor

The reduction factor (F_c value according to EN 14501) indicates how much a sunshade reduces the energy entry through the window. It can be a value between 0 and 1, and depends on the glass used. The F_c value should be as low as possible, as this would indicate particularly effective sun protection.

DSE WORKSTATION SUITABILITY

Provide the best light for your employees

Daylight makes you feel happy, energetic and productive. These positive attributes can also be brought into the workplace - without unpleasant side-effects such as glare, heat radiation or reflections on computer screens. The design of modern workplaces actually has such a significant effect on the health and well-being of employees that information, guidelines and legal regulations have been created to ensure this is taken into consideration.

From 1996 to 2016, the German Screen Work Ordinance (BildscharbV) represented the German implementation of the authoritative EU regulations in this area. When the German Workplace Ordinance (ArbStättV) was amended on 3 December 2016, the BildscharbV was merged with the ArbStättV, which is legally binding in Germany. The ArbStättV covers every aspect of designing workplaces and working conditions with regard to the health and safety of employees.

What are considered good conditions for DSE workstations?

- Every window must be fitted with a suitable, individually adjustable privacy shield and glare protection device
- Annoying reflections and glare on screens must be prevented as much as possible
- Equipment should be adjustable so that users have a line of sight to the outside world, for most of the time at least
- It must be possible to react flexibly to changing daylight conditions
- The workplace must be sufficiently lit
- Screens must be at an approximately 90° angle in relation to the window in order to reduce reflections in general (note examples provided by the German Social Accident Insurance)

Practical information about implementing the EU directive can be found at:

German Social Accident Insurance
DGUV Information 215-444
(sun protection in offices).

You can find additional information on this topic in the brochure "Optimale Lichtbedingungen für Bildschirmarbeitsplätze durch innenliegenden Sicht- und Sonnenschutz" (Optimal lighting conditions for DSE workstations via internal privacy screens and sunshades) by the ViS (Association of internal sight and sun protection systems).

Find easy and attractive ways to implement legal requirements with KADEC

Workplace windows must have an effective and flexible glare protection system in place so that employees can benefit from daylight, but won't be disturbed. Since you can individually react to the amount of incident light with KADEC's interior privacy screens and sunscreens, these are suitable as internal glare protection at the workplace.

Current legal requirements, standards and directives:

- German Workplace Ordinance, ArbStättV, Appendix 6 (measures for the design of DSE workstations)
- Technical regulations for workplaces, ASR 3.4 (lighting)
- German Social Accident Insurance, DGUV Information 215-444
- Lighting of work places - Indoor work places, DIN EN 12464-1
- Ergonomic requirements for office work with visual display terminals, DIN EN ISO 9241-6

Comments

This information does not claim to be complete, and does not exclude any other equivalent technical solutions that are equally safe. In certain unfavourable situations, additional externally located glare protection may be necessary.



CHILD-SAFE OPERATION AS PER EN 13120

The European standard EN 13120 stipulates special requirements in respect of the child safety of sunscreens. The aim is to minimise the risk of a small child being strangled by operating chains or cord loops. If a product is fitted with such operating mechanisms, a minimum floor clearance (generally 150 cm) and the use of special safety components are mandatory.

Because the system is fitted with a chain holder at the factory, it is also possible to install the roller blinds for domestic use according to the requirements of the standard.

As a responsible manufacturer, we naturally make sure that our products comply with this standard and offer child-safe operating mechanisms for all of our models. When selecting your KADECOKO sunscreen, please bear in mind any local constraints in respect of child-safe and convenient operation.




Further information is available at www.kadeco.de, from your local industry association (e.g. in Germany: ViS – Verband innenliegender Sonnenschutz) or your national standards body.



Notes

KADECO microTex roller blinds are made to order; they are non-returnable and non-exchangeable. The side guide rails can be prepared for adhesive or screw-assisted installation and are included in the price. The standard scope of delivery also includes a chain holder, 2 chain stoppers and a connecting clip.

ACCESSORIES

Article	Article description
	Brush seal Grey Brush insert for bottom end profile AK 4.8 x 5 mm 4.8 x 9 mm
	Aluminium drop-in profile for covering the bottom horizontal light-permeable gap on the bottom end profile White
	Plastic drill-hole covering 10/7.2 x 2.2 mm White Grey Black

KADECO®

You can find our current Terms and Conditions on our website at www.kadeco.de.
Our prices valid at the time of conclusion of the contract shall apply and are available on request.

KADECO Sonnenschutzsysteme GmbH · www.kadeco.de

© KADECO · MTKROMT-GB-€-0525 · Full or partial reproduction subject to prior written approval.
Subject to technical enhancements and modifications without prior notice; errors and omissions excepted.