



Model 1710)

Rectangle with two operable rails, cord brake

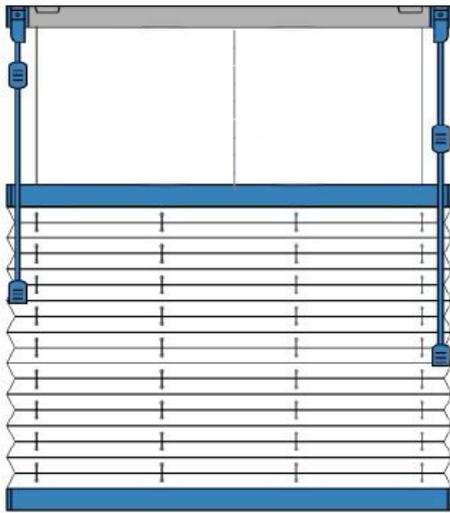

(model 1715 with anti-swing system)

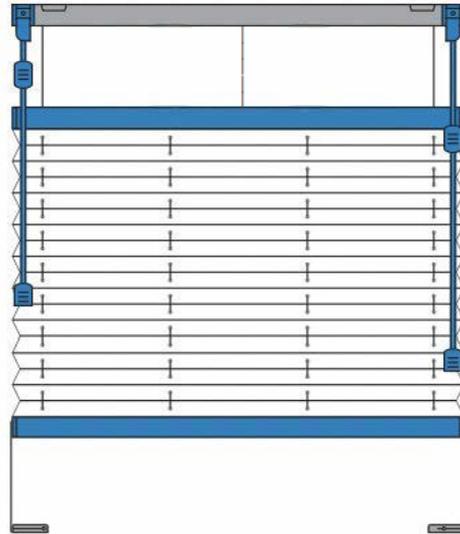

- Design: Free-hanging system with 2 pull cords and a variable curtain including pendulum protection
- Suitability: For vertical rectangular windows
- Installation: In the glazing bead, on the wall and architrave, in the recess, on the ceiling
- Operation: One pull cord on the right and one on the left for separate operation of the upper and lower rails.
Integrated pull cord brakes.
- Profile colour: optionally aluminium, white, black, or bronze
- Tensioning: 0.8 mm pull cords in a colour matching the fabric, threading depending on the system width

This type is a honeycomb and pleated blind with a contemporary slim profile/rail of 22mm width and 17mm height, that can be moved freely in front of the window and can be stabilised at the bottom rail by tensioning feet (anti-swing mechanism) if chosen (model 1710). The system is operated using pull cords, with only one cord visible in the middle of the blind. The blind is lowered from the top and one on each side, 7 cm in from the rail end. It is attached with clips in the window recess, or with a min 19mm glazing bead, to the ceiling with clamp brackets, or to the wall or architrave with mounting brackets and clips. In addition to a huge selection of fabrics, you can choose from different profile colours to put together a unique privacy and sun protection system tailored exactly to your needs.

Adopt

Model 1710:

MIN

min. width: 300 mm
min. height: 200 mm

MAX

max. width: 2970 mm
max. height: 3000 mm
max. area: 5.7 m²

Model 1715:

MIN

min. width: 300 mm
min. height: 200 mm

MAX

max. width: 2200 mm
max. height: 2600 mm
max. area: 5.7 m² max. inclination: 15°