


TECHNICAL DATA

MODEL WVS2 - BRACED HONEYCOMB AND PLEATED BLIND SYSTEM 2022

System up to 1500mm width:

Centre tension cords visible from the system width 1500mm to 2000mm:

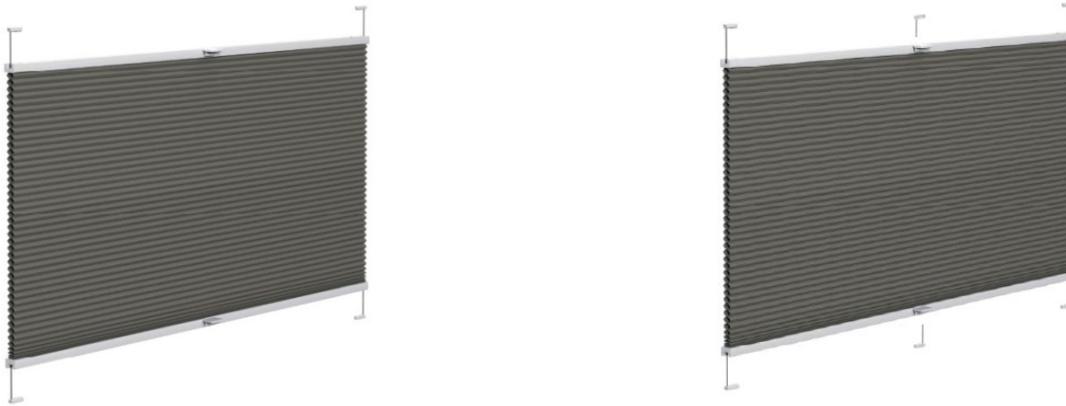

Product Description

Custom-made, braced/tensioned pleated or honeycomb blind for vertical windows with freely movable upper and lower rail made of aluminium. The blind is attached at the top, and the bottom rail via a two-piece tension shoe. Optionally, the lower or upper rail can be locked to the tension shoe via magnetic latching at the top or bottom, or on both sides. The magnetic latch and a design handle made of metal are already included in the Elegance version (model WVS2E). The profiles are available in white, anodised aluminium, anthracite and black. Screwless installation is optionally possible.

Size ranges

Package Height Table

Dimensions

Modelle WVS2(E)


Max. width 200 cm*
Max. height 200 cm

or

Max. width 120 cm
Max. height 220 cm

Min. width 23 cm
Min. height 20 cm

System height in cm




50
100
150
200
220

Package height in cm



max. 6,0
max. 7,5
max. 9,0
max. 10.5
max. 11.0

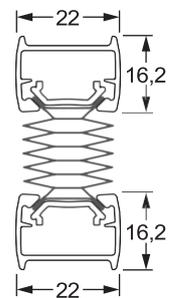

WVS2

* Systems over 150 cm wide are manufactured with 6 tension shoes. NOTE: TWOTENSION CORDS IMMEDIATELY NEXT TO EACH OTHER ARE VISIBLE IN THE CENTRE OF THE BLIND, WHEN THE BLIND IS LOWERED OR RAISED

* Only available for recess, wall and architrave mount!

Operation

Manual

with plastic control handle (standard)

Optionally with
- Control handle for control rod / control rod
- Design handle made of metal



Standard plastic control handle



Control handle for control rod



Design handle made of metal

Operation Options

1) Balancing (default)

Horizontal synchronisation of both control rails for the WVS2 model.

2) **Magnetic latching:** Includes tension shoes with an integrated magnet for secure hold of the control rail. Optional per control

WVS2E, WVS2, WVS1 Technical changes, further developments and errors excepted.

Mounting Options

Screwed

WVS2 above

WVS2 bottom

Installation in the window recess or glazing bead

- 1) with Tension Shoe



Mounting on the wall or architrave.

- 2) with wall bracket and tension shoe



Mounting on the glazing bead.

- 3) with glazing bead angle and tension shoe

This mounting option is only possible with a minimum glazing bead depth of 10mm.



Screwless -ADHESIVE MOUNT

- 1) Mounting on the glazing, adhesive strip and tension shoe. **(larger width possible with model)**



- 2) Mounting on the glazing bead adhesive pad (without magn. Latching) **The mounting option is only available on a U-PVC window.**



Screwless-CLAMP MOUNT

- 1) Installation on the window sash, The system runs in the glass fold with a bow strap **This mounting option is only possible in folding doors and inward-opening tilt and turn windows.**



Colors

Profiles

The profiles of the control rails and the components used
They are available in different colours depending on the system type.

Plastic parts

Operating handles, tension shoes and end caps are coloured on
The four optional profile colours are coordinated.

Honeycomb and Pleated Blind fabric Collection

Extensive colour and motif selection with more than 320 positions

- Different degrees of transmission from translucent to darkening
- A wide variety of materials and fabric types from linen look and crush look to Scherlis and jacquards
- Numerous theme and trend cards
- Partly flame retardant, B1 according to DIN 4102. Trevira CS
- Colour and quality sorting for various applications in the building