

KADECO®




ROMAN BLIND TENSIONED

TECHNOLOGY



FRT07

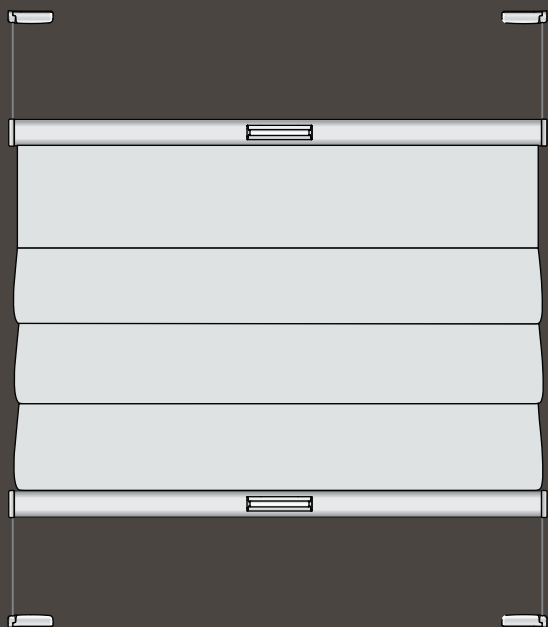

INTRODUCTION

Top-down and bottom-up (TDBU) Cordless blinds, also called tension-cord blinds, make great Privacy blinds for any room of the house.

They can mount in the recess, wall or architrave, or mounted directly on to the glazing via adhesive fastening.



Operating the blinds by moving the top or bottom rail gives you great flexibility. Having the lower half of the window covered, even slightly raised blinds from below, can greatly impact what a passersby can see from the outside, while giving you a clear view of the outside above, making your living environment cozier and more secure.

Many of our fabrics are OEKOTEX 100 certified, fabrics that are tested and free of harmful chemicals. Cordless blinds have no cords and are ideal for kids' rooms.

Cordless blinds rails come in four colours, black, white, silver and anthracite, which can be matched with free-hanging models for windows wider than 1500mm, as the top rail in our free-hanging models is covered by the same fabric.


All fabrics from our blind models can be completely detached, washed, and reattached, giving you also the possibility to have multiple sets to change up the style

FRT07

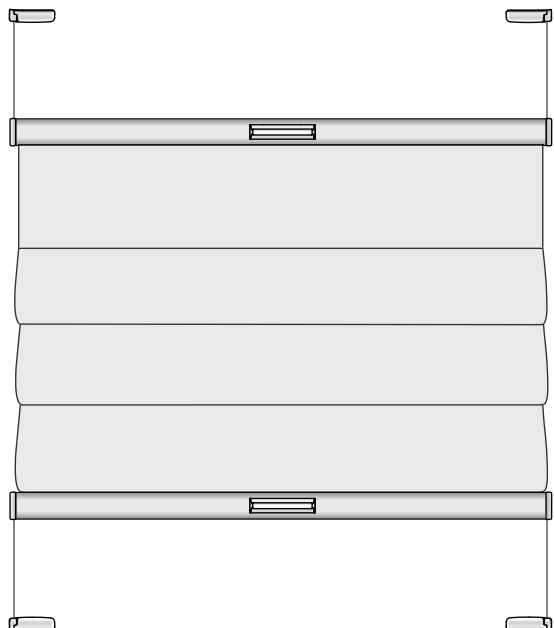

Handle
1x handle

white
grey
black brown
anthracite



Designer handle
1x designer handle

white
silver anodised
black

Description

- Tensioned system for vertical installation with freely movable top and bottom rails made of aluminium (both 22 x 16.2 mm)
- Horizontal synchronisation of both operating rails
- Variable stacking at top or bottom
- Operated by plastic handles on the operating rails
- The handles are colour-coordinated with the rail
- Velcro and loop tape are used to attach the fabric to the top and bottom rail.
- Blind fabric can be taken down and hand-washed
- **MOUNTING OPTIONS**
 - Drilling:
blinds can be mounted in recess, the wall or architrave
 - Clamp:
blinds can be counted by clamp mount around the window sash on folding doors and windows
 - Adhesive:
blinds can be fastened directly to the glazing
- **FURTHER MOUNTION OPTIONS:**
 - Mounting IN or ON the glazing bead, please ask


Profile colours

White
Anodised silver
Anthracite
Black brown

Plastic colours

White
Grey
Anthracite
Black

Profiles

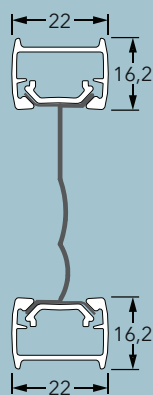

Dimensions

Max. width x height
150 x 150 cm
120 x 220 cm

Min. width x height
23 x 20 cm

F - mounted in recess

STANDARD

**Installation in the recess or glazing bead**

- Fastened at the top and bottom by screwed clamping shoes
- Top rail locked to clamping shoes with magnetic catch (optional magnetic catch on the top rail)

Special features


- The rail profile grips via the clamping shoe and stops flush with the recess or bead

Suitable for


- Plastic windows
- Wooden windows
- Aluminium windows

Not suitable for


- Window bar depth < 19 mm

Installation accessories


Clamping shoe at top and bottom

Accessories for an additional charge

Clamping shoe with magnetic catch at top

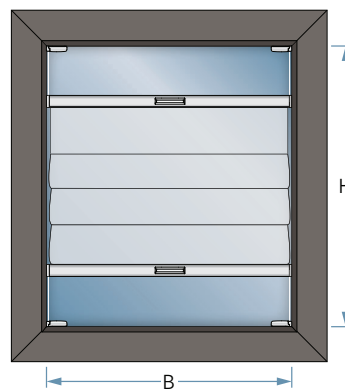
Note about measurements

To establish any dimensional tolerances, measure the width (B) at several points. If these differ, specify the smallest width.



sloping rebate

Order width = B
Order height = H



straight rebate

Order width = B less 5 mm
Order height = H

W - wall bracket

OPTIONAL




Installation on the architrave or wall

- Fastened at the top and bottom by screwed wall brackets with clamping shoes
- Top rail locked to clamping shoes by magnetic catch (optional magnetic catch on the top rail)

Special features


- The rail profile grips at the bottom via the clamping shoe and stops flush with the wall bracket

Installation accessories




Wall bracket with clamping shoe at top and bottom

Accessories for an additional charge



Wall bracket with clamping shoe and magnetic catch at top

Note about measurements

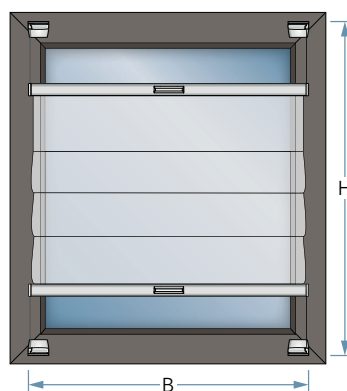

When measuring, watch out for protruding fittings.

Order width:
B incl. desired excess
Order height:
H incl. desired excess*

* Excess at the top and bottom min. 25 mm each
(= height of the wall bracket)

KP - adhesive pad

Additional charge €20.20 per system



Installation on the window bar

- Installation without screws at the top and bottom using clamping shoes with adhesive pads
- Adhesive pads with integrated clamping shoe lower section are stuck to the window bar. The clamping shoe upper sections are fastened to the adhesive pads

Special features

- Adhesive pad can be removed without a trace




Suitable for

- Plastic/UPVC windows only

Not suitable for

- Window bar depth < 19 mm
- Rounded window bar
- Use with magnetic catch


Installation accessories



Adhesive pad (white)


Not available with magnetic catch

Note about measurements

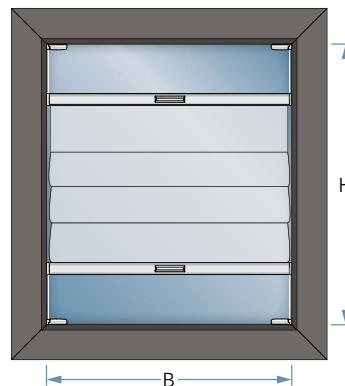


To establish any dimensional tolerances, measure the width (B) at several points. If these differ, specify the smallest width.

When installing with hinged adhesive pad, take the shape and size of the window bar into account.




sloping rebate




straight rebate

Suitable for installation:




sloping rebate




straight rebate

Not suitable for installation:



rounded rebate



rounded rebate

KK - adhesive kit

Additional charge €44.20 per system



Installation on the glass

- Installation without screws using adhesive strips with clamping shoes
- Adhesive strips are stuck to the windowpane. The clamping shoes are pressed onto the adhesive strips
- Top rail locked to clamping shoes with magnetic catch (optional magnetic catch on the top rail)


Special features

- Adhesive strip can be removed without a trace


Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows

Installation accessories




Adhesive kit with adhesive strip (white or grey)



Clamping shoe at top and bottom


Accessories for an additional charge




Clamping shoe with magnetic catch at top

Note about measurements

Measure the width of the seal on all four sides of the pane to identify any dimensional tolerances.



Straight rebate




D up to and including 5 mm

Seal width (D) < 3 mm

inside width (LB) -4 mm
inside height (LH) -10 mm

Seal width (D) 3 - 5 mm

inside width (LB) -4 mm
inside height (LH) -12 mm




D greater than 5 mm

Seal width (D) > 5 mm

inside pane width (LGB) +7 mm
inside pane height (LGH) -2 mm

Sloping rebate




D up to and including 5 mm

Seal width (D) < 3 mm

inside width (LB) -3 mm
inside height (LH) -8 mm

Seal width (D) 3 - 5 mm

inside width (LB) -4 mm
inside height (LH) -12 mm



D greater than 5 mm

Seal width (D) > 5 mm

inside pane width (LGB) +7 mm
inside pane height (LGH) -2 mm



Straight windows

Ceilings