


Rectangular, single/fixed top, handle (model 1600)

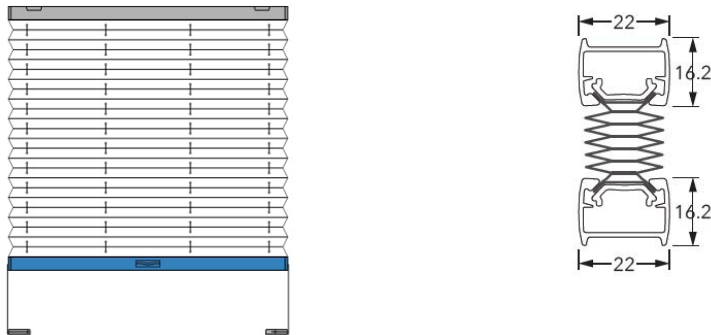

- Design: Tensioned system with handle operation
- Suitability: for vertical rectangular windows
- Mounting: In the glazing bead, on the glazing bead, on the window frame, on the wall
- Slim rail design
- Operation: Via handle on the bottom rail
- Operating option: operating rod (anodised) in various lengths available on request for an additional charge
- Profile colour: white, silver, bronze, or black
- Tensioning: 0.8 mm tension cords colour-matched to the fabric, number depends on system width

This pleated blind allows you to perfectly cover all vertical rectangular windows. It works whether the window is a casement or tilt window, or a non-operable window surface, such as on conservatory glazing. The blind is mounted directly into the glazing bead using clips at the top and tension shoes at the bottom. Alternatively, it can be attached to the window frame using wall brackets or clamp brackets. The bottom rail can be continuously adjusted up or down using the operating handle. For rectangular pleated blinds at greater heights, an additional operating rod is available, which can be easily attached to the operating handle.

- Min. width: 200 mm
- Min. height: 200 mm
- Max. width: 1500 mm
- Max. height: 2500 mm
- Maximum area: 2.6 m²
- Maximum width + height: 3400 mm
- Max. inclination: 15°

