




KADECO®

VENETIAN BLINDS

TECHNOLOGY

VENETIAN BLIND MODELS

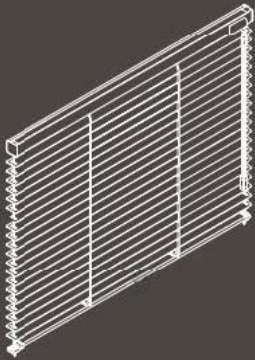


Description		Type	Version	Operation
		16 mm and 25 mm slat width		
		Free-hanging	JC1, JC2 JO1, JO2	ClassicLine OneLine
				Cord/adjustment rod Chain/ motor-driven option



VENETIAN BLINDS

16 mm | 25 mm


FREE-HANGING

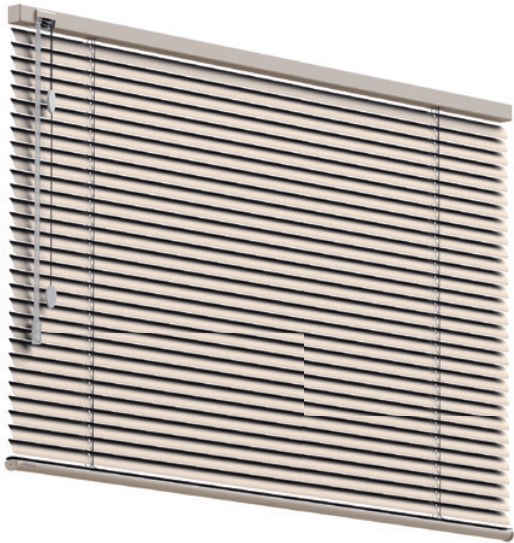

Product description

Type JC1, JC2 ClassicLine

- Free-hanging Venetian blind with fixed upper profile made of steel
- Height of steel lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 16 mm or 25 mm in various colours and finishes
- Attached to the wall, ceiling or casement with quick tensioner
- Upper profile, lower profile, cords and plastic parts are colour-coordinated with the slats
- Opened and closed with pulling cord, slats angled with adjustment rod
- Operating elements can be positioned on the left, the right or both sides
- Anti-swing mechanism available as an option
- Clamp mount available as an option
- Colour change available as an option
- Upper and lower aluminium profiles that are suitable for use in damp rooms available as an option

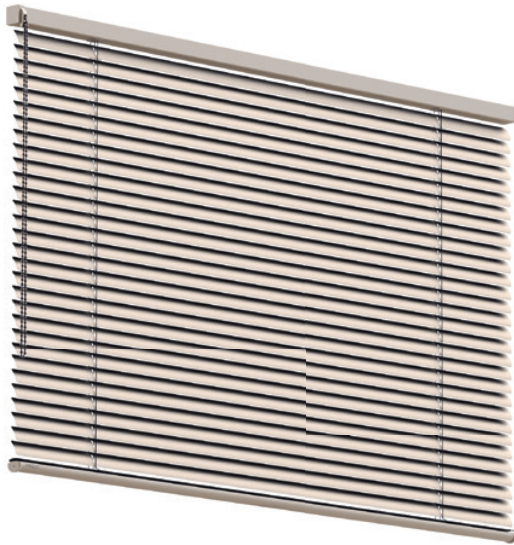

Product description

Type JO1, JO2 OneLine

- Free-hanging Venetian blind with fixed upper profile made of steel
- Height of steel lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 16 mm or 25 mm in various colours and finishes
- Attached to the wall, ceiling or casement with quick tensioner
- Opened, closed and angled with single-element chain pull
- Chain pull can be positioned on either the left or the right
- The chain comes out at the front and is easy to replace
- Gearboxes with a ratio of 1:1 or 3:1
- Upper profile, lower profile, cords and plastic parts are colour-coordinated with the slats
- Anti-swing mechanism available as an option
- Clamp mount available as an option
- Colour change available as an option
- Upper and lower aluminium profiles that are suitable for use in damp rooms available as an option
- Motor-driven options available as JM1/JM2h


16 mm | 25 mm

50 mm

Accessories

FREE-HANGING CLASSICLINE WITH CORD PULL AND ADJUSTMENT ROD

JC1, JC2

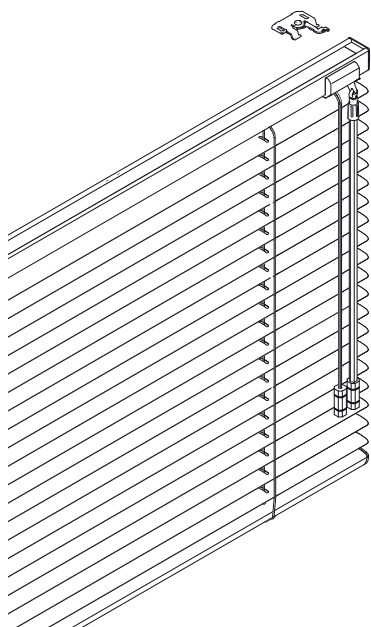

Size ranges

Type JC1 - 16 mm slats

Max. width 270 cm
Max. height 230 cm
Max. area 6 m²

Min. width 32 cm
Min. height 20 cm

Type JC2 - 25 mm slats

Max. width 330 cm
Max. height 300 cm
Max. area 6 m²

Min. width 32 cm
Min. height 20 cm


Table of stack heights

System height in cm	Stack height in cm approx.
	
100	8.5
150	11.0
200	13.5
230	15.0


System height in cm	Stack height in cm approx.
	
100	8.0
150	10.0
200	12.0
250	14.0
300	16.0

Operation (included in the scope of supply)


Please select the type of operation:




Cord pull
left
Adjustment rod
left



Cord pull
left
Adjustment rod
right




Cord pull
right
Adjustment rod
right




Cord pull
right
Adjustment rod
left

Options (option available at additional cost)



Anti-swing mechanism
When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.




Colour change
You can select different slat colours within the same Venetian blind.

FREE-HANGING CLASSICLINE WITH CORD PULL AND ADJUSTMENT ROD


JC1, JC2

Profiles (option available at additional cost)



Upper profile


The upper and lower aluminium profiles that are suitable for use in damp rooms are made of corrosion-resistant aluminium. They are available in colours 10632 and 10076.




Lower profile

Installation accessories (included in the scope of supply)

Please select:




Ceiling mount
for installation **in** the window
rabbet, **on** the ceiling or **in** the
window niche
50000 Zinc-plated



Wall mount
for installation **on** the frame,
on the wall or **in front of** the
window niche
50001 Zinc-plated




Cord winder
Plastic, in 2 parts
08001 Grey
08002 White
08003 Black




**Clamping block for
anti-swing mechanism**
incl. screw and locking ring
43450 Transparent

or




**Wall angle bracket for
anti-swing mechanism**
incl. screw and locking ring
75180 Transparent

Installation accessories (option available at additional cost)



Latching clamp mount
45275 White



**Clamp mount for anti-swing
mechanism**
45126 White

Additional features overview


Latching clamp mount/unit	45275
Clamp mount for anti-swing mechanism/unit	45126
Anti-swing mechanism/system	
Colour change within a Venetian blind	
Damp room suitability	

Venetian blinds less than 60 cm wide and/or less than 80 cm in length are charged at the same price as the minimum width (60 cm) and/or height (80 cm). Prices for oversized products are available on request. Venetian blinds featuring designs are supplied without any pattern repeat. Only covered by the warranty if used in dry rooms.

As KADECO Venetian blinds are made to order, they are non-returnable and non-exchangeable.

FREE-HANGING ONELINE WITH CHAIN PULL AND TURN MECHANISM

JO1, JO2

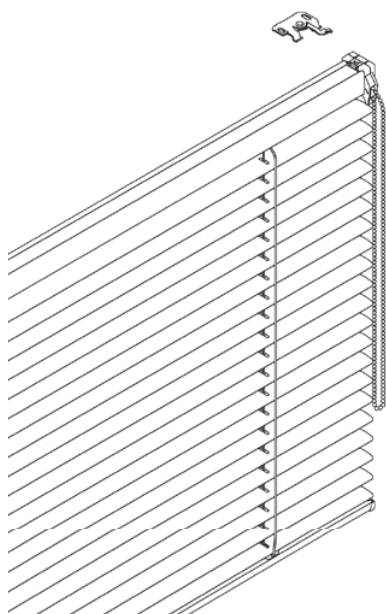

Size ranges

Type JO1 - 16 mm slats

Max. width 270 cm
Max. height 230 cm
Max. area 6 m²

Min. width 32* / 42 cm
Min. height 20 cm
* up to max. height of 180 cm

Type JO2 - 25 mm slats

Max. width 330 cm
Max. height 300 cm
Max. area 6 m²

Min. width 32* / 42 cm
Min. height 20 cm
* up to max. height of 180 cm


Table of stack heights

System height in cm	Stack height in cm approx.
	
100	8.5
150	11.0
200	13.5
230	15.0

System height in cm	Stack height in cm approx.
	
100	8.0
150	10.0
200	12.0
250	14.0
300	16.0


Operation (included in the scope of supply)

Please select the type of operation:




**Single-element operation
with bead chain**
left

or



**Single-element operation
with bead chain**
right

Options (option available at additional cost)



Anti-swing mechanism
When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.




Colour change
You can select different slat colours within the same Venetian blind.

FREE-HANGING ONELINE WITH CHAIN PULL AND TURN MECHANISM


JO1, JO2

Profiles (option available at additional cost)



Upper profile


The upper and lower aluminium profiles that are suitable for use in damp rooms are made of corrosion-resistant aluminium. They are available in colours 10632 and 10076.




Lower profile

Installation accessories (included in the scope of supply)

Please select:



Ceiling mount
for installation **in** the window
rabbet, **on** the ceiling or **in** the
window niche
50000 Zinc-plated



or
Wall mount
for installation **on** the frame,
on the wall or **in front of** the
window niche
50001 Zinc-plated



Chain holder
01255 Acryl, transparent


Included in the scope of supply of the anti-swing mechanism

Please select:




**Clamping block for
anti-swing mechanism**
incl. screw and locking ring
43450 Transparent

or




**Wall angle bracket for
anti-swing mechanism**
incl. screw and locking ring
75180 Transparent

Installation accessories (option available at additional cost)



Latching clamp mount
45275 White



**Clamp mount for anti-swing
mechanism**
45126 White

Motor drives

The models can be supplied as motor-driven options JM1 (with 16 mm slats) or JM2 (with 25 mm slats). The price for the motorised Venetian blinds JM1/JM2 is calculated by adding the extra charge for the motor drive to the basic price of JO1/JO2. Extra charges and further information can be found in our separate motor drive brochures.

16 mm | 25 mm

50 mm

Accessories

Additional features overview

Latching clamp mount/unit	45275
Clamp mount for anti-swing mechanism/unit	45126
Anti-swing mechanism/system	
Colour change within a Venetian blind	
Damp room suitability	
Automation with MOTION/somfy motor drive	

16 mm | 25 mm





50 mm

Accessories

FREE-HANGING VENETIAN BLINDS

NOTE ABOUT MEASUREMENTS

JC1, JC2, JO1, JO2

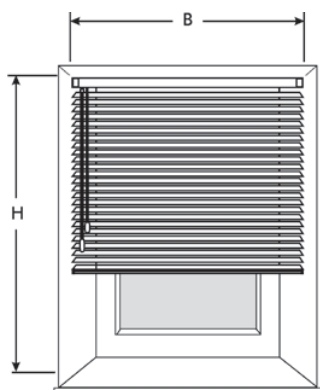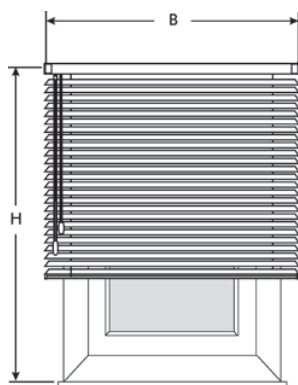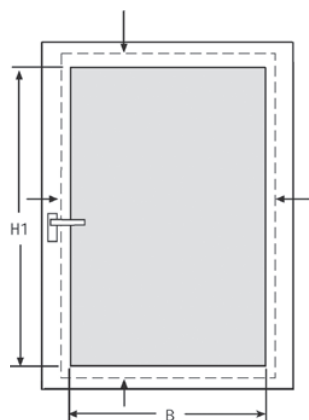

Installation on the casement

Please consider any protruding fittings

B (width) and **H** (height) plus the required excess width and length (x) = order dimension

If using clamp mounts for installation, subtract 10 mm from the height (**H**), or 20 mm if using an anti-swing mechanism.

Installation in front of the window niche

B (width) and **H** (height) = order dimension

Installation in the window niche

B (width) and **H** (height) minus 5 mm = order dimension

Note:


To establish any dimensional tolerances, measure the width **B** at several points.

(**B** = smallest width measured)

FREE-HANGING VENETIAN BLINDS


NOTE ABOUT MEASUREMENTS

JC1, JC2, JO1, JO2




Installation in the window rabbet

B (width) and **H** (height) = order dimension



sloping rabbet

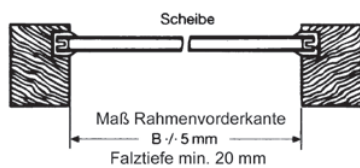


straight rabbet

Note:

To establish any dimensional tolerances, measure the width **B** at several points.

(**B** = smallest width measured)

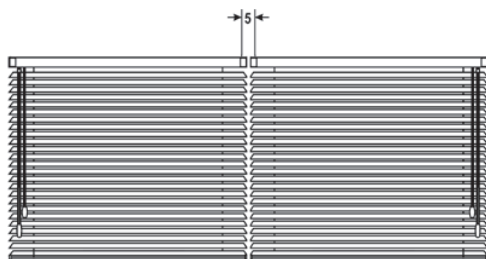

System combinations

Maintain a light gap between the two systems of approx. 5 mm. The gap required between the rails is defined in the factory.

16 mm | 25 mm

50 mm

Accessories