



VENETIAN BLINDS

16 mm | 25 mm

TENSIONED TECHNOLOGY

Product description

Type JF1, JF2 FlicFlac 2.0

- Tensioned Venetian blind with freely movable upper and lower profiles made from aluminium
- Infinitely height adjustable thanks to all-round system bracing
- High degree of flexibility in terms of controlling how much light is let in and using the product as a privacy shield
- Shaped aluminium slats with a width of 16 mm or 25 mm in various colours and finishes
- No free-hanging cords, making the product extremely childproof
- Attached to the glazing bead, recess, wall or architrave. Upper profile, lower profile and plastic parts in white, grey or black are colour-coordinated with the slats
- Cords are colour-coordinated with the slats
- Move the Venetian blind with attractively shaped handles on upper and lower profiles.
- Tilt the slates using the tilt element on the upper handle - optionally also on the lower handle, making changing the slate direction easy even in hard-to-reach places like over the kitchen counter or desk.
- Colour change available as an option
- Installation without screws with the optional adhesive.
- The blinds don't have Ladder cord holes, so they minimize direct sunlight entering the room, making them suitable for bedrooms if total blackout is not required.
- Larger windows can be matched with models in the same profile colour, for a uniform look.
- Damp room suitable for kitchens and bathrooms.



Model: JF1(16mm) JF2(25mm) (FLICFLAC 2.0) top-down & bottom-up operation Tension Cord Blinds for the **tilt and turn** and fixed window

Venetian blinds with surrounding cord tension. Height adjustment by moving the top and bottom operating rails (in both directions). Attractively shaped handle on the upper and lower profiles. The tilt Element is on the upper handle to tilt the slats. An additional optional tilt element on the lower profile can be added, making it easy to control the light in hard-to-reach places, such as over the kitchen counter or desk. The aluminium slats distribute the **natural light** in the room as required, creating the perfect atmosphere for working and relaxing. Fixed windows wider than 1400mm can be matched with models in the same profile colour for a uniform look.

Top-down and bottom-up (TDBU) blinds make great privacy blinds.

Even slightly raised blinds from below can significantly affect what can be seen from street level, below, from across the neighbours, while letting plenty of light into the room from above and providing a clear, uncluttered view to the outside.

Creating a safer, more comfortable living environment.

The Vertical narrow adhesive strip blocks light entering from the side, and the slats do not have ladder cord holes, minimising direct sunlight entering the room, making them suitable for bedrooms if total blackout is not required.

In the field of workplace design, it is the only system that meets all legal requirements for all lighting situations. Without disturbing points of light and with good luminance adjustability, it creates conditions for concentrated work.


Hard-wearing, easy-care, and moisture-resistant – the durability of our aluminium Venetian blinds is convincing, making them a good choice for kitchens and bathrooms. There are attractive surfaces and multifaceted colours to choose from

The top rail is fixed magnetically



TENSIONED FLICFLAC 2.0 WITH HANDLE

JF1, JF2

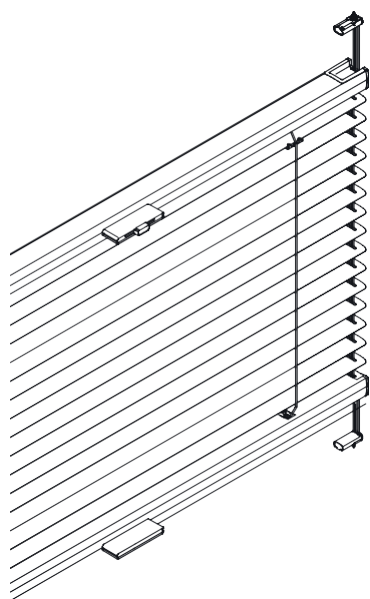

Size ranges

Type JF1 - 16 mm slats

Max. width 142 cm
Max. height 230 cm
Max. area 2 m²

Min. width 32 cm
Min. height 20 cm

Type JF2 - 25 mm slats

Max. width 150 cm
Max. height 250 cm
Max. area 2 m²

Min. width 32 cm
Min. height 40 cm

Table of stack heights

System height in cm	Stack height in cm approx.
------------------------	-------------------------------



100
150
200
230

7.5
10.0
12.5
14.0


System height in cm	Stack height in cm approx.
------------------------	-------------------------------



100
150
200
250

7.0
9.0
11.0
13.0

Profiles (included in the scope of supply)




Upper and lower profile

Upper profile, lower profile, and plastic parts in **white, grey or black** are colour-coordinated with the slats.



Profiles (option available at additional cost)




Adhesive kit

Assembly profiles (16 x 5 mm) made of aluminium with special adhesive tape on the rear side. Available in white (standard), anodised aluminium and black.

Max. height 250 cm

Scope of supply:


- 2 adhesive profiles (with special adhesive tape attached)
- 4 brackets for adhesive profile
- 1 special cleaning cloth for pre-treating the glass



TENSIONED FLICFLAC 2.0 WITH HANDLE


JF1, JF2

Operation (included in the scope of supply)

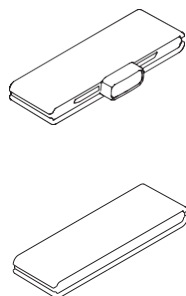

Handle with a tilt element
on the upper profile and a
handle on the lower profile

Operation (option available at additional cost)




Handle with tilt element on
upper and lower profile

Note


This system does not allow perforated slats.
2 handles are provided on each upper and lower profile, starting from a system width of 621 mm (JF1) / 901 mm (JF2).

Options (option available at additional cost)



**Colour change, you can select different slate
colours within the same Venetian blind.**

Choose one of our 12 expressive
LIVING STRIPES patterns that have
already been designed, and you
can create your own.



See some options below, or create your own

Please see the Living stripes PDF for more information

JAPANDI
Seite, P. 10/11



ANTHURIE
Seite, P. 12/13



BOHO CREME
Seite, P. 18/19



BOHO GREY
Seite, P. 18/19



CIELO
Seite, P. 14/15



AURORA
Seite, P. 16/17



GREENERY
Seite, P. 20/21




TERRA
Seite, P. 22/23




TENSIONED VENETIAN BLINDS MOUNTING OPTIONS JF1, JF2


ADHESIVE MOUNT Installation **inside** the glazing bead on the glazing by adhesive strip.

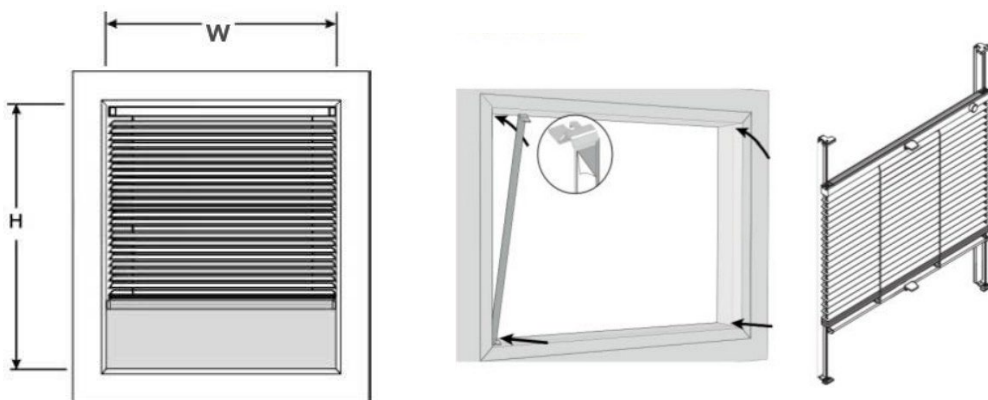

TENSION SHOE MOUNT Installation **inside** the glazing bead, by screw fastening inside the bead

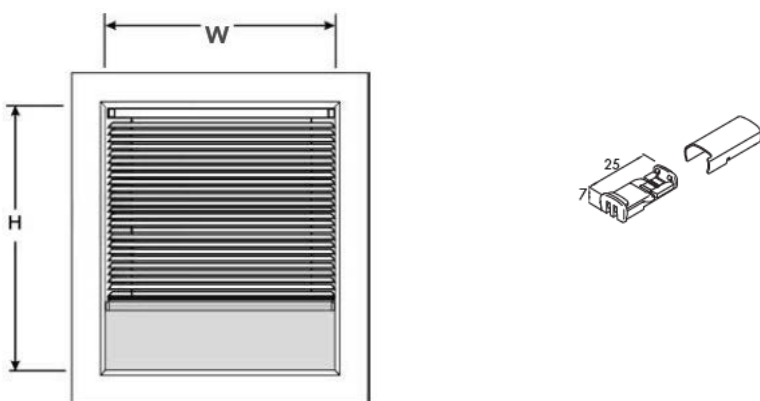

WALL BRACKET MOUNT Installation **on** the casement, by screw fastening onto the bead

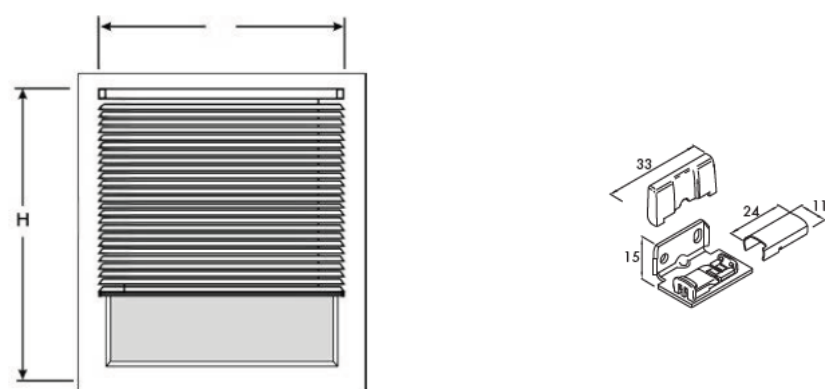

CLAMP MOUNT Installation **outside** the glazing bead, by clamping around the casement/sash

