


FRT13

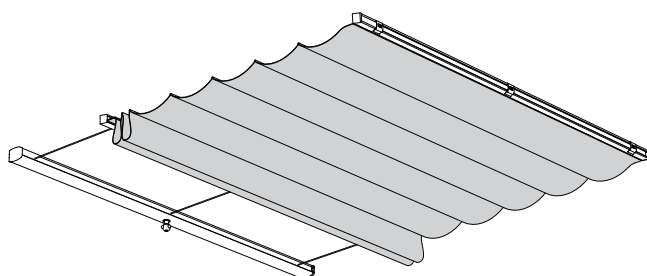

Description

- Tensioned system for sloping or horizontal installations in the ceiling area with fixed top rail (22 x 16.9 mm) and bottom rail (29.4 x 37.8 mm) made of aluminium
- Top and bottom rails fastened with clips
- Operating rail made of aluminium (22 x 16.9 mm)
- The fabric is attached to cross rods that are secured to stable black tensioning wires. Velcro and loop tape are used for the attachment to the top rail and operating rail.
- Stacking on one side
- Operated via a crank handle or an electric rod

Number of bracing wires

System width (mm)	Bracing wires
200	2
300	3
400	3
500	3
600	4
700	4
800	5
900	5
1000	5
1100	6
1200	6
1300	7
1400	7
1500	7

Installation option

Can be installed horizontally or up to a roof pitch of max. 30°.

Please note

We can accept no warranty claims for glass damage sustained once Roman blinds have been installed.


Profile colours

White
Anodised silver
Black brown

Plastic colours

White
Grey
Black

Profiles

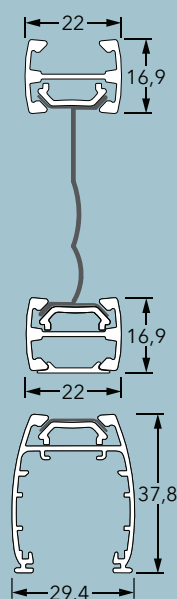

Dimensions

Max. width x height
150 x 350* cm

Min. width x height
20 x 30 cm

* dependent on the fabric used

F - mounted in rebate

STANDARD

Straight windows

Ceilings

Accessories



Installation in the glazing/ window rebate

- Top and bottom rails fastened by screwed clips




Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Not suitable for

- Vertical windows

Installation accessories




Fastening clip




Fastening clip

Note about measurements

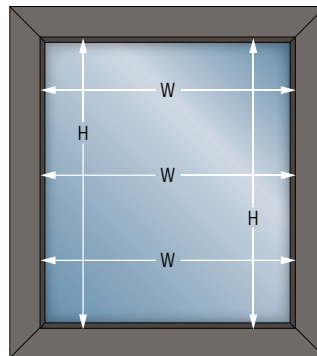

W: Width
H: Height

To establish any dimensional tolerances, measure the width W at several points. If these differ, specify the smallest width.



Min. Keep a gap of 10 cm from the glass and 5 cm at the top and bottom

W - wall bracket

OPTIONAL



Installation on the frame

- Top and bottom rails fastened by screwed wall brackets with clips


Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Not suitable for

- Vertical windows

Installation accessories




Wall bracket top




Wall bracket bottom

Note about measurements

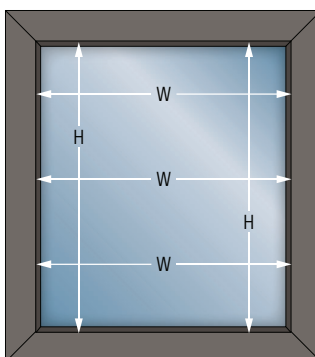

Order width:
W incl. desired excess
Order height:
H incl. desired excess*

* Excess at the top and bottom min. 25 mm each
(= height of the wall bracket)



X = Desired excess length/width

MP - installation profile

Additional charges see page 21



Installation between the rafters

- The installation profile is fixed by screws crosswise between the rafters
- The system is fixed by clips screwed to the installation profile

Special features

- Used when the 10 cm gap from the glass or the 5 cm gap at the top and bottom for air circulation cannot be guaranteed




Suitable for

- Plastic windows
- Wooden windows
- Aluminium windows


Not suitable for

- Vertical windows


Installation accessories




Installation profile
(white, silver anodised, black brown, anthracite)



Angle bracket for installation profile




Support and retaining bolt for installation profile



Clamping kit for installation profile


Note about measurements

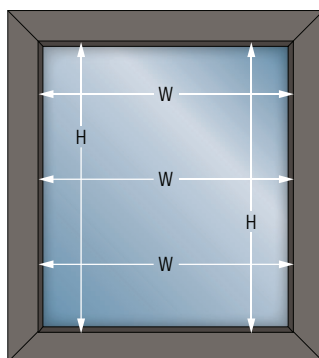

W: Width

H: Height

To establish any dimensional tolerances, measure the width W at several points. If these differ, specify the smallest width.



Min. Keep a gap of 10 cm from the glass and 5 cm at the top and bottom