

A man and a woman are smiling and looking at each other in a modern kitchen. The woman is leaning against a white countertop, and the man is standing next to her. They are both holding coffee cups. In the background, there is a large window with wooden Venetian blinds. The room has a light-colored wooden floor and a blue chair is visible in the foreground.

KADECO®

VENETIAN BLINDS

TECHNOLOGY
FROM 05/26

CHILD-SAFE OPERATION AS PER EN 13120

The European standard EN 13120 stipulates special requirements in respect of the child safety of sunscreens. The aim is to minimise the risk of a small child being strangled by operating chains or cord loops. If a product is fitted with such operating mechanisms, a minimum floor clearance (generally 150 cm) and the use of special safety components are mandatory.

As a responsible manufacturer, we naturally make sure that our products comply with this standard and offer child-safe operating mechanisms for all of our models. When selecting your KADECO sunscreen, please bear in mind any local constraints in respect of child-safe and convenient operation.

Further information is available from the national trade associations (ViS - Association for Interior Sun Protection) and the national standards institute.





SMART HOME STARTS AT THE WINDOW

Our motors can be easily integrated into the Smart Home and intelligently adapted to the daily rhythm or sunlight conditions. The result: a noticeably reduced energy demand for cooling and heating, and greater comfort in your home.

The highlight of the motorisation programme is the Eve Motionblinds motors. They communicate via the energy-efficient wireless protocol "Thread" and support the cross-platform Smart Home standard "Matter". This enables future-proof and manufacturer-independent networking of devices - including Venetian blinds

Subject to technical improvements and modifications without notice; errors and omissions excepted.

MOTORISATION

Motorised sun protection solutions are an important component of modern interior and building concepts - and are therefore increasingly in the focus of specialist retailers.

KADECO offers a comprehensive motorisation programme for almost every application, from wired motors to Smart Home-compatible rechargeable battery motors.

Control is conveniently carried out via wall switch, wireless remote control or app - even when on the go. Compatibility with voice assistants such as Amazon Alexa, Apple Siri or Google Assistant enables effortless operation by voice command.

Motorised sun protection systems work without free-hanging cords and chains, offering a child-safe operating concept.



VENETIAN BLIND MODELS





VENETIAN BLINDS

16 mm | 25 mm

FREE-HANGING, TENSIONED, SPECIAL DESIGNS

wood | designer felt

50 mm

16 mm | 25 mm



Product description

Type JC1, JC2 ClassicLine

- Free-hanging Venetian blind with fixed upper profile made of steel
- Height of steel lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 16 mm or 25 mm in various colours and finishes
- Attached to the wall, ceiling or casement with quick tensioner
- Upper profile, lower profile, cords and plastic parts are colour-coordinated with the slats
- Opened and closed with pulling cord, slats angled with adjustment rod
- Operating elements can be positioned on the left, the right or both sides
- Anti-swing mechanism available as an option
- Clamp mount available as an option
- Colour change available as an option
- Upper and lower profiles suitable for damp rooms available as an option



Product description

Type JO1, JO2 OneLine

- Free-hanging Venetian blind with fixed upper profile made of steel
- Height of steel lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 16 mm or 25 mm in various colours and finishes
- Attached to the wall, ceiling or casement with quick tensioner
- Opened, closed and angled with single-element chain pull
- Chain pull can be positioned on either the left or the right
- The chain comes out at the front and is easy to replace
- Gearboxes with a ratio of 1:1 or 3:1
- Upper profile, lower profile, cords and plastic parts are colour-coordinated with the slats
- Anti-swing mechanism available as an option
- Clamp mount available as an option
- Colour change available as an option
- Upper and lower profiles suitable for damp rooms available as an option
- Motor-driven options available as JM1/JM2h


16 mm | 25 mm

50 mm

wood | designer felt

FREE-HANGING CLASSICLINE WITH CORD PULL AND ADJUSTMENT ROD

JC1, JC2

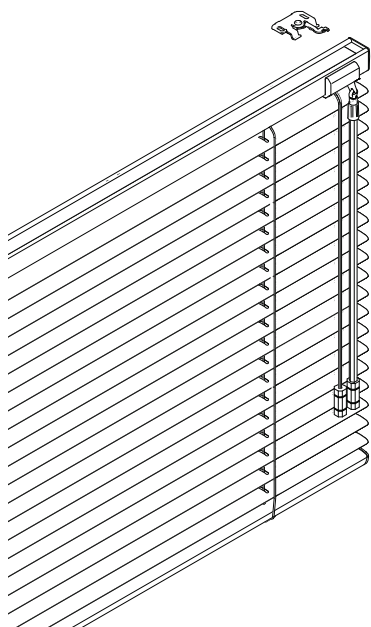

Size ranges

Type JC1 - 16 mm slats

Max. width 270 cm
Max. height 230 cm
Max. area 6 m²

Min. width 32 cm
Min. height 20 cm

Type JC2 - 25 mm slats

Max. width 330 cm
Max. height 300 cm
Max. area 6 m²

Min. width 32 cm
Min. height 20 cm


Table of stack heights

System height in cm	Stack height in cm approx.
	
100	8.5
150	11.0
200	13.5
230	15.0


System height in cm	Stack height in cm approx.
	
100	8.0
150	10.0
200	12.0
250	14.0
300	16.0

Operation (included in the scope of supply)


Please select the type of operation:




Cord pull
left
Adjustment rod
left



Cord pull
left
Adjustment rod
right




Cord pull
right
Adjustment rod
right




Cord pull
right
Adjustment rod
left

Options (available at additional cost)



Anti-swing mechanism
When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.




Colour change
You can select different slat colours within the same Venetian blind.

FREE-HANGING CLASSICLINE WITH CORD PULL AND ADJUSTMENT ROD


JC1, JC2

Profiles (option available at additional cost)



Upper profile

The upper and lower aluminium profiles that are suitable for use in damp rooms are available in colours 10632 and 10076.




Lower profile


16 mm | 25 mm

Installation accessories (included in the scope of supply)

Please select:



Ceiling mount
for installation **in** the window
rabbet, **on** the ceiling or **in** the
window niche
50000 Zinc-plated




Wall mount
for installation **on** the frame,
on the wall or **in front of** the
window niche
50001 Zinc-plated




Cord winder
Plastic, in 2 parts
08001 Grey
08002 White
08003 Black

Included in the scope of supply of the anti-swing mechanism



**Clamping block for
anti-swing mechanism**
incl. screw and locking ring
43450 Transparent


or




**Wall angle bracket for
anti-swing mechanism**
incl. screw and locking ring
75180 Transparent

50 mm

Installation accessories (option available at additional cost)



Latching clamp mount
45275 White
Clamping range 6-21 mm




**Clamp mount for anti-swing
mechanism**
45126 White

wood | designer felt

FREE-HANGING ONELINE WITH CHAIN PULL AND TURN MECHANISM

JO1, JO2

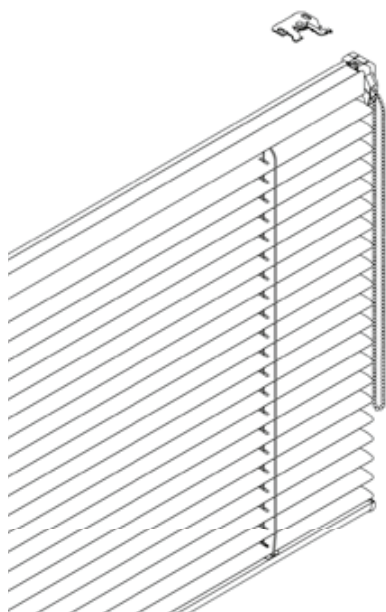

Size ranges

Type JO1 - 16 mm slats

Max. width 270 cm
Max. height 230 cm
Max. area 6 m²

Min. width 32* / 42 cm
Min. height 20 cm
* up to max. height of 180 cm

Type JO2 - 25 mm slats

Max. width 330 cm
Max. height 300 cm
Max. area 6 m²

Min. width 32* / 42 cm
Min. height 20 cm
* up to max. height of 180 cm


Table of stack heights

System height in cm	Stack height in cm approx.
	
100	8.5
150	11.0
200	13.5
230	15.0

System height in cm	Stack height in cm approx.
	
100	8.0
150	10.0
200	12.0
250	14.0
300	16.0


Operation (included in the scope of supply)

Please select the type of operation:




**Single-element operation
with bead chain**
left

or




**Single-element operation
with bead chain**
right


Options (available at additional cost)



Anti-swing mechanism
When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.



Colour change
You can select different slat colours within the same Venetian blind.




Metal bead chain

FREE-HANGING ONELINE WITH CHAIN PULL AND TURN MECHANISM


JO1, JO2

Profiles (option available at additional cost)



Upper profile


The upper and lower aluminium profiles that are suitable for use in damp rooms are available in colours 10632 and 10076.




Lower profile

Installation accessories (included in the scope of supply)

Please select:



Ceiling mount
for installation **in** the window
rabbet, **on** the ceiling or **in** the
window niche
50000 Zinc-plated



Wall mount
for installation **on** the frame,
on the wall or **in front of** the
window niche
50001 Zinc-plated




Chain holder
01255 Acryl, transparent

Included in the scope of supply of the anti-swing mechanism




**Clamping block for
anti-swing mechanism**
incl. screw and locking ring
43450 Transparent

or




**Wall angle bracket for
anti-swing mechanism**
incl. screw and locking ring
75180 Transparent

Installation accessories (option available at additional cost)



Latching clamp mount
45275 White
Clamping range 6-21 mm



**Clamp mount for anti-swing
mechanism**
45126 White

Motor drives

The models can be supplied as motor-driven options M-JM1 (with 16 mm slats) or M-JM2 (with 25 mm slats). The price for the motorised Venetian blinds M-JM1/JM2 is calculated by adding the extra charge for the motor drive to the basic price of JO1/JO2. Extra charges and further information can be found in our separate motor drive brochures.

16 mm | 25 mm


50 mm

wood | designer felt

FREE-HANGING VENETIAN BLINDS

NOTE ABOUT MEASUREMENTS

JC1, JC2, JO1, JO2





Installation on the casement

Please consider any protruding fittings.


B (width) and **H** (height) plus the required excess width and length (x) = order dimension

If using clamp mounts for installation, subtract 10 mm from the height (**H**), or 20 mm if using an anti-swing mechanism.

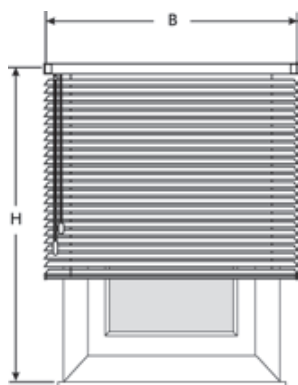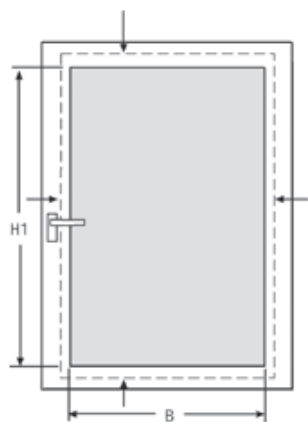

Installation in front of the window niche

B (width) and **H** (height) = order dimension

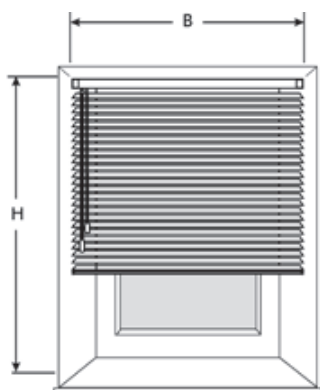

Installation in the window niche

B (width) and **H** (height) minus 5 mm = order dimension

Note:


To establish any dimensional tolerances, measure the width **B** at several points.

(**B** = smallest width measured)

FREE-HANGING VENETIAN BLINDS


NOTE ABOUT MEASUREMENTS

JC1, JC2, JO1, JO2




Installation in the window rabbet

B (width) and **H** (height) = order dimension




sloping rabbet

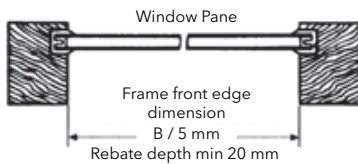

straight rabbet

Note:

To establish any dimensional tolerances, measure the width **B** at several points.
(**B** = smallest width measured)

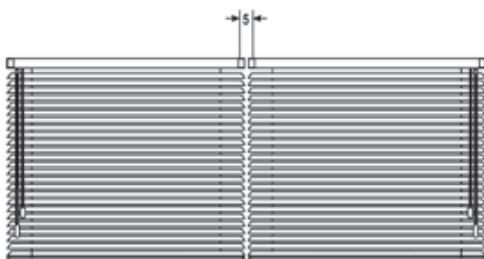


System combinations

Maintain a light gap between the two systems of approx. 5 mm. The gap required between the rails is defined in the factory.

16 mm | 25 mm

50 mm

wood | designer felt

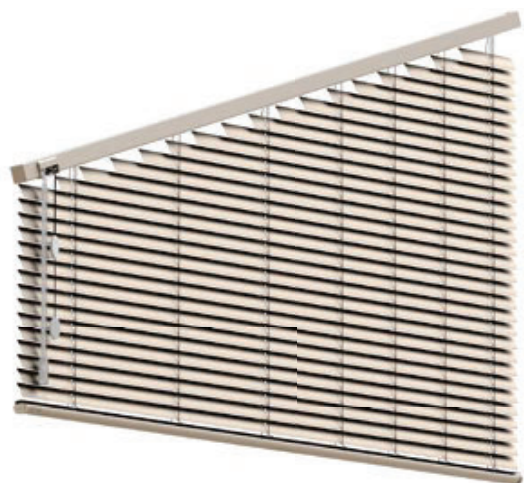**Product description****Type JCS20-JCS22**


- Free-hanging Venetian blind with fixed upper profile made of steel
- Height of steel lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 25 mm in various colours and finishes
- Attached to the wall, ceiling or casement with quick tensioner
- Upper profile, lower profile, cords and plastic parts are colour-coordinated with the slats
- Opened and closed with pulling cord, slats angled with adjustment rod
- Operating elements are always positioned on the same side (the one with the lowest height)
- Anti-swing mechanism available as an option
- Colour change available as an option
- Upper and lower profiles suitable for damp rooms available as an option

SPECIAL DESIGNS WITH CORD PULL AND ADJUSTMENT ROD


JCS20, JCS21, JCS22

Product description


JCS20



JCS21



JCS22



For dimensioning details, see note about measurements for special designs

Price basis, width = basic width

Price basis, height = maximum height

The slats can be fully angled on all systems, but there are restrictions on how far the blinds can be raised.

Note

The sketches show an internal view of the Venetian blinds. Please always enclose a sketch with details of all width and height measurements. Specify all measurements without any deductions. If the product is going to be installed on the frame, specify the required excess width and length.


Other special designs on request.

SPECIAL DESIGNS

WITH CORD PULL AND ADJUSTMENT ROD


JCS20, JCS21, JCS22

Operation (included in the scope of supply)




Cord pull/adjustment rod
The cord pull and adjustment rod are always located on the lowest side.

Options (option available at additional cost)




Anti-swing mechanism (JCS20 only)
When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.




Colour change
You can select different slat colours within the same Venetian blind.

Profiles (option available at additional cost)



Upper profile


The upper and lower aluminium profiles that are suitable for use in damp rooms are available in colours 10632 and 10076.



Lower profile


Installation accessories (included in the scope of supply)

Please select:



Ceiling mount
for installation **in** the window rabbet, **on** the ceiling or **in** the window niche
50000 Zinc-plated

or



Wall mount
for installation **on** the frame, **on** the wall or **in front of** the window niche
50001 Zinc-plated


Included in the scope of supply of the anti-swing mechanism

Please select:



Clamping block for anti-swing mechanism
incl. screw and locking ring
43450 Transparent

or



Wall angle bracket for anti-swing mechanism
incl. screw and locking ring
75180 Transparent

16 mm | 25 mm

50 mm

wood | designer felt

SPECIAL DESIGNS

NOTE ABOUT MEASUREMENTS

JCS20, JCS21, JCS22

Note about measurements

JCS20

Can be raised as far as the lower height (H1) allows Operating elements always on side with lowest height (H1)

Angle of slope:

$\alpha : 5^\circ - 45^\circ$


B : max. 200 cm

C : min. 38.5 cm

B : min. 30 cm

H : max. 250 cm

Max. area 4 m²

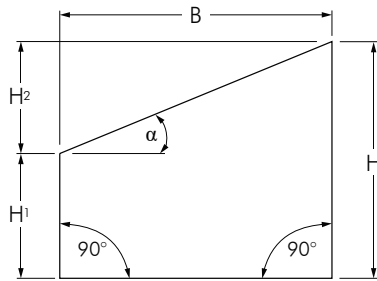

JCS21


B : max. 200 cm

B1 : min. 30 cm

B2 : max. 20 cm

H : max. 250 cm

Max. area 4 m²



JCS22

B : max. 200 cm

B1 : min. 30 cm

B2 : max. 20 cm

H : max. 250 cm

Max. area 4 m²

