


ROLLER BLINDS TECHNOLOGY

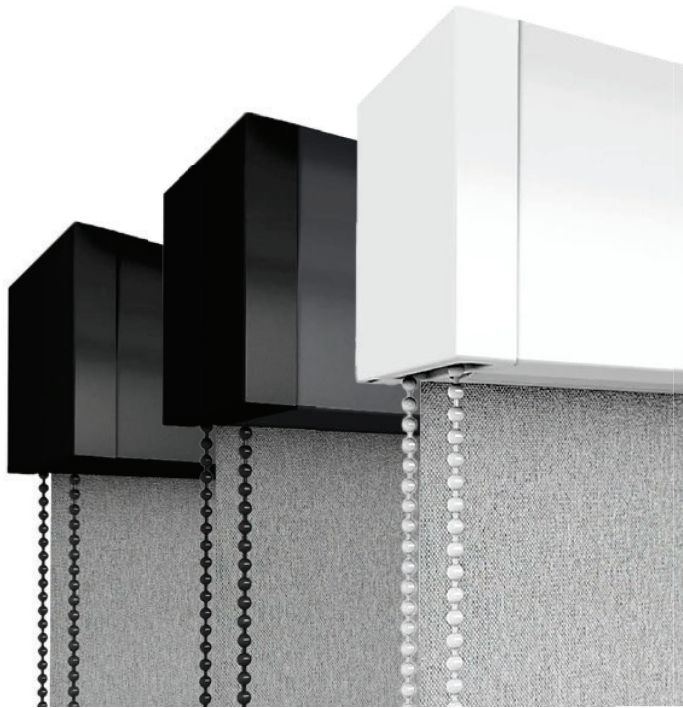

CASSETTE ROLLER BLINDS

Cassettes and components are available in the colours white, anthracite and black with a finely textured surface.

Cassette roller blinds with a MOTIONBLINDS Lito Motor use an integrated charging socket in the side panel. The cassette is conveniently attached to the wall or ceiling using a clip.



Somfy




MOTIONBLINDS

*more
information*

DESIGN CASSETTE ROLLER BLIND

Our exclusive DKE65 design cassette roller blind is distinguished by its rounded shape. It is available in the colours white, black and dark grey, each in silk matt, as well as in anodised E6/EV1. Coloured decorative rings in white, black, grey, red or green can be used to create individual accents.

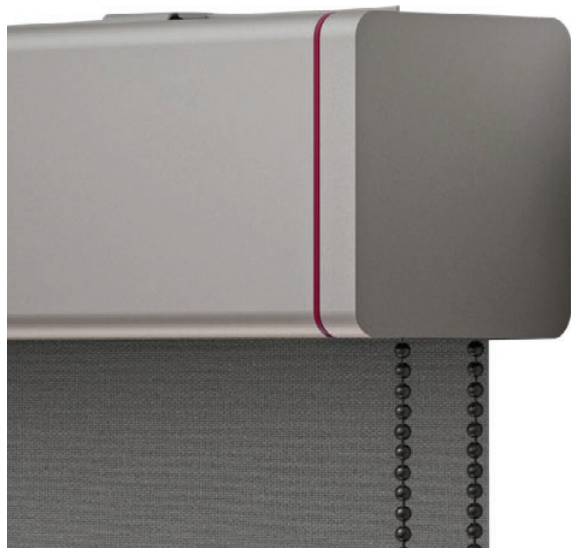


CHILD-SAFE OPERATION ACCORDING TO EN 13120

European standard EN 13120 specifies special requirements in respect of the child safety of internal blinds. The aim is to minimise the risk of a small child being strangled by operating chains or cord loops. If a product is fitted with such operating mechanisms, a minimum floor clearance (generally 150 cm) and the use of special safety components are mandatory.

As a responsible manufacturer, we naturally make sure that our products comply with this standard and offer child-safe operating mechanisms for all of our models. When selecting your KADECO sun protection product, please bear in mind any local constraints in respect of child-safe and user-friendly operation.

Further information is available at www.kadeco.de, from your local industry association (e.g. in Germany: ViS - Verband innenliegender Sonnenschutz) or your national standards body.



Description	Type	Design	Page
	Cassette roller blinds	SKM Mini-cassette SKR65 Cassette, round SKE65 Cassette, square SKR85 Cassette, round SKE85 Cassette, square DKE65 Designer cassette	



CASSETTE ROLLER BLINDS

Roller blinds

Cassette roller blinds


Recess cassettes

Rooflight roller blinds

CASSETTE ROLLER BLINDS SKR65 / SKE65, SKR85 / SKE85, DKE65

Product description

SKR65 / SKE65

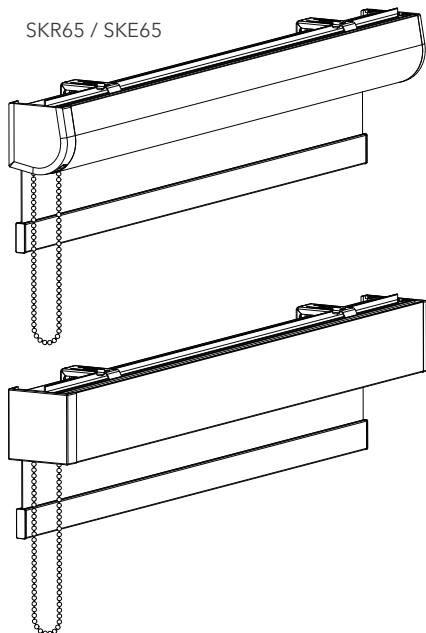


SKR/SKE general information

- Two-part cassette profile made of extruded aluminium
- No visible fastening screws thanks to concealed mounting clip on the wall or ceiling
- Cassette profile available in the colours white microstructure, anthracite microstructure and black microstructure
- Side panels, end caps, operating chain and gear available in white, grey and black
- Can be used as a darkening roller blind
- Two roller blind tubes can be coupled for operation on one (motorised) or both sides (chain pull)
- Options: Metal bead chain, various bottom end types, anti-swing mechanism
- Optional secure side guides made of extruded aluminium (not in combination with fabric covering) in the dimensions 19 x 40 mm or 20 x 45 mm, suitable for wall and niche mounting
- Optional brush seals in the cassette profile and side guide for use as a darkening roller blind
- Cassettes also available in special RAL (optional for an additional charge)

SKR65 / SKE65

- Maximum width: 180 cm
- Maximum height: 260 cm


SKR85 / SKE85

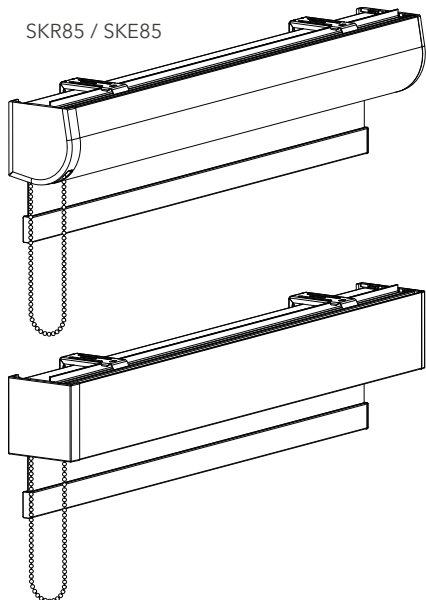

SKR85 / SKE85

- Maximum width: 320 cm
- Maximum height: 340 cm


DKE65

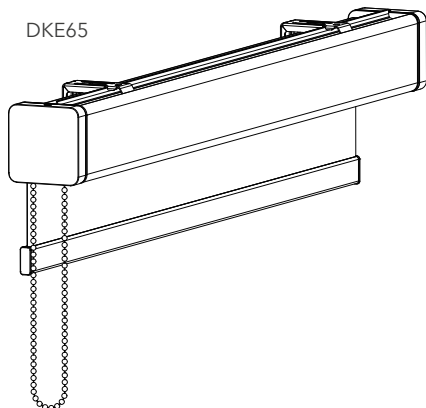



DKE65

- Two-part cassette profile made of extruded aluminium
- No visible fastening screws thanks to concealed mounting clip on the wall or ceiling
- Maximum width: 180 cm
- Maximum height: 260 cm
- Cassette profiles available in the colours white silk matte, anthracite silk matte, black silk matte and anodised aluminium
- Plastic operating chain available in white, grey and black
- Accent stripes freely selectable in white, grey, black, red and dark green
- Options: Metal bead chain, various bottom end types

SKR65

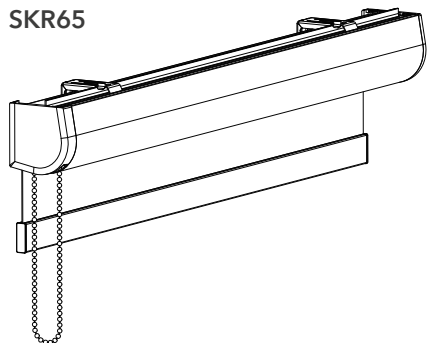

SKE65

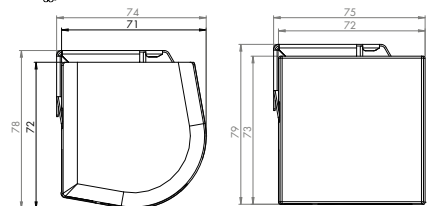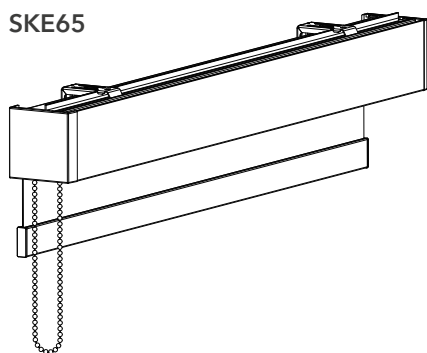

Size ranges, dimensions, materials

SKR65 / SKE65
with motor drive

max. width	max. height
180 cm	260 cm
200 cm	160 cm

Restrictions

Combined systems up to max. 360 cm width

Blind rod

made of extruded aluminium

Ø 30 mm

Ø 44 mm for motorisation

Ordering/Price calculation

Fabric width = Outer dimension less 38 mm

Outer dimension = Order width and price width


Please observe the size restrictions for each roller blind fabric.

You will find more information in our product overview.

Clips

up to width	80 cm	130 cm	180 cm
No.	2	3	4

Cassette and Bottom End Colours



White
microstructure




Anthracite
microstructure



Black
microstructure

Component colours



White




Black




Black

Bottom end (included)




Profile, "square" (standard)
Profile, 30 x 10 mm




Seam
Seam height 35 mm
with incorporated weighting rod

Bottom end profile (optional for an additional charge)




Fabric covered
Profile, 30 x 15 mm fabric covered
(Ordering width max. 180 cm)



Seam ACS
Seam height 50 mm with internal
weighting profile

Operation (included)

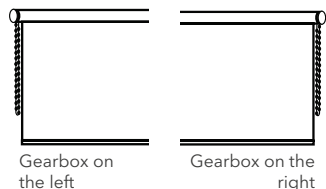

Manual
with 1:1 chain pull


Please specify the operating side.

Operation (optional for an additional charge)

Motorised Roller Blinds


Further information on motor drives can be found in our separate motor drive brochures.

Options (for an additional charge)



Anti-swing mechanism


Tensioning a wire on both sides stops the drape from swinging. Only suitable for combined systems.



Combined roller blinds


A centre support can be used to combine two roller blinds with a light gap of just 20 mm between the lengths of fabric.

Operation is either manual or independently with two chain drives




Side guide with U profile

with "square" or "seam", can also be retrofitted. One-piece profile for direct screwing onto the wall.




Metal bead chain




Side guide with V profile

Only with 'square' bottom end profile, brushes in the side profile and on the top or back of the cassette. One-piece profile for direct screw connection to the mounting surface. For better darkening, we recommend combining with model SKE.




Installation accessories (optional for an additional charge)




"Ceiling/wall" fastening clip

B01340 White
B01341 Black



Set of clamping shoes for anti-swing mechanism

B43450 transparent (included in the scope of supply of the anti-swing mechanism)



Wall angle bracket for anti-swing mechanism

B75180 Transparent

Please note

Cassette roller blinds with side guides may only be lowered in closed rooms (draught-free rooms). Damage caused by strong air movements from tilted windows does not constitute grounds for complaint.

You can find the motorisation brochures here.




Somfy





MOTIONBLINDS

SKR85

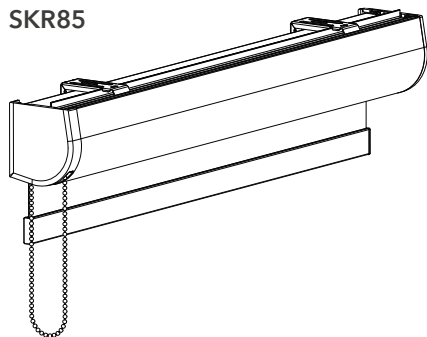

SKE85

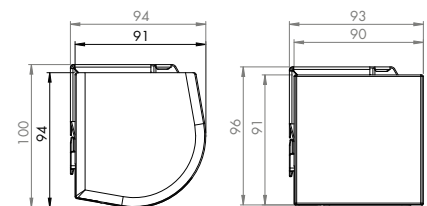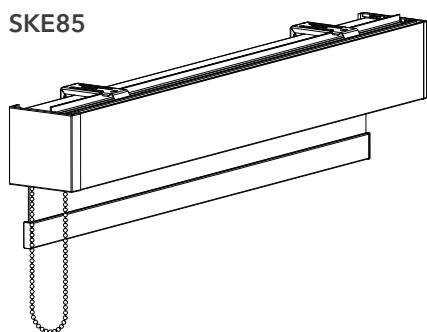

Size ranges, dimensions, materials

SKR85 / SKE85
(also with motor drive)max. width
320 cmmax. height
340 cm

Restrictions

Combined systems up to max. 490 cm width

Blind rod

Extruded aluminium

Ø 44 mm to 250 cm width

Ø 48 mm from 251 cm width

Ordering/Price calculation

Fabric width = Outer dimension less 39 mm

Outer dimension = Order width and price width

Please observe the size restrictions for each roller blind fabric.

You will find more information in our product overview.

Clips

up to width	80 cm	130 cm	180 cm	230 cm	280 cm
No.	2	3	4	5	6

Bottom end colour

White
microstructureAnthracite
microstructureBlack
microstructure

Component colours



White




Black




Black

Bottom end (included)



Profile, "square" (standard)


Profile, 30 x 10 mm




Seam

Seam height 35 mm
with incorporated weighting rod

Bottom end profile (optional for an additional charge)




Fabric covered

Profile, 30 x 15 mm fabric covered
(Ordering width max. 180 cm)

Seam ACS

Seam height 50 mm with internal
weighting profile

Operation (included)

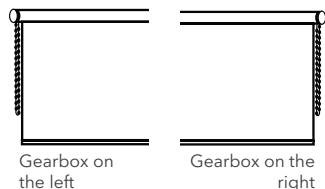

Manual
with 1:1 chain pull
optionally with
reduced gear 1:3*

Please specify the
operating side.


* Use of chain stoppers not possible

Operation (optional for an additional charge)

Motorised Roller Blinds


Further information on motor drives can be found in our separate motor drive brochures.

Options (for an additional charge)




Anti-swing mechanism

Tensioning a wire on both sides stops the drape from swinging. Only suitable for combined systems.




Side guide with U profile

with "square" or "seam", can also be retrofitted. One-piece profile for direct screwing onto the wall.




Side guide with V profile

Only with 'square' bottom end profile, brushes in the side profile and on the top or back of the cassette. One-piece profile for direct screw connection to the mounting surface. For better darkening, we recommend combining with model SKE.



Metal bead chain




Combined roller blinds

A centre support can be used to combine two roller blinds with a light gap of just 20 mm between the lengths of fabric.

Operation either manual and independent with the aid of two chain drives, or synchronously with the aid of a motor that drives both rods.

Motor drive is only possible if both roller blinds are the same height and the same fabric!

Installation accessories (optional for an additional charge)




"Wall/ceiling" fastening clip

B01343 White
B01344 Black



Set of clamping shoes for anti-swing mechanism

B43450 transparent (included in the scope of supply of the anti-swing mechanism)



Wall angle bracket for anti-swing mechanism

B75180 Transparent

Please note

Cassette roller blinds with side guides may only be lowered in closed rooms (draught-free rooms). Damage caused by strong air movements from tilted windows does not constitute grounds for complaint.



You can find the motorisation brochures here.



Somfy



MOTIONBLINDS

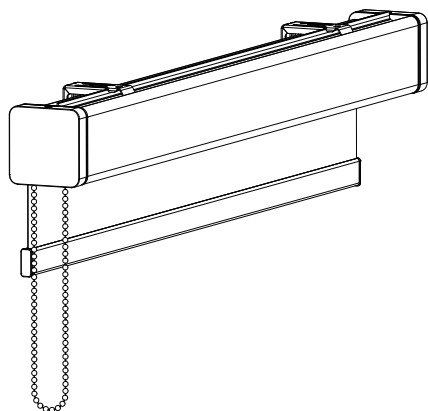

Size ranges, dimensions, materials

	max. width	max. height
DKE65	180 cm	260 cm
with motor drive	200 cm	160 cm

Blind rod

made of extruded aluminium
 Ø 30 mm
 Ø 44 mm for motorisation

Ordering/Price calculation

Fabric width = Outer dimension less 46 mm

Outer dimension = Order width and price width

Clips

up to width	80 cm	130 cm	200 cm
No.	2	3	4

Cassette and Bottom End Colours

White silk matte	Dark grey silk matte	Black silk matte	Anodised aluminium


Component colours

White	Black	Black	Grey


Accent colours freely selectable in

White	Grey	Black	Red
Dark green			

Bottom end (included)




Profile, "square" (standard)
 Profile, 24 x 10 mm




Seam
 Seam height 35 mm
 with incorporated weighting rod

Bottom end profile (optional for an additional charge)




Fabric covered
 Profile, 30 x 15 mm fabric covered
 (Ordering width max. 180 cm)



Seam ACS
 Seam height 50 mm with internal
 weighting profile

Operation (included)

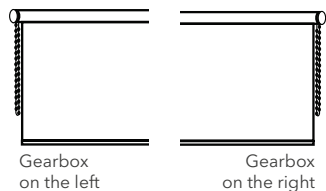

Manual
with 1:1 chain pull


Please specify the
operating side.

Operation (optional for an additional charge)

Motorised Roller Blinds


Further information on motor drives can be found in
our separate motor drive brochures.

Options (for an additional charge)



Metal bead chain

Installation accessories (optional for an additional charge)



"Ceiling/wall" fastening clip

B01339 grey
B01340 White
B01341 Black

You can find the
motorisation
brochures here.




Somfy



MOTIONBLINDS

CASSETTE ROLLER BLINDS SKR65 / SKE65 , SKR85 / SKE85, DKE65


MEASURING TIPS

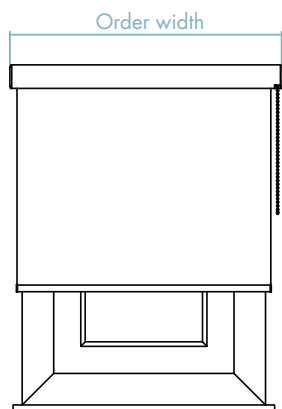

Installation in front of the window niche

For SKR / SKE / DKE


Order width = Outer dimension = Price width

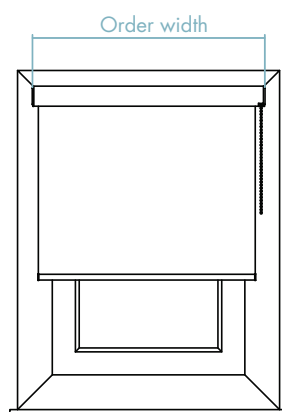

Installation in the window niche

For SKR / SKE / DKE

Order width = Niche dimension less 5 mm =
Outer dimension = Price width

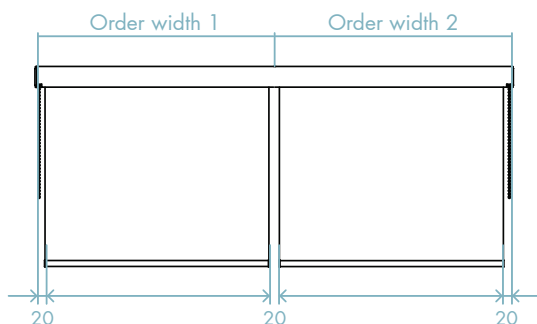

Combined cassette roller blinds

For all SKR / SKE

Order width 1 + Order width 2
= Outer dimension
Price width 1 + Price width 2 + Coupling
= Total Price
Light gap: 20 mm

