



KADECO®

VENETIAN BLINDS

TECHNOLOGY
FROM 05/26

CHILD-SAFE OPERATION AS PER EN 13120

The European standard EN 13120 stipulates special requirements in respect of the child safety of sunscreens. The aim is to minimise the risk of a small child being strangled by operating chains or cord loops. If a product is fitted with such operating mechanisms, a minimum floor clearance (generally 150 cm) and the use of special safety components are mandatory.

As a responsible manufacturer, we naturally make sure that our products comply with this standard and offer child-safe operating mechanisms for all of our models. When selecting your KADECO sunscreen, please bear in mind any local constraints in respect of child-safe and convenient operation.

Further information is available from the national trade associations (ViS - Association for Interior Sun Protection) and the national standards institute.





SMART HOME STARTS AT THE WINDOW

Our motors can be easily integrated into the Smart Home and intelligently adapted to the daily rhythm or sunlight conditions. The result: a noticeably reduced energy demand for cooling and heating, and greater comfort in your home.

The highlight of the motorisation programme is the Eve Motionblinds motors. They communicate via the energy-efficient wireless protocol "Thread" and support the cross-platform Smart Home standard "Matter". This enables future-proof and manufacturer-independent networking of devices - including Venetian blinds

Subject to technical improvements and modifications without notice; errors and omissions excepted.

MOTORISATION

Motorised sun protection solutions are an important component of modern interior and building concepts - and are therefore increasingly in the focus of specialist retailers.

KADECO offers a comprehensive motorisation programme for almost every application, from wired motors to Smart Home-compatible rechargeable battery motors.

Control is conveniently carried out via wall switch, wireless remote control or app - even when on the go. Compatibility with voice assistants such as Amazon Alexa, Apple Siri or Google Assistant enables effortless operation by voice command.

Motorised sun protection systems work without free-hanging cords and chains, offering a child-safe operating concept.





VENETIAN BLINDS

50 mm

FREE-HANGING

16 mm | 25 mm

50 mm

wood | designer felt



Product description

Type JS5 ClassicLine

- Free-hanging Venetian blind with fixed upper profile made of aluminium
- Height of aluminium lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 50 mm in various colours and finishes
- Attached by means of wall and ceiling mount
- Upper profile, lower profile and plastic parts in white, grey or black, each with a colour-coordinated slat inserted
- Cords are colour-coordinated with the slats
- Opened and closed with pulling cord, slats tilted with tilt cord, optionally with adjustment rod or motor drive
- Operating elements can be positioned on the left, the right or both sides
- Anti-swing mechanism available as an option
- Fabric ladder tape available as an option
- Optional Panorama for better view to the outside
- Optional motorization "Tilt Only" which turns the slats



Product description

Type JK5 ClassicLine

- Free-hanging Venetian blind with fixed upper profile made of aluminium
- Height of aluminium lower profile is infinitely adjustable
- Shaped aluminium slats with a width of 50 mm in various colours and finishes
- Attached by means of wall and ceiling mount
- Upper profile, lower profile and plastic parts in white, grey or black, each with a colour-coordinated slat inserted
- Cords are colour-coordinated with the slats
- Slats opened, closed and tilted with a plastic chain
- Operating chain positioned on either the right or the left, crank mechanism available as an option
- Anti-swing mechanism available as an option
- Fabric ladder tape available as an option
- Motor-driven option available as M-JM5


16 mm | 25 mm

50 mm

wood | designer felt

FREE-HANGING CLASSICLINE WITH CORD PULL AND CORD TILT

JS5

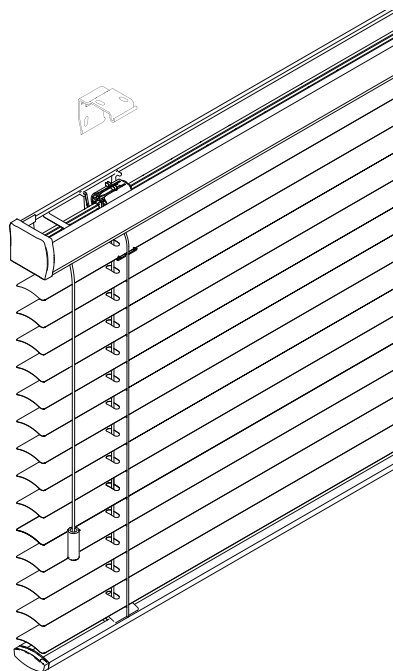

Size ranges

Type JS5 - 50 mm slats

Max. width 450 cm
Max. height 350 cm
Max. area 10 m²


Min. width 35 cm*
Min. height 40 cm

* up to width 50 cm only available
with right/left operation

Table of stack heights


System height in cm	Stack height in cm Ladder cord approx.	Stack height in cm Ladder tape approx.
100	11.0	13.0
150	12.0	16.0
200	13.0	18.0
250	15.0	21.0
300	16.0	23.0
350	17.0	26.0

Profiles (included in the scope of supply)



Upper profile


Please select the colour of the upper and lower profile:
White, Silver or Black



Lower profile


Operation (included in the scope of supply)

Please select the type of operation you require:



Cord pull/cord tilt (standard)


The Venetian blind is opened and closed using a pulling cord, the slats are tilted with a tilt cord.




Adjustment rod (optional)

The Venetian blind is opened and closed using a pulling cord, the slats are tilted with an aluminium adjustment rod.


Please select the operating sides:




Cord pull
left
Tilt system
left



Cord pull
right
Tilt system
right



Cord pull
left
Tilt system
right




Cord pull
right
Tilt system
left

FREE-HANGING CLASSICLINE WITH CORD PULL AND CORD TILT

JS5

Options (available at additional cost)




Anti-swing mechanism

When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.



Ladder tape


Use textile ladder tape to create a bespoke Venetian blind design. Use our ladder tape planner to coordinate the slats with the ladder tape. Please note that the stack heights differ when ladder tape is used.



Panorama

Allows a better view to the outside because slats always lay on top of each other in pairs when tilted. With 50 mm slats, this results in a 100 mm view to the outside. Cannot be combined with ladder tape.

Installation accessories (included in the scope of supply)



Wall/ceiling mount


for installation
- under the ceiling
- in the window niche
- on the wall
- in front of the window niche
50007 Anodised
50006 White
50012 Black



Metal cord winder

metal
for wall mounting
08004 White

Included in the scope of supply of the anti-swing mechanism



Wall angle bracket for anti-swing mechanism

incl. screw and locking ring
75180 Transparent

Motor drives

Tilt-Only

Slats can also be tilted by motor drive. Information can be found in our separate MOTIONBLINDS motor drive brochure.


16 mm | 25 mm

50 mm

wood | designer felt

FREE-HANGING CLASSICLINE WITH CHAIN PULL AND TURN MECHANISM

JK5

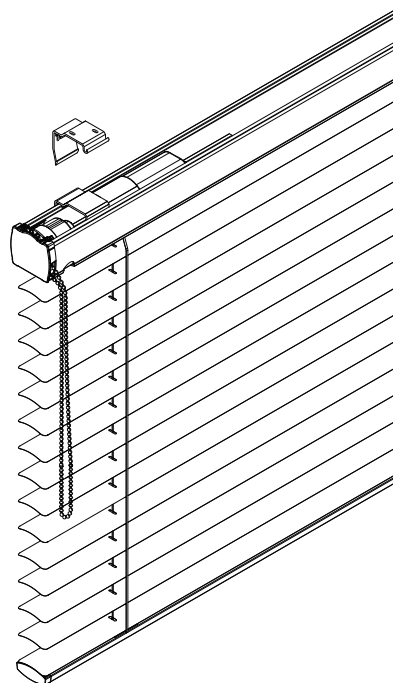

Size ranges

Type JK5 - 50 mm slats

Max. width 450 cm
Max. height 350 cm*
Max. area 10 m²**

Min. width 46 cm***
Min. height 40 cm

* motorised up to 400 cm


** motorised up to 14 m²

*** with crank operation
min. width 60 cm

Table of stack heights


System height in cm	Stack height in cm Ladder cord approx.	Stack height in cm Ladder tape approx.
		
100	11.0	13.0
150	12.0	16.0
200	13.0	18.0
250	15.0	21.0
300	16.0	23.0
350	17.0	26.0

Profiles (included in the scope of supply)



Upper profile


Please select the colour of the upper and lower profile:
White, Silver or Black




Lower profile

Operation (included in the scope of supply)

Please select the type of operation:



Chain pull and turn
mechanism
left




Chain pull and turn
mechanism
right

FREE-HANGING CLASSICLINE WITH CHAIN PULL AND TURN MECHANISM


JK5

Options (available at additional cost)



Anti-swing mechanism

When the Venetian blind is installed on the casement, the bracing wire on both sides prevents it from swinging.



Crank mechanism


The blind is operated (opened, closed, turned) with a removable articulated crank made from aluminium installed on the right or left. The model has no free-hanging cords, making it extremely childproof.



Ladder tape

Use textile ladder tape to create a bespoke Venetian blind design. Use our ladder tape planner to coordinate the slats with the ladder tape. Please note that the stack heights differ when ladder tape is used.

Installation accessories (included in the scope of supply)



Wall/ceiling mount


for installation
- under the ceiling
- in the window niche
- on the wall
- in front of the window niche
50007 Anodised
50006 White
50012 Black



Chain holder


01255 Acryl, transparent

Included in the scope of supply of the anti-swing mechanism



Wall angle bracket for anti-swing mechanism

incl. screw and locking ring
75180 Transparent



Metal bead chain

Up to max. 6 m²

Motor drives

This model can be supplied as a motor-driven option. The price for the motorised Venetian blinds M-JM5 is calculated by adding the extra charge for the motor drive to the basic price of M-JK5. Extra charges and further information can be found in our separate motor drive brochures.

16 mm | 25 mm


50 mm

wood | designer felt

FREE-HANGING VENETIAN BLINDS


NOTE ABOUT MEASUREMENTS

JS5, JK5

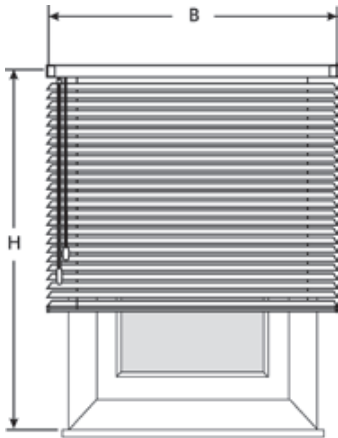

Installation in front of the window niche

B (width) and **H** (height) plus the required excess width and length = order dimension

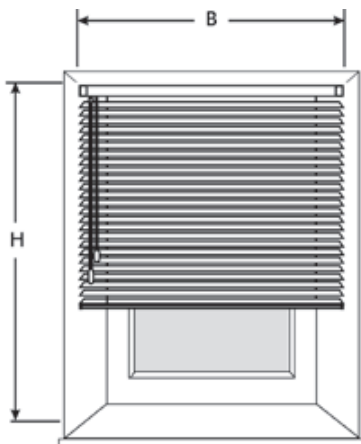

Installation in the window niche

B (width) and **H** (height) minus 5 mm = order dimension.

Note:

To establish any dimensional tolerances, measure the width **B** at several points.

(**B** = smallest width measured)

