

# XS **Double** K30 mini cassette (30mm cassette) roller for tilt and turn windows

- Size range

**30mm cassette:** Max. roller blind height\* 150 cm 170 cm

\* The maximum roller blind height depends on the fabric.





Roller shutter shaft

- Aluminium roller tube with a diameter of 19 mm

Side tension

- Side panel option available

## Cassette profile dimensioning

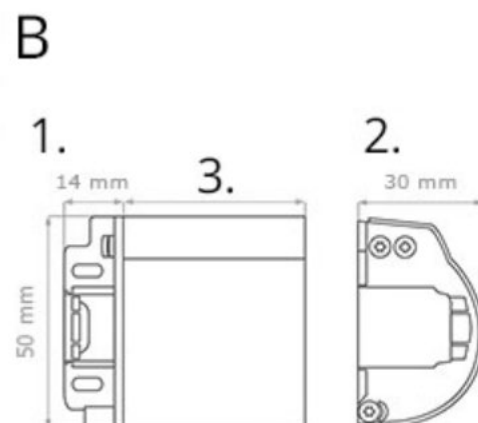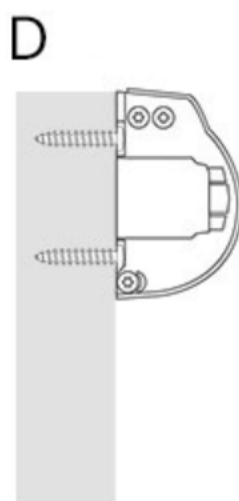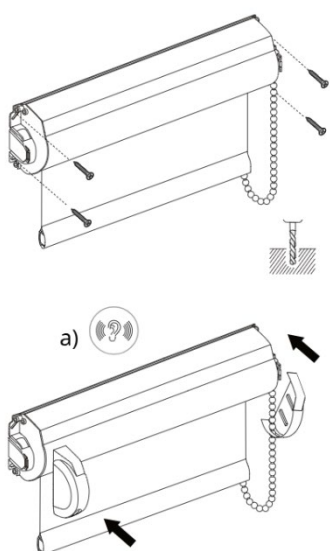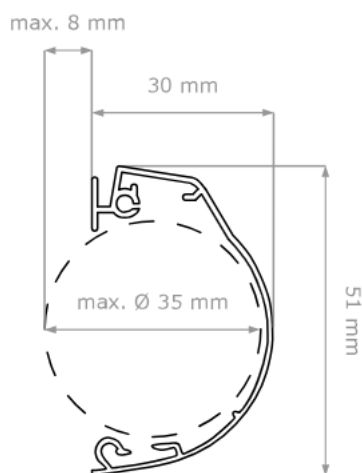

### Cassette Double K30 end profile dimension




17 mm



Small square end profile

The XS double roller blind with cassette represents the next generation in innovative roller blind technology. This roller blind system is developed with new, improved components and manufactured using fully automated technology. The compact, round aluminium cassette, available in two sizes (30 mm and 39 mm), creates a premium design. The blind can be manufactured up to a width of 150 cm. The possible blind height for the 30 mm cassette ranges from 150 to 170 cm, depending on the fabric. The XS double roller blind with cassette is well-suited for small windows as well as all **tilt-and-turn windows** and patio doors. You can choose the operating elements, aluminium profiles, and individual parts in white or silver-grey to match the components. The operation is via a side chain. The blind fabric runs within the glass bead. The blind can be equipped with an **anti-swing mechanism** to keep the blind by the window when tilted or a **side guard/panel**. This achieves a strong blackout effect, provided a light-blocking fabric is chosen

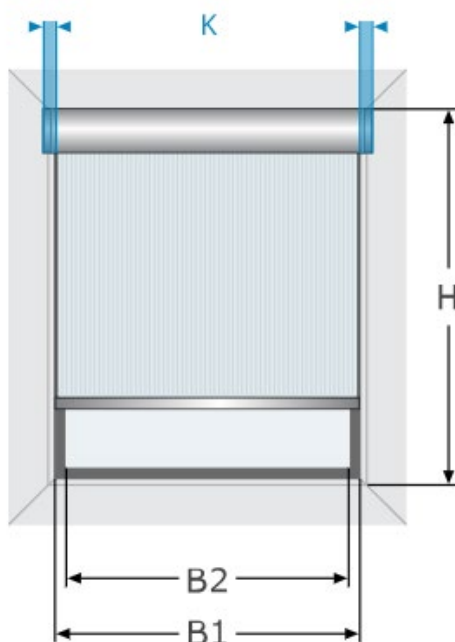

This model is screwed onto the glazing bead, providing the blind with a secure, sturdy mount.

Drilling into the glazing bead will not break the seal or void the warranty.

(glazing beads are replaceable)


The fabric runs between the glazing beads

The **cassette is approximately 1.5 cm wider on each side** than the glazing, covering the glazing bead. The **fabric width is approximately 12 mm to 18 mm** (6-9mm on each side), **less than the glass width.**

## SIDE-GUARDS/PANELS

For a complete blackout and to keep the blinds by the window when tilted, we recommend getting the side-guard/panel.

The **adhesive side guard/panel** is easily mounted along the vertical outer glazing bead and is available in matching colours, white and grey.

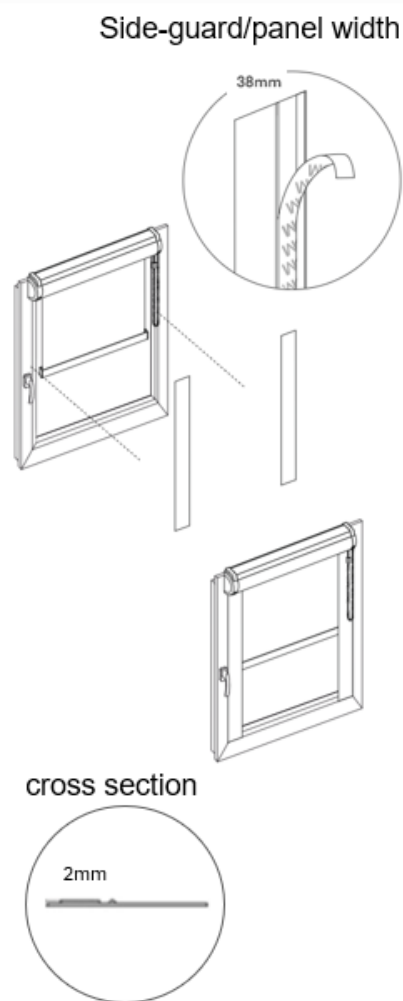

## ANTI-SWING MECHANISM


If the blinds are for a living area and no light blackout is needed

A simple anti-swing mechanism can be used to keep the blinds by the window when tilted.

The tension brackets/shoes (available in grey and white) are fastened inside the recess by screws.



Please see the installation manual [link](#) below for information.

LINK

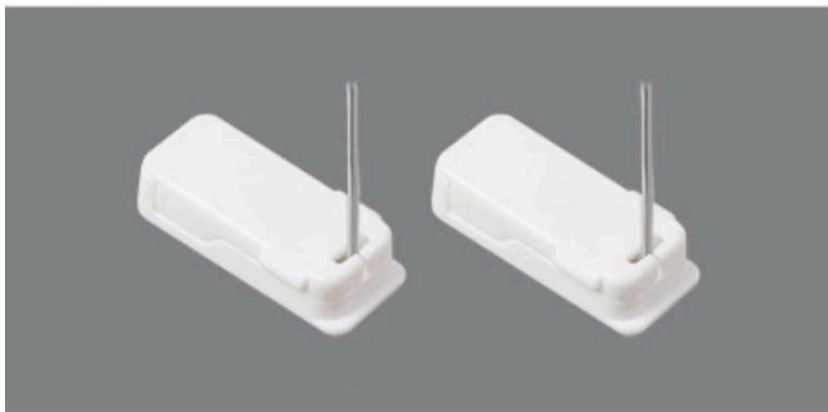

B

C

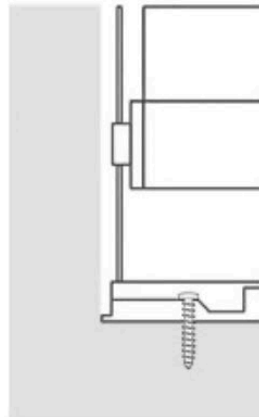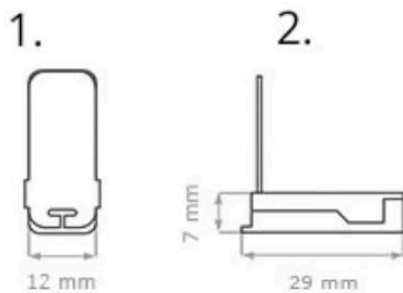

A - Side guide


Screw mounting below: in the glass strip

B - Dimensioning

1. - Top view

2. - side


C - Installation in the glazing bead

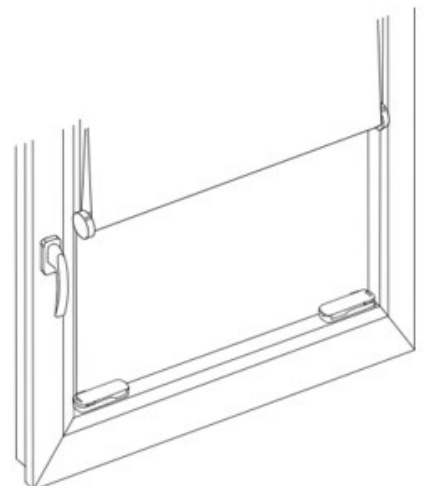


## CHAIN TENSIONER or CHAIN WEIGHT

The roller blind operation chain is tensioned and fastened outside on the vertical glazing bead with a translucent chain tensioner, or alternatively, a chain weight, with the (kid's safe) chain brake connector, that opens up if bigger force is applied

**chain tensioner**

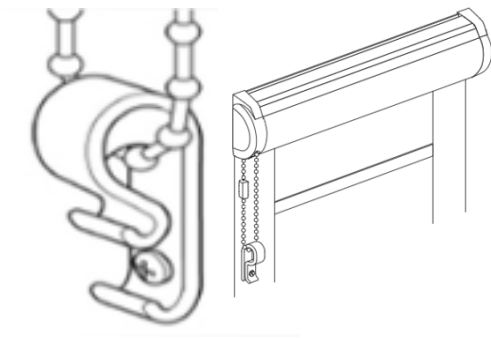

**chain weight & chain break**

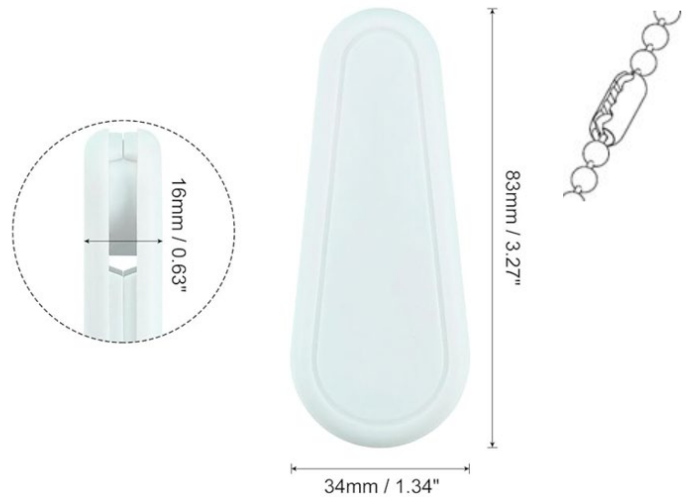

## DOUBLE ROLLER BLIND FABRICS

Choose from our large selection of translucent and dim-out double roller blind fabrics. Depending on the fabric, it can reduce heat, glare, and UV, and is suitable for the office and living areas, as well as damp areas like a bathroom and kitchen.





