

XS K30 mini-Cassette roller blind

Size range

Max. roller blind width 150mm

Max. roller blind height 170mm

* The maximum roller blind height depends on the fabric.

Operation

- Operation via side pull





Roller shutter shaft

- Aluminium roller tube with a diameter of 19 mm

Side tension


- Optional side guide/side panel

Cassette dimensioning

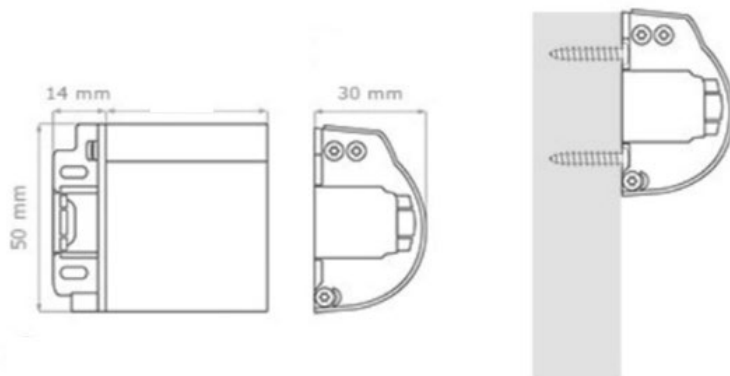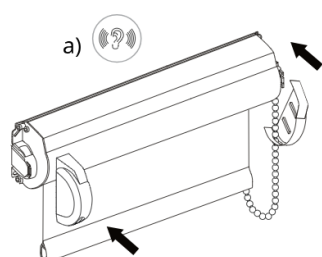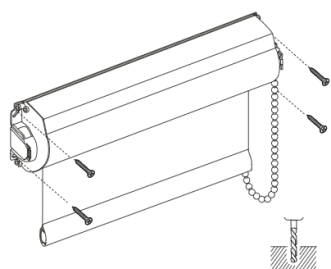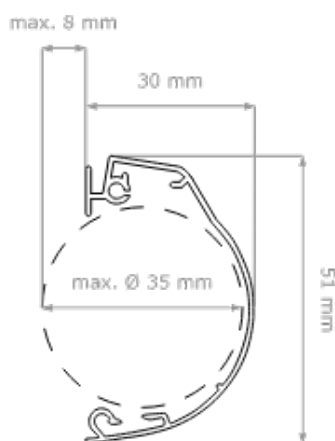

Profile dimensions

End profile:

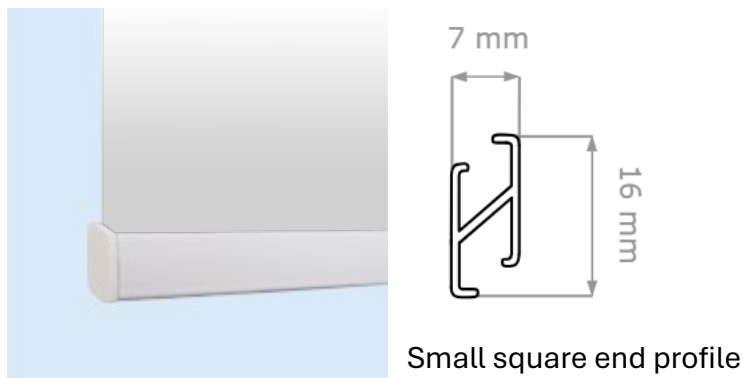


(Further end profiles available, but not in combination with the anti-swing mechanism and side guard/panel) Please ask.

The XS K30 mini cassette roller blind represents the next generation of innovative roller blind technology. This roller blind system is developed with new, improved components and manufactured using fully automated technology. The compact, round 30mm aluminium cassette (also available in 39 mm) creates a premium design. The K30 mini cassette blind can be manufactured up to 150 cm wide and 170 cm high; the maximum height varies with fabric thickness, ranging from 90 cm to 170 cm. It is suitable for small windows, **tilt-and-turn windows**, and French doors. To match the fabric, you can choose between white or silver-grey for the operating mechanism, aluminium profiles, and individual parts. Operation is via a side-pull chain mounted on the vertical glazing bead via a chain tensioner, or it can include a chain weight. Side guides/side panels are also available and keep the blind by the window when tilted, while simultaneously creating a blackout effect by preventing side light leakage.

This model is screwed onto the glazing bead, providing the blind with a secure, sturdy mount.

Drilling into the glazing bead will not break the seal or void the warranty.

(glazing beads are replaceable)

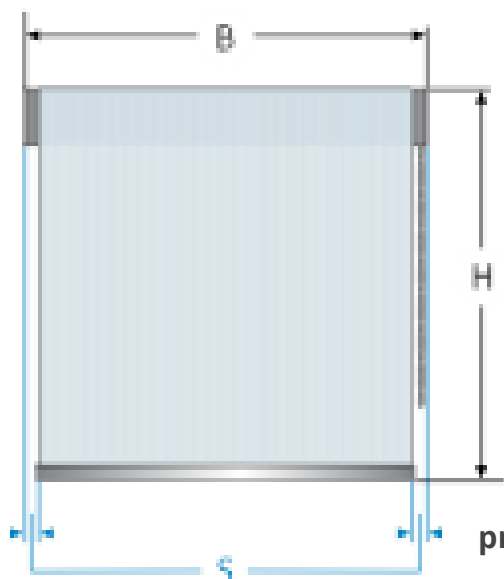

The **cassette** is approximately 15 mm wider than the glazing bead on each side.

The **fabric width** is approximately 6 mm (3mm on each side) less than the glass width and runs between the glazing beads

To keep the blinds by the window when tilted, and for extra room darkening, use the side panels is recommended

(only available with the small square end profile)

SIDE GUARD/PANEL

The **adhesive side guard/panel** is easily mounted along the vertical outer glazing bead and is available in matching colours, white and grey.



A - Side panels

Adhesive mounting: window frame

B - Dimensioning (left rail)

1. - frontal




1.1 - Roller blind cassette

1.2 - Side rail

1.3 - Order amount

2. - Cross section


C - Assembly

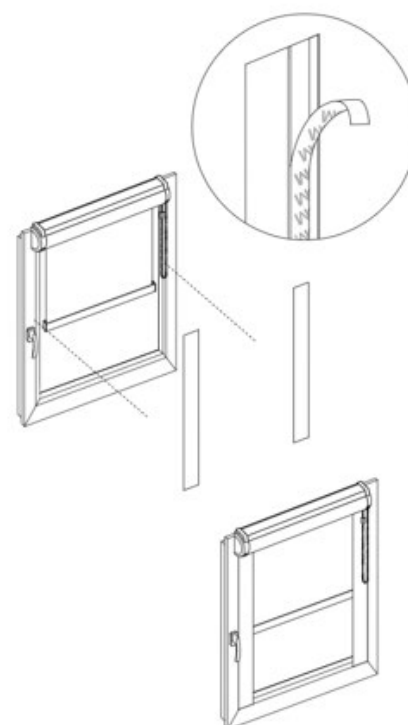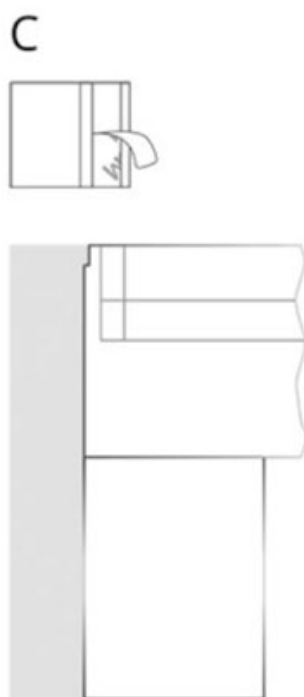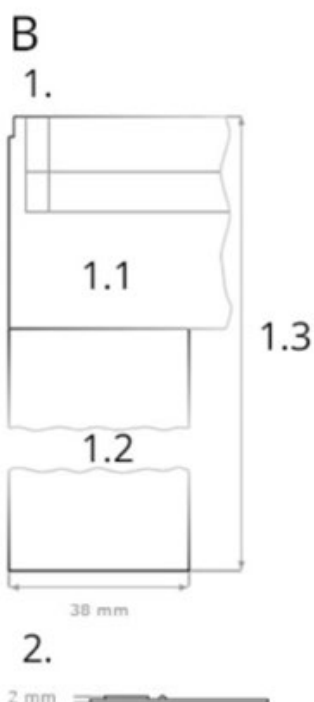


CHAIN TENSIONER or CHAIN WEIGHT

The roller blind operation chain is tensioned and fastened outside on the vertical glazing bead with a transparent chain tensioner, or alternatively, a chain weight, with the (kid's safe) chain brake connector, that opens up if a bigger force is applied

chain tensioner

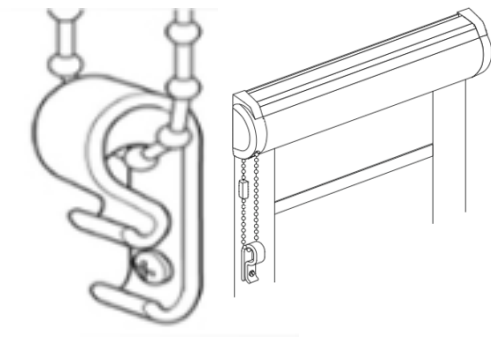

chain weight & chain break

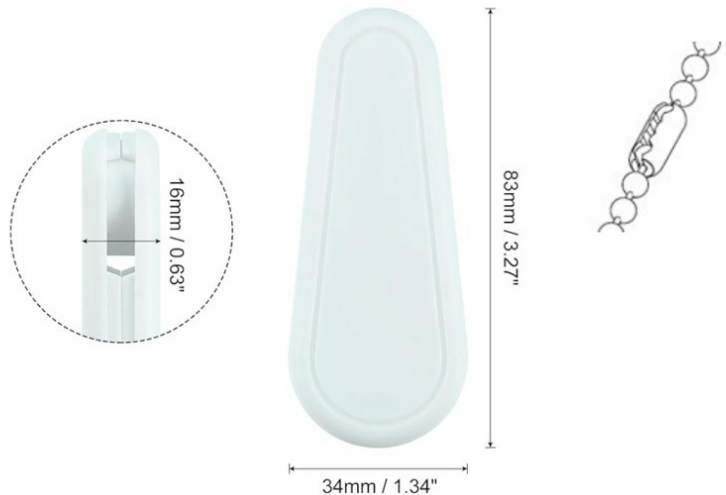

ROLLER BLIND FABRICS

Choose from a large selection of Roller blind fabrics: sunscreen fabrics for the office that reduce glare and UV while still allowing visibility to the outside, translucent and dim-out fabrics that let plenty of light into the room while reducing glare, UV, and heat, and **blackout** fabrics for total light blackout.

Many of our fabrics are OEKO-TEX 100-certified, tested for harmful substances and chemicals.



