

XS K39 mini cassette (39mm cassette) roller for tilt and turn windows

size range

39mm cassette: Max. roller blind height* 170 cm 310 cm

* The maximum roller blind height depends on the fabric.




Roller shutter shaft

- Aluminium roller tube with a diameter of 19 mm


Side tension

- Side panel option available

Cassette dimensioning

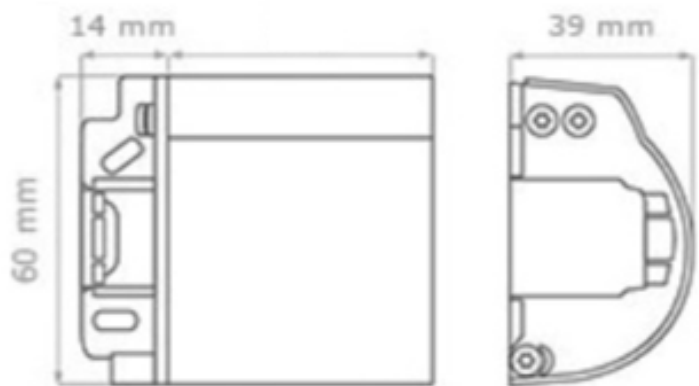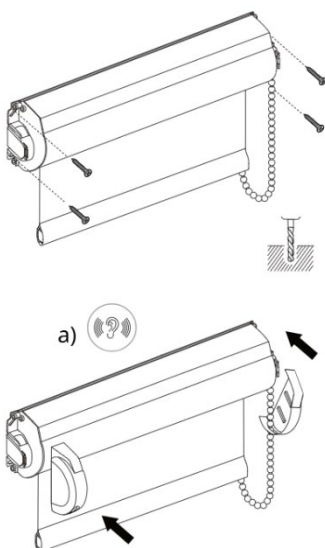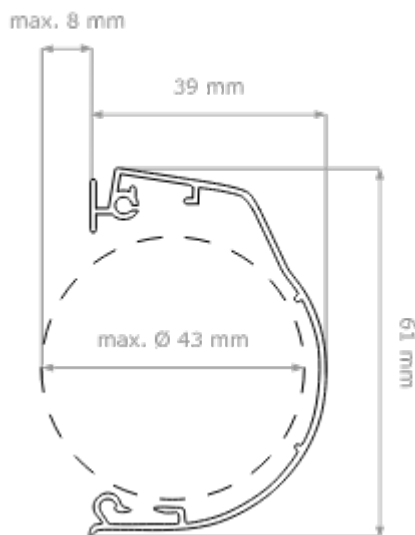


Cassette K39 Profile dimension



Small square end profile

The XS roller blind mounted on the glazing bead represents the next generation in innovative roller blind technology. This roller blind system is developed with new, improved components and manufactured using fully automated technology. The blind fabric runs within the glass bead. The blind can be equipped with an **anti-swing mechanism** (only available for the XS 39K model) to keep the blind by the window when tilted or a **side guard/panel**. This achieves a strong blackout effect, provided a light-blocking fabric is chosen. In addition, the compact, round aluminium cassette, available in two sizes (30 mm and 39 mm), creates a first-class design. The possible blind height ranges from 90 cm to 170 cm for the 30 mm cassette and from 180 cm to 310 cm for the 39 mm cassette, depending on the fabric and cassette size. The XS roller blind with cassette is ideally suited for small windows, all tilt-and-turn windows, and patio doors. To match the fabric, you can choose the operating elements, aluminium profiles, and individual parts in white or silver-grey. The operation is via a side pull with a chain with the chain

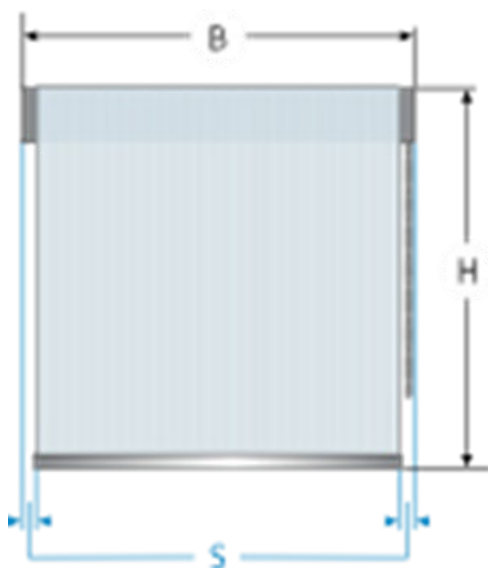

This model is screwed onto the glazing bead, providing the blind with a secure, sturdy mount.

Drilling into the glazing bead will not break the seal or void the warranty.

(glazing beads are replaceable)

The **cassette is approximately 15 mm wider** than the glazing bead on each side. The **fabric width is approximately 6 mm less than the glass width** and runs between the glazing beads

SIDE-GUARDS/PANELS (only available with the small square end profile)

For a complete blackout and to keep the blinds by the window when tilted, we recommend getting the side-guard/panel.

The **adhesive side guard/panel** is easily mounted along the vertical outer glazing bead and is available in matching colours, white and grey.

SIDE GUARD/PANEL



A - Side panels

Adhesive mounting: window frame

B - Dimensioning (left rail)

1. - frontal




1.1 - Roller blind cassette

1.2 - Side rail

1.3 - Order amount

2. - Cross section

C - Assembly

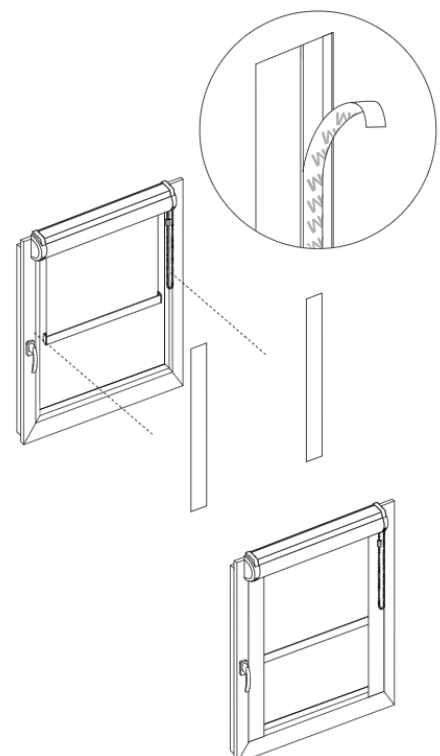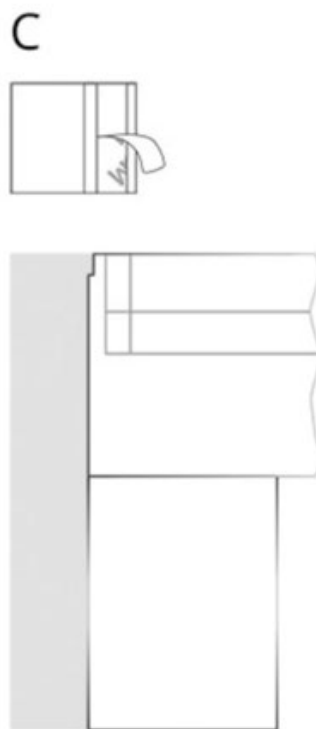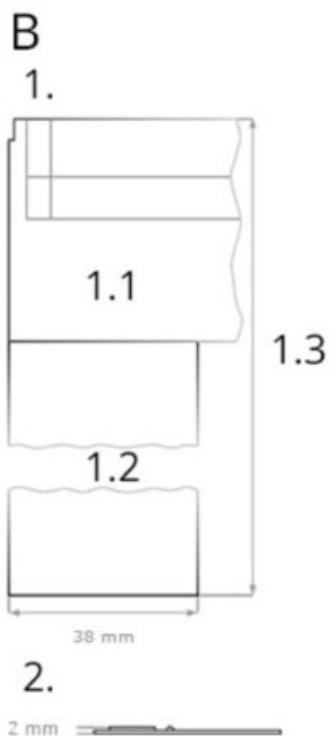

ANTI-SWING MECHANISM (only available with the small square end profile)


If the blinds are for a living area and no light blackout is needed

A simple anti-swing mechanism can be used to keep the blinds by the window when tilted.

The tension brackets/shoes (available in grey and white) are fastened inside the recess by screws.

Please see the installation manual [link](#) below for information.

LINK

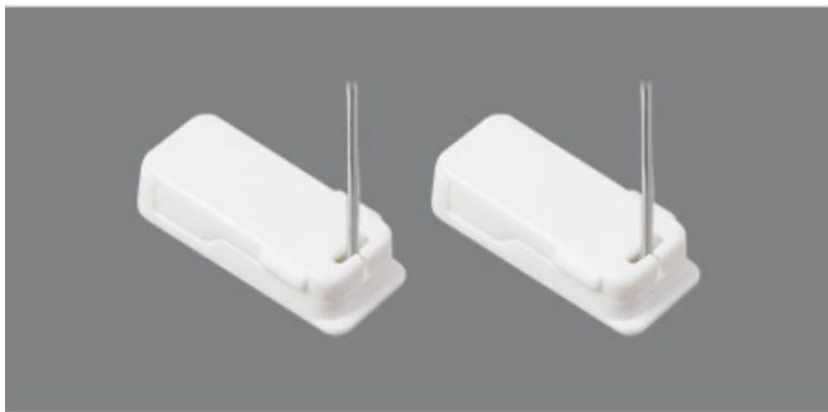



B

C

1.



2.

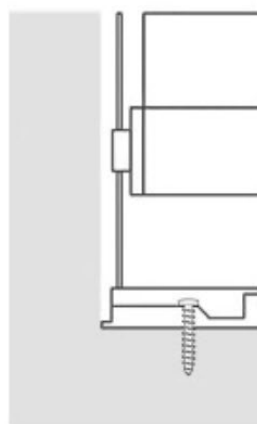

A - Side guide


Screw mounting below: in the glass strip

B - Dimensioning

1. - Top view

2. - side


C - Installation in the glazing bead

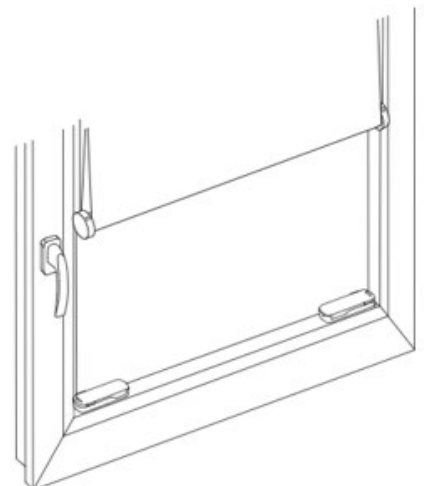


CHAIN TENSIONER or CHAIN WEIGHT

The roller blind operation chain is tensioned and fastened outside on the vertical glazing bead with a translucent chain tensioner, or alternatively, a chain weight, with the (kid's safe) chain brake connector, that opens up if a bigger force is applied

chain tensioner

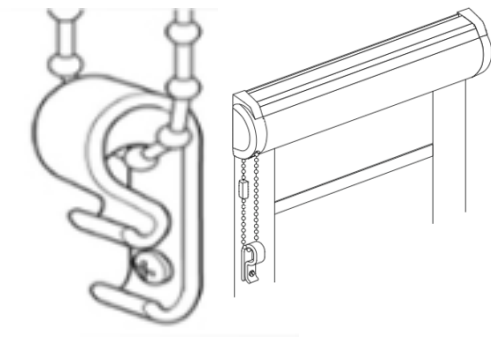

chain weight & chain break

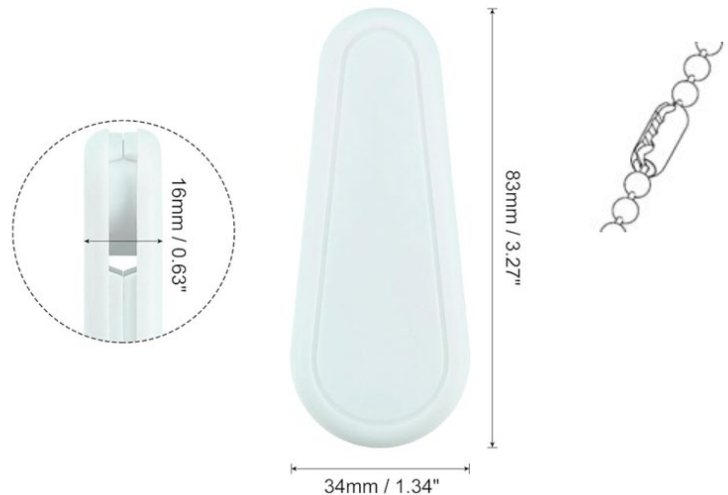

ROLLER BLIND FABRICS

Choose from a large selection of Roller blind fabrics: sunscreen fabrics for the office that reduce glare and UV while still allowing visibility to the outside, translucent and dim-out fabrics that let plenty of light into the room while reducing glare, UV, and heat, and **blackout** fabrics for total light blackout.

Many of our fabrics are OEKO-TEX 100-certified, tested for harmful substances and chemicals.

