

KADECO®



ROLLER BLINDS



22091

KADECO-Roller blinds & Panel tracks

Diversity meets design

The current KADECO collection captivates and excites with a refined sense for attitudes to life and moods. An unparalleled range of fabrics from subtle, elegant patterns to trendy, harmonious worlds of colour – roller blinds offer you a tailored solution for a wide range of requirements.

Discover a never-ending range of colour and specially designed exclusive patterns and fabrics which will fit perfectly to your personal style of interior design.

Following the Scandinavian hygge trend, our design team has developed colour combinations which create a sense of comfort, warmth and lightness in every room. We are happy to introduce our diverse collection featuring fabrics which are ideal not just for roller blinds, but are also wonderful for panel tracks.

Whether you're looking for sun protection, a colourful design element for your room ambience or just a little protection against the warmth, the possible uses for our roller blinds are virtually endless.

When it comes to our craftsmanship and creative variety, we impress with our unique aesthetic and bespoke "Made in Germany" roller blinds.




Refined engineering and function

Alongside the design, the functionality of roller blinds is of great importance. New drive technologies ensure the standard and cassette systems are convenient and simple to use.

Many details of the cassette roller blind design have been reworked and a modern square variant has been added to the range (SKE). The straight design fits perfectly into a modern interior.

Many roller blind technologies are now available in the new, elegant, trendy-white fine structure.

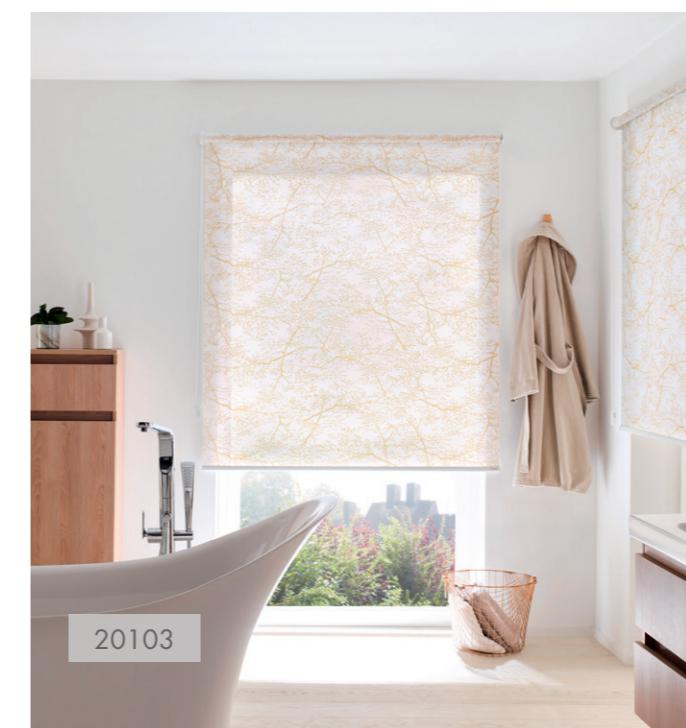



22090


Colour trends

Our trend theme colour

It does not take much to obtain a proper, hyggely atmosphere, only the right colours. They underline the unmistakably minimalist yet at the same time warm Scandinavian living style and provide comfort and serenity. We have therefore defined trend colours that provide a comfortable, feel-good atmosphere.


We're going green

From luxurious to natural, from classic to contemporary: our new green tones are varied and versatile. Whether cool tones of green, subtle sage green, delicate lime green or deep bottle green – these colours harmonise calmly and serenely with wood tones, as well as with natural materials. They appear cool and fresh together with white and grey, and offer exciting combinations with concrete, metal and velvet.

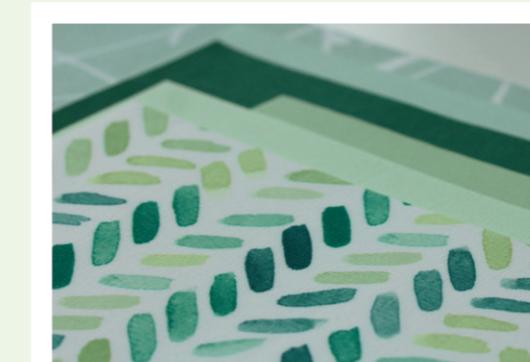

Our high-contrast triad

Our unbeatable combination of the three colours yellow, black and white ideally matches the current retro look and the formal language of the 50s, which is frequently characterised by graphic patterns. The bright bold colour combinations work together to create a refreshing and expressive atmosphere, and guarantee a good mood in any room.

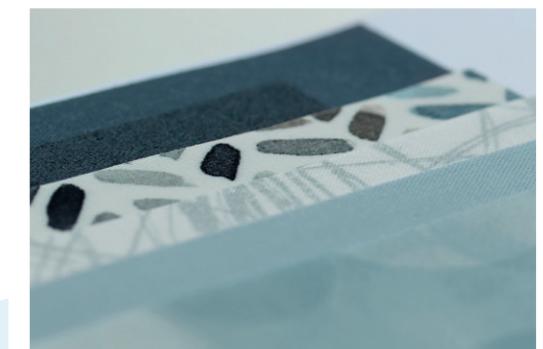

Blue-grey for moments of relaxation

Discreet, quiet pastel shades are typical of the Nordic Scandinavian style; with their lightness, they set perfect, minimalist accents in your interior design. Our soft blue-grey shades are an excellent match for interior Scandinavian dreams, and are ideal for combining with light wood tones and white. Whether as a dreamy watercolour design, elegant in conjunction with anthracite and brown, or cool on monochrome surfaces – the possible applications of KADECO trend colours are varied and are our response to the hygge lifestyle.



Functional fabric properties

KADECO roller blinds offer an infinite variety of colour, style and material combinations.

Fabrics and their properties

Our article charts for the individual properties enable a quick overview and specific advice for individual projects and areas of application. The relevant planning properties and colours were sorted for the design concept.



LevelGreen



TreviraCS



LightControl



The **LevelGreen fabrics** extend the range more towards environmentally friendly products. By using recycled materials, we conserve resources and protect the environment. The fabrics are certified according to the newest sustainability standards.

The permanently flame-resistant **TreviraCS fabrics** offer convenience and security. They guarantee long-term security and meet global fire safety regulations. **TreviraCS fabrics** impress with both the look and feel of the textiles.

The **LightControl fabrics** guarantee a fully comfortable working environment. They feature various transmittance levels to provide the ideal glare protection for each workplace, for windows facing any direction. The fabrics are PVC-free and certified according to the OEKO-TEX® standard 100.

AluReflect



ScreenStyle



The aluminised fabrics of the **AluReflect range** are available in various designs and transparency levels. In addition to good glare protection at work, heat protection also plays an important role and the desired transparency can be perfectly tailored to your needs.

Fabrics of the **ScreenStyle** series feature a textile aesthetic and pleasant visibility toward the outside. The fabrics are certified according to the newest sustainability standards and comply with global fire safety regulations.

ScreenClassic



Good light regulation can significantly improve the level of comfort in a room. The **ScreenClassic fabrics** – produced with great care for resources and in accordance with the newest sustainability certificates – are available in four opening types, so they can be tailored to the light requirements in the room.

Model overview

Technical systems

The KADECO range of roller blinds comprises four basic systems, each of which offers a perfectly matching solution for virtually any application.



Classic roller blinds

BS, S, SI and OMNIA chain-pull roller blinds



Classic roller blinds with carrier profile

ST chain-pull roller blinds



Cassette roller blinds

Semi-cassette SKH, mini-cassette SKM, cassette roller blinds
SKR/SKE, recess cassettes



Rooflight roller blinds

DFS, DFK and DFA rooflight roller blinds



Classic roller blinds

BS chain-pull roller blinds



BasicLine is our entry-level model offering particularly good value for money – complete with chain operation and infinite height adjustment.



32200

S40, S55 and S75 chain-pull roller blinds



S40



Unobtrusive covers give them a lovely appearance and conceal the fastening screws.



S55



S75 (Figure version with carrier profile)

Model S roller blinds come in three sizes featuring balanced proportions, and are superbly practical. Thanks to the newly engineered swivelling gear, the drape can be positioned just as you want and with the greatest of ease.

The thickness of the rods varies depending on the dimensions; widths of up to 350 cm are possible. Over and above this maximum dimension, widths of up to 560 cm can be achieved (with a material gap of just 22 mm) by:

- a motor on one side with synchronously moving drapes (rods) or
- manual operating mechanisms on both sides with individually adjustable drapes (rods).

	S40	S55	S75
Dimensions in cm			
Max. width	200	280	350
Max. height	340	340	340
Bottom end profile/components colour			
White microstructure/White	Standard	Standard	Standard
Anodised aluminium/Grey	○	○	○
Black/Black	○	○	-
Options			
Metal chain	MO	MO	-
Anti-swing mechanism	MO*	MO*	-
LITIO motor	-	MO	-
24 V motor	-	MO	-
230 V motor	-	MO	MO
2 roller blinds coupled	-	MO	-
MO = Option at additional cost			
○ = Option			
- = Not available			
*With semi-circular end profile			



22086

Classic roller blinds

SI chain-pull roller blind



What sets the SI roller blind apart is its particularly sophisticated appearance. The stainless steel finish of the supports, operating chains and bottom end profiles gives the SI a special elegance. Available in a maximum width of 280 cm.



The screws for fastening the SI roller blind are, of course, all subtly concealed.

SI	
Dimensions in cm	
Max. width	280
Max. height	340
Options	
LITIO motor	MO
24 V motor	MO
230 V motor	MO
MO = Option at additional cost	

OMNIA



The chic appearance of "OMNIA" roller blind technology adds a special touch to your home. High-quality brushed aluminium brackets milled from a single piece and equipped with a polished stainless-steel ring set a particularly stylish and delicate tone. The system sets the highest standards when it comes to function, design and material selection, and is largely free of plastic components.

The key elements of the OMNIA are the two side panels milled from a solid aluminium block, which fully enclose the gear and counter bearings. The gear is particularly smooth-running and quiet.



The bottom end is a 20 mm round profile with aluminium end caps.

OMNIA	
Dimensions in cm	
Max. width	280
Max. height	340
Options	
LITIO motor	MO
24 V motor	MO
230 V motor	MO
MO = Option at additional cost	



Classic roller blinds with carrier profile

ST40 and ST55 chain-pull roller blinds



ST40



ST55

The ST roller blind support is already pre-assembled on a carrier profile at the factory.

A convenient chain drive stops the drape at whatever height you want. The large model variant is available in widths of up to 280 cm.



Fastening clip

The variable positioning of the fastening clips on the carrier profile enables simple, smooth installation.

	ST40	ST55
Dimensions in cm		
Max. width	200	280
Max. height	340	340
Bottom end profile/ components colour		
White microstructure/White	Standard	Standard
Anodised aluminium/Grey	O	O
Options		
Metal chain	MO	MO
Anti-swing mechanism	MO*	MO*
LITIO motor	-	MO
24 V motor	-	MO
230 V motor	-	MO
MO = Option at additional cost O = Option - = Not available * With semi-circular end profile		



Cassette roller blinds

SKR70, SKE70 and SKR90, SKE90

Cassette roller blinds for office and administration buildings, as well as for private use, must perform a wide variety of tasks and meet many different requirements. Of course they should provide for a friendly lighting atmosphere, so that you enjoy working in these rooms. KADECQ roller blinds also allow glare-free working, without obstructing the view to the outside. Attractive design accents can thus be combined with the best functionality.

Type SKR

The cassette roller blinds are available in the rounded version in two sizes. They are easy to install and impress with their ease of use.

Type SKE

The square version of the cassette roller blinds provides a straight-line design with a puristic feel.

With widths of up to 320 cm and heights of up to 340 cm, the systems meet requirements for particularly large dimensions, for example in the project or commercial sector. As an option, the cassette roller blinds can also be operated with a metal chain or motorised.



Mounting bracket for wall or ceiling installation



SKE

SKR

Round and square cassettes

The cassettes are available for roller blind widths of up to a maximum of 320 cm and in a choice of three sizes, which ensures a uniform design with balanced proportions in a range of system sizes. The straight back lies flush against the wall, enabling the fastening clips to be positioned where needed and out of sight. In order to underline the elegant appearance, a square-design end profile measuring 8 x 30 mm is provided.

In addition to the standard chain operation, convenient motor drives can be provided, and cassettes combined up to a maximum width of 490 cm.



Cassette roller blinds can be fitted with optional lateral guide profiles and brush seals integrated on the inside. The brush seal ensures you can operate the blinds quietly.



For improved room darkening, additional brush seals can be requested for the side guides and the back of the cassette toward the wall to compensate for unevenness in the plaster and resulting light gaps. The end profile would also be fitted with an additional bottom seal in this case.

	SKR70/SKE70	SKR90/SKE90
Dimensions in cm		
Max. width	200	320
Max. height	260	340
Bottom end profile/components colour		
White microstructure/White	Standard	Standard
Anodised aluminium/Grey	<input type="radio"/>	<input type="radio"/>
Options		
Metal chain	MO	MO
Anti-swing mechanism	MO	MO
LITIO motor	MO	MO
24 V motor	MO	MO
230 V motor	MO	MO
2 roller blinds coupled	MO	MO
Use as a darkening roller blind	MO	MO
MO = Option at additional cost O = Option		

Colouring for systems and components

Standard version

The components are available in white as standard. Various models offer the option of black or anodised aluminium; please see the technical specifications in the price lists for details.

Rail colours	Plastic parts
Satin matte white	White
White gloss*	White
Black	Black
Anodised aluminium	Grey

*White gloss for BS, SKH, SKM, DFS, DFK, DFA

Plastic parts

The plastic parts are available in white, grey and black to match the colours of the metal parts.



Design version S55

We offer various design versions to visually enhance the carrier profile for the S55 model. The side supports are fitted with high-quality metal end caps and a matching end profile. You can choose from the following design colours:

Designer colours	Side support/gear
Standard for selected design colour	
Brushed matte aluminium	Grey
Matte white microstructure*	White
Matte nickel	Black
Chrome	Black
Palladium	Black
Anodised brushed black	Black
Anodised matte brass	Black

*Also available for ST55



Form and function

Bottom end profiles

Six different bottom end profiles for KADECO roller blinds are available to choose from. Most roller blinds feature a square, visible aluminium profile as standard.



Square

Standard for S, ST, SKR, SKE



Seam

Optional at no extra cost
for S, SI, ST, SKR, SKE



Round, stainless steel

Standard for SI



Drop-shaped

Only for types
BS, SKH, SKM



Semi-circular

Standard for S75
Optional at additional cost
for S, ST, SKR, SKE



Fabric covered

Optional at additional cost
for S, SI, ST, SKR, SKE



Anti-swing mechanism

An optional anti-swing mechanism provides an optional side guide for roller blind types S, ST, SKR and SKE. The anti-swing mechanism comprises a wire tensioned to the left and right of the roller blind combined with a semi-circular bottom end profile and special end caps



Coupling

Roller blind types S, SKE and SKR can be combined to create larger systems. A choice of two-sided or synchronous operation is available, which permits extension to a maximum width of 560 cm for type S and 490 cm for types SKR and SKE.

Design and convenience


Motorised roller blinds

You get even more security and comfort at the highest level with our electrically operated roller blinds. Further information on motor drives can be found in our separate motor drive brochures.



LaserCut

With the innovative LaserCut technology from KADECO, we can apply patterns, symbols or writing to your drapes using computer-aided lasers. You can take advantage of our wide range of patterns which we have already prepared. All fabrics that are suitable for LaserCut are marked with an **L** symbol on the product overview.

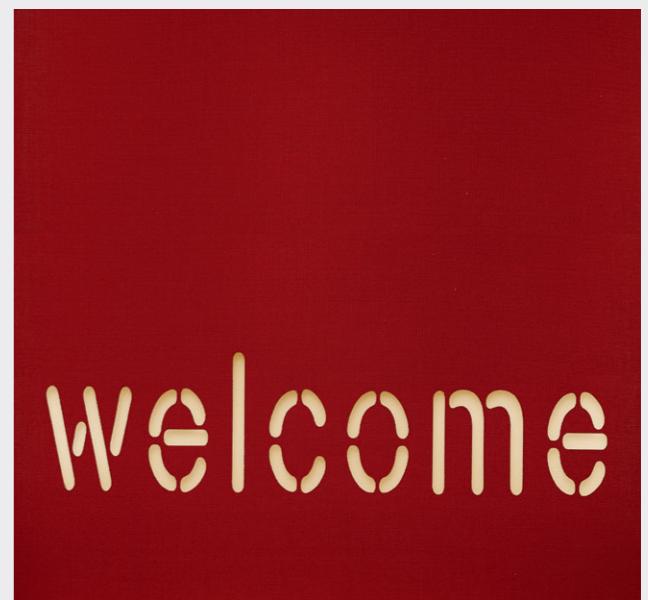

Fabric properties

Gorgeous fabrics

The KADECO collection is divided into the main categories of light-transmitting and darkening fabrics. Transparent fabrics of the ScreenClassic section as well as embossed films for micro Tex roller blinds complete the range for applications where visibility to the outside is required in addition to sun protection.

Fabrics made from recycled materials, which can be found in the LevelGreen section, are a special highlight. The recycled PES meets our high visual and technical requirements and makes a small but valuable environmental contribution when it comes to the cycle of recyclable material.

Material abbreviations	
CV	Viscose
PA	Polyamide
PES	Polyester
Recycled PES <small>[PES rec.]</small>	Recycled polyester
PET laminate	Polyethylene terephthalate laminate
PVC	Polyvinyl
Trevira CS <small>[trevira]</small>	Trevira CS



62071

Symbols and finishing

The climate in a room and the optical effect of a roller blind are dictated by the fabric's response to incident sunlight. The photometric values must be taken into account, which are assigned to each substance as percentages in the product overview.

Radiation physics distinguishes between light and energy, and thus defines the physical properties differently.

Photometric values	Solar values
--------------------	--------------

In physics, the visible range of the spectrum between 380 and 780 nm is defined as light. The reflection, transmission and absorption values indicated below always add up to 100 %.



Reflectance (visual)

The light reflectance according to EN 14501 indicates which proportion of visible sunlight is reflected by the fabric.



Reflectance (solar)

The solar reflectance according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) is reflected by the fabric.



Transmittance (visual)

The light transmittance according to EN 14501 indicates which proportion of visible sunlight can penetrate the fabric.



Transmittance (solar)

The solar transmittance according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) can penetrate the fabric.



Absorption (visual)

The light absorption according to EN 14501 indicates which proportion of visible sunlight is absorbed by the fabric.



Absorption (solar)

The solar absorption according to EN 14501 indicates which proportion of incident sunlight (entire spectrum) is absorbed by the fabric.

Energy values

The effect of the sunshade on the system comprising glazing and interior sun protection is defined using two key technical indicators: total energy transmission value (g_{total}) and reduction factor (F_C).



Total energy transmission value

The total energy transmission value (g_{total}) according to EN 13363-1 (simplified method) indicates how much solar energy can penetrate the overall system of glazing and sun protection into the room. If the aim is to save cooling energy in summer or prevent the room from heating up, then the total energy transmission value must be minimised. The sunshade should therefore reduce total transmission – the total energy transmission value should be as low as possible.



Reduction factor

The reduction factor (F_C value according to EN 14501) indicates how much a sunshade reduces the energy entry through the window. It can be a value between 0 and 1, and depends on the glass used. The F_C value should be as low as possible, as this would indicate particularly effective sun protection.

Fabric properties



Pearlescent finish

KADECO's pearlescent-coated roller blind fabrics offer multiple benefits: The finish is particularly efficient at reflecting high levels of light and heat radiation. We particularly recommend these fabrics for large areas of glass as well as for offices or conservatories.



Aluminisation

Aluminised fabrics not only have particularly good reflection properties; they are also available with varying degrees of transparency. In addition to protecting against glare and heat, they also maintain visibility to the outside.



Sound absorbing

In order to improve indoor acoustics, we offer sound-absorbing fabrics that have measurable effects and which are certified in sound-absorbing classes according to EN ISO 11654.



Teflon® finish

KADECO fabrics with Teflon® finish ensure invisible protection against soiling from a large number of household substances. Teflon® remains just as effective after cleaning and has been dermatologically tested. We recommend the use of these fabrics in kitchens and cafeterias, for example.



Fungicidal finish

This finish has a broad antimicrobial spectrum and acts as a fungicidal. Due to this property, mould cannot penetrate the fabric.



Flame resistance

Fire behaviour of the material tested according to various standards and divided into the following classes:
B1 = flame-resistant according to DIN 4102-1
M1 = non-flammable according to NF P 92-503-507



OEKO-TEX® Standard 100

This label is a certification for fabrics which are made of materials tested for harmful substances and manufactured using environmentally friendly processes. In addition, safe and socially responsible working conditions are guaranteed. OEKO-TEX® Standard 100 indicates a low-emission fabric and rules out harmful chemicals.



GREENGUARD-certification

The production of the textiles ensures that the strictest and most comprehensive requirements for reducing the emissions of indoor air pollutants are met. These textiles have been created for safe use even in sensitive environments such as schools or healthcare facilities.



Cradle to Cradle Bronze

Out of five possible certification classes, this fabric has acquired the Bronze status with regard to Cradle to Cradle criteria. This means that more than 75 % of the fabric content conforms to the C2C chemical rating.

Cradle to Cradle Certified™

Cradle to Cradle is the idea of an infinite biological cycle. In addition to the biodegradability of all materials, the Cradle to Cradle certification also takes into account the use of energy in the textile production chain, as well as CO₂ management, the responsible use of water and social fairness in production. It meets the strictest international standards for environmentally friendly interior design. The material is harmless to health and the environment.



PVC-free

This property ensures the textiles are free from plasticisers.

Energy efficiency

Saving energy

Roller blinds with high reflection values can create a much more pleasant room climate, especially when solar radiation is strong. As such, they contribute to the energy efficiency of a building by enabling the use of air conditioning systems to be significantly reduced, for example.

In this respect, motor-driven roller blinds with intelligent control systems, such as "sun monitors" are particularly efficient. The monitor automatically lowers the roller blind in bright sunlight, thus reducing the extent to which the building interior heats up.



Child-safe operation as per EN 13120

The European standard EN 13120 stipulates special requirements in respect of the child safety of sunscreens. The aim is to minimise the risk of a small child being strangled by operating chains or cord loops. If a product is fitted with such operating mechanisms, a minimum floor clearance (generally 150 cm) and the use of special safety components are mandatory.

Because the system is fitted with a chain holder at the factory, it is also possible to install the roller blinds for domestic use according to the requirements of the standard.

As a responsible manufacturer, we naturally make sure that our products comply with this standard and offer child-safe operating mechanisms for all of our models. When selecting your KADECO sunscreen, please bear in mind any local constraints in respect of child-safe and convenient operation.

Further information is available at www.kadeco.de, from your local industry association (e.g. in Germany: ViS – Verband innenliegender Sonnenschutz) or your national standards body.





12153

Suitability for use in work areas

Provide the best light for your employees

Daylight makes you feel happy, energetic and productive. These positive attributes can also be brought into the workplace – without unpleasant side-effects such as glare, heat radiation or reflections on computer screens. The design of modern workplaces actually has such a significant effect on the health and well-being of employees, that information, guidelines and legal regulations have been created to ensure this is taken into consideration.

From 1996 to 2016, the German Screen Work Ordinance (BildschirmV) represented the German implementation of the authoritative EU regulations in this area.

When the German Workplace Ordinance (ArbStättV) was amended on 3 December 2016, the BildschirmV was merged with the ArbStättV, which is legally binding in Germany. The ArbStättV covers every aspect of designing workplaces and working conditions with regard to the health and safety of employees.

What are considered good conditions in monitor-based workplaces?

- Every window must be fitted with a suitable, individually adjustable privacy shield and glare protection device
- bothersome reflections and glares on screens must be prevented as much as possible
- Equipment should be adjustable so that users have a line of sight to the outside world, for most of the time at least
- It must be possible to react flexibly to changing daylight conditions
- The workplace must be sufficiently lit
- Screens must be at an approximately 90° angle in relation to the window in order to reduce reflections in general (note examples provided by the German Social Accident Insurance)

Practical information about implementing the EU directive can be found at: German Social Accident Insurance (DGUV) Information 215-444 (sun protection in offices).


Find easy, attractive ways to implement legal requirements with KADECO

Workplace windows must have an effective and flexible glare protection system in place so that employees can benefit from daylight, but won't be disturbed. Since you can individually react to the amount of incident light with KADECO's interior privacy screens and sunscreens, these are suitable as internal glare protection at the workplace.

Current legal requirements, standards and directives:

- German Workplace Ordinance, ArbStättV, Appendix 6 (measures for the design of monitor-based workplaces)
- Technical regulations for workplaces, ASR 3.4 (lighting)
- German Social Accident Insurance DGUV Information 215-444
- Lighting of work places – Indoor work places, EN 12464-1
- Ergonomic requirements for office work with visual display terminals, EN ISO 9241-6

Recommended transmission values

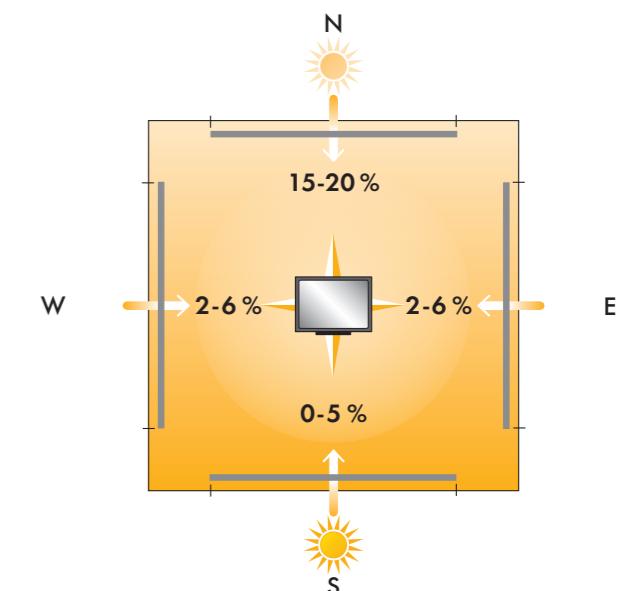

Note:

This information does not claim to be complete, and does not exclude any other equivalent technical solutions that are equally safe. In certain unfavourable situations, additional external glare protection may be necessary.

Suitability for use in work areas

Fabrics marked as follows are suitable for monitor-based workplaces facing the following directions:

South – West – North – East
Light transmission of the fabric 0-5 %

West – North – East
Light transmission of the fabric 6 %

North
Light transmission of the fabric 7-20 %

You can find additional information on this topic in the brochure "Optimale Lichtbedingungen für Bildschirmarbeitsplätze durch innenliegenden Sicht- und Sonnenschutz" (Optimal lighting conditions for monitor-based workplaces via internal sight and sun protection systems) by the ViS (Association of internal sight and sun protection systems).

Care information

The finish makes KADECO roller blinds insensitive to dust and dirt. If you do want to clean them, please observe the special instructions indicated by the cleaning symbols and the enclosed instructions.



Brushing

Soiling (e.g. dust) can generally be removed with a soft clothes brush or carefully vacuumed off.



Damp cloth

To moist-wipe the roller blind, place it on a smooth surface. Wipe the roller blind carefully on both sides with a soft cloth that has been moistened with mild detergent.



Cleaning bath (for panel tracks only)

Loosely roll up the lengths of fabric. Reach into the rolled up length of fabric from the side and move it around in warm mild detergent (max. 30°C) for no more than 10-15 minutes. After immersing the fabric, rinse it out with clean water, let it drip for a moment and then hang it back up while still wet. Once the bottom profile has been attached to the lengths of fabric, hang them up (with a towel underneath to catch the drips) and allow them to dry with the window open.

Important: Do not iron the fabrics!

Mechanical parts of electrical units must not come into contact with water!

If you are cleaning glass and window frames, never use abrasive or alkali detergents. We cannot accept any liability for fabric damage caused by condensation, detergents or insects soiling the fabric. Nor do we accept any liability for subsequent damage due to incorrect handling of our products.

Please see our product overview for recommendations on how to care for the various fabrics.



Product overview

Art.no.	Page																						
		↔ cm	↔ cm	kg/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Gtotal*	Fc-Wert*	Solar values	S%	R%	S%	A%	Gtotal*	Fc-Wert*
00112	33	200	PES	-	180	0.40	-	5-6	10	5	85	NW ^E WS ^S	10	5	85	0.62	0.89	-	-	-	-	-	-
00205	23	200	PES	-	195	0.34	-	5	51	20	29	NW ^E WS ^S	50	23	27	0.45	0.64	✓	-	-	-	-	-
00206	23	200	PES	-	195	0.34	-	5	59	21	20	-	54	24	22	0.43	0.61	✓	-	-	-	-	-
00207	14	200	PES	-	195	0.34	-	5	30	11	59	NW ^E WS ^S	42	19	39	0.48	0.69	✓	-	-	-	-	-
00208	23	200	PES	-	195	0.34	-	5	66	21	13	-	57	24	19	0.41	0.59	✓	-	-	-	-	-
00209	27	200	PES	-	195	0.34	-	5	12	3	85	NW ^E WS ^S	29	10	61	0.54	0.77	✓	-	-	-	-	-
00210	27	200	PES	-	195	0.34	-	5	8	2	90	NW ^E WS ^S	17	3	80	0.59	0.84	✓	-	-	-	-	-
00215	14	200	PES	-	195	0.34	-	5	9	4	87	NW ^E WS ^S	25	11	64	0.55	0.79	✓	-	-	-	-	-
00216	25	200	PES	-	195	0.34	-	5	33	6	61	NW ^E WS ^S	32	10	58	0.52	0.75	✓	-	-	-	-	-
00217	15	200	PES	-	195	0.34	-	5	54	44	2	-	45	50	5	0.48	0.68	✓	-	-	-	-	-
00338	24	200	PES	-	210	0.30	-	4-6	32	15	53	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-
00340	LivingColours	200	PES	-	210	0.30	-	4-6	32	15	53	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-
00341	LivingColours	200	PES	-	210	0.30	-	4-6	31	15	54	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-
00343	LivingColours	200	PES	-	210	0.30	-	4-6	30	14	56	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-
00346	LivingColours	200	PES	-	210	0.30	-	4-6	31	8	61	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-
00348	LivingColours	200	PES	-	210	0.30	-	4-6	67	19	14	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-

Art.no.	Page																								
		↔ cm	↔ cm	kg/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Gtotal*	Fc-Wert*	Solar values	S%	R%	S%	A%	Gtotal*	Fc-Wert*		
00349	LivingColours	200	PES	-	210	0.30	-	4-6	60	19	21	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00350	LivingColours	200	PES	-	210	0.30	-	4-6	50	18	32	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00353	27	200	PES	-	210	0.30	-	4-6	18	7	75	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00355	LivingColours	200	PES	-	210	0.30	-	4-6	56	21	23	-	-	-	-	-	✓	-	-	-	-	-			
00357	LivingColours	200	PES	-	210	0.30	-	4-6	43	16	41	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00358	LivingColours	200	PES	-	210	0.30	-	4-6	42	12	46	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00360	LivingColours	200	PES	-	210	0.30	-	4-6	16	6	78	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00361	33	200	PES	-	210	0.30	-	4-6	25	6	69	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-		
00413	16	215	75 % PES, 25 % PA	-	50	0.38	-	5-6	16	82	2	-	19	80	1	0.61	0.87	✓	✓	-	-	-	-		
00414	21	215	75 % PES, 25 % PA	-	50	0.38	-	5-6	10	85	5	-	14	85	1	0.63	0.90	✓	✓	-	-	-	-		
02013	21	200	PES	-	180	0.40	-	5-6	75	20	5	-	70	25	5	0.36	0.51	-	-	-	-	-	-		
02014	29	200	PES	-	180	0.40	-	5-6	55	10	35	NW ^E WS ^S	55	15	30	0.42	0.60	-	-	-	-	-	-		
02016	22	200	PES	-	180	0.40	-	5-6	75	10	5	85	10	5	85	0.62	0.89	-	-	-	-	-	-		
02020	31	200	PES	-	195	0.34	-	5	13	8	79	31	20	49	0.53	0.76	✓	-	-	-	-	-	-		
02027	14	200	PES	-	195	0.34	-	5	75	23	2	-	65	25	10	0.38	0.54	✓	-	-	-	-	-	-	
02028	17	240	PES	-	210	0.30	-	4-6	67	19	14	NW ^E WS ^S	-	-	-	-	-	✓	-	-	-	-	-	-	-

* Values measured on double glazing with thermal insulation coating EN_13363-1 gWindow = 0.7, UVWindow = 1.6

Product overview

Art.no.	Page						Photometric values		Solar values		Global * %	Fi- Wert *									
02030	19	200	PES	-	195	0.34	-	5	57	21	22	-	50	26	24	0.45	0.64				
02031	19	200	PES	-	195	0.34	-	5	69	24	7	-	58	24	18	0.41	0.58				
02032	19	240	PES	-	195	0.34	-	5	54	31	15	-	48	31	21	0.45	0.64				
02033	19	200	PES	-	195	0.34	-	5	49	10	41		44	16	40	0.47	0.67				
02035	22	200	PES	-	195	0.34	-	5	22	3	75		22	3	75	0.57	0.81				
02036	27	200	PES	-	195	0.34	-	5	37	8	55		41	13	46	0.48	0.69				
02037	24	200	PES	-	195	0.34	-	5	50	30	20	-	48	38	14	0.46	0.66				
02038	25	200	PES	-	195	0.34	-	5	13	8	79		31	20	49	0.53	0.76				
02039	26	200	PES	-	195	0.34	-	5	13	3	84		15	3	82	0.60	0.85				
02041	32	200	PES	-	195	0.34	-	5	35	6	59		34	8	58	0.51	0.73				
02048	LivingColours	250	PES	-	210	0.30	-	4-6	40	14	46		-	-	-	-	-				
02050	LivingColours	200	PES	-	210	0.30	-	4-6	11	3	86		-	-	-	-	-				
02051	LivingColours	250	PES	-	210	0.30	-	4-6	52	12	36		-	-	-	-	-				
02052	LivingColours	250	PES	-	210	0.30	-	4-6	45	15	40		-	-	-	-	-				
02053	LivingColours	200	PES	-	210	0.30	-	4-6	32	13	55		-	-	-	-	-				
02054	LivingColours	200	PES	-	210	0.30	-	4-6	32	15	53		-	-	-	-	-				

Art.no.	Page						Photometric values		Solar values		Global * %	Fi- Wert *									
02055	24	200	PES	-	210	0.30	-	4-6	37	16	47		-	-	-	-					
02055	LivingColours	200	PES	-	210	0.30	-	4-6	22	9	69		-	-	-	-					
02056	LivingColours	200	PES	-	210	0.30	-	4-6	21	4	75		-	-	-	-					
02057	LivingColours	200	PES	-	210	0.30	-	4-6	57	21	22		-	-	-	-					
02058	LivingColours	200	PES	-	210	0.30	-	4-6	54	20	26		-	-	-	-					
02059	LivingColours	200	PES	-	210	0.30	-	4-6	30	16	54		-	-	-	-					
02060	LivingColours	200	PES	-	210	0.30	-	4-6	29	13	58		-	-	-	-					
02061	LivingColours	200	PES	-	210	0.30	-	4-6	69	12	66		-	-	-	-					
02062	26	200	PES	-	210	0.30	-	4-6	40	14	46		-	-	-	-					
02171	20	200	PES	-	190	0.30	-	6-7	69	19	12		66	20	14	0.45	0.70				
02176	29	200	PES	-	190	0.30	-	6-7	42	14	44		40	12	48	0.45	0.70				
02179	29	200	PES	-	190	0.30	-	6-7	59	18	57		7	7	86	0.64	0.91				
02181	26	200	PES	-	190	0.30	-	6-7	39	15	46		57	17	26	0.41	0.59				
02184	32	200	PES	-	190	0.30	-	6-7	52	14	34		49	16	35	0.45	0.64				
02185	32	200	PES	-	190	0.30	-	6-7	39	15	46		37	17	46	0.40	0.72				
02186	32	200	PES	-	350	0.50	-	5-6	80	0	20		75	0	25	0.32					

Product overview

Art.no.	Page																			
		↔ cm	↔ cm	g/m ²	mm	→ ↘ mm	→ ↘ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fi-Wert	▪▪▪	▪▪▪	▪▪▪
10204	20	200	PES	-	200	0.35	-	5	77	18	5	NW	65	25	10	0.38	0.54	✓	◀	-
10220	21	200	PES	(PERL)	185	0.34	-	5	70	22	8	-	61	30	9	0.40	0.57	✓	-	-
10222	32	200	PES	(PERL)	185	0.34	-	5	59	18	23	NW	54	25	21	0.43	0.61	✓	-	-
10223	31	200	PES	(PERL)	185	0.34	-	5	43	5	52	NW	42	8	50	0.48	0.68	✓	-	-
10313	2	200	PES	-	330	0.45	-	4-6	82	0	18	NW	-	-	-	-	-	◀	-	-
10315	4	200	PES	-	330	0.45	-	4-6	55	0	45	NW	-	-	-	-	-	◀	-	-
10316	6	200	PES	-	330	0.45	-	4-6	68	0	32	NW	-	-	-	-	-	◀	-	-
10318	13	200	PES	-	330	0.45	-	4-6	69	0	31	NW	-	-	-	-	-	◀	-	-
10319	LivingColours	200	PES	-	330	0.45	-	4-6	49	0	51	NW	-	-	-	-	-	◀	-	-
10320	7	200	PES	-	330	0.45	-	4-6	51	0	49	NW	-	-	-	-	-	◀	-	-
10320	LivingColours	200	PES	-	330	0.45	-	4-6	45	0	55	NW	-	-	-	-	-	◀	-	-
10321	1	200	PES	-	330	0.45	-	4-6	45	0	55	NW	-	-	-	-	-	◀	-	-
10321	LivingColours	200	PES	-	330	0.45	-	4-6	45	0	55	NW	-	-	-	-	-	◀	-	-
10322	8	200	PES	-	330	0.45	-	4-6	15	0	85	NW	-	-	-	-	-	◀	-	-
10323	8	200	PES	-	330	0.45	-	4-6	17	0	83	NW	-	-	-	-	-	◀	-	-
10323	LivingColours	200	PES	-	330	0.45	-	4-6	17	0	83	NW	-	-	-	-	-	◀	-	-

Art.no.	Page																			
		↔ cm	↔ cm	g/m ²	mm	→ ↘ mm	→ ↘ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fi-Wert	▪▪▪	▪▪▪	▪▪▪
10324	7	200	PES	-	330	0.45	-	4-6	60	0	40	NW	-	-	-	-	-	◀	-	-
10324	LivingColours	200	PES	-	330	0.45	-	4-6	60	0	40	NW	-	-	-	-	-	◀	-	-
10326	1	200	PES	-	330	0.45	-	4-6	35	0	65	NW	-	-	-	-	-	◀	-	-
10327	1	200	PES	-	330	0.45	-	4-6	44	0	56	NW	-	-	-	-	-	◀	-	-
10327	LivingColours	200	PES	-	330	0.45	-	4-6	44	0	56	NW	-	-	-	-	-	◀	-	-
10328	7	200	PES	-	330	0.45	-	4-6	18	0	82	NW	-	-	-	-	-	◀	-	-
10425	32	215	75 % PES, 25 % PA	(ALU)	55	0.40	-	5-6	43	20	-	41	46	13	0.49	0.71	-	✓	-	-
10430	28	200	PES	(PERL)	180	0.38	-	5-6	12	0	88	NW	11	0	89	0.61	0.88	✓	-	-
10580	4	200	PES	(ALU)	310	0.50	-	4-5	62	0	38	NW	-	-	-	-	-	◀	-	-
10581	10	200	PES	(ALU)	310	0.50	-	4-5	62	0	38	NW	-	-	-	-	-	◀	-	-
10582	2	200	PES	(ALU)	310	0.50	-	4-5	62	0	38	NW	-	-	-	-	-	◀	-	-
10583	13	200	PES	(ALU)	310	0.50	-	4-5	62	0	38	NW	-	-	-	-	-	◀	-	-
10636	31	238	PES	-	155	0.36	B1 M1	5-6	35	34	-	35	36	29	0.52	0.74	✓	✓	-	
10700	LightControl	230	PES	(PERL)	260	0.35	B1	6-7	79	10	11	NW	76	12	12	0.32	0.45	✓	✓	-
10701	LightControl	230	PES	(PERL)	260	0.35	B1	6-7	79	10	11	NW	71	13	16	0.34	0.47	✓	✓	-
12002	8	200	PES	-	350	0.50	-	5-6	80	0	20	NW	75	0	25	0.32	0.46	-	-	-
12004	11	200	PES	-	350	0.50	-	5-6	80	0	20	NW	75	0	25	0.32	0.46	-	-	-
12005	12	200	PES	-	350	0.50	-	5-6	80	0	20	NW	75	0	25	0.32	0.46	-	-	-

* Values measured on double glazing with thermal insulation coating EN_13363-1 gWindow = 0.7, UVWindow = 1.6

Product overview

Art.no.	Page	↔ cm			g/m ²		mm	Photometric values			Solar values			Global *% S _R S _A	Global *% S _R S _A	Fc-Wert				
										%			%							
12029	15	200	PES		204	0.35	-	5	67	29	4	-	60	31	9	0.40	0.58			
12034	22	200	PES		204	0.35	-	5	67	1	32		61	3	36	0.39	0.55			
12042	6	200	PES	-	330	0.45	-	4-6	19	0	81		-	-	-	-	-			
12043	8	200	PES	-	330	0.45	-	4-6	51	0	49		-	-	-	-	-			
12044	9	200	PES	-	330	0.45	-	4-6	37	0	63		-	-	-	-	-			
12044	LivingColours	200	PES	-	330	0.45	-	4-6	13	0	87		-	-	-	-	-			
12045	LivingColours	200	PES	-	330	0.45	-	4-6	13	0	87		-	-	-	-	-			
12046	13	250	PES	-	330	0.45	-	4-6	45	0	55		-	-	-	-	-			
12047	LivingColours	200	PES	-	330	0.45	-	4-6	27	0	73		-	-	-	-	-			
12145	LightControl	300	PES	-	155	0.36	B1 M1	5-6	43	31	26	-	44	40	16	0.48	0.64			
12146	LightControl	300	PES	-	240	0.30	B1 M1	6-7	84	15	1		72	16	12	0.34	0.47			
12147	LightControl	300	PES	-	240	0.30	B1 M1	6-7	71	15	14		64	17	19	0.46	0.64			
12148	LightControl	300	PES	-	240	0.30	B1 M1	6-7	69	9	22		64	13	23	0.38	0.52			
12149	LightControl	300	PES	-	240	0.30	B1 M1	6-7	30	0	70		29	2	69	0.53	0.76			

Art.no.	Page	↔ cm			g/m ²		mm	Photometric values			Solar values			Global *% S _R S _A	Global *% S _R S _A	Fc-Wert				
										%			%							
12150	LightControl	230	PES	-	240	0.30	B1 M1	6-7	16	6	78		13	18	69	0.52	0.72			
12151	LightControl	230	PES		260	0.35	B1	6-7	77	7	16		70	11	19	0.35	0.48			
12152	LightControl	230	PES		260	0.35	B1	6-7	70	3	27		64	6	30	0.38	0.54			
12153	LightControl	230	PES		260	0.35	B1	6-7	59	0	41		52	1	47	0.43	0.61			
12154	LightControl	230	PES		260	0.35	B1	6-7	58	1	41		51	1	48	0.43	0.59			
12166	17	200	PES	-	210	0.45	-	6-7	77	15	8		75	18	7	0.33	0.47			
12169	19	200	PES	-	210	0.45	-	6-7	48	14	38		43	15	42	0.47	0.68			
12170	20	230	PES	-	210	0.32	-	6-7	24	13	63		21	18	61	0.58	0.82			
12172	20	200	PES	-	210	0.45	-	6-7	42	12	46		40	15	45	0.49	0.70			
12173	20	200	PES		200	0.30	-	6-7	53	16	31		49	21	30	0.45	0.64			
12177	29	200	PES	-	210	0.45	-	6-7	55	20	25		48	23	29	0.45	0.65			
12180	23	200	PES	-	210	0.45	-	6-7	62	15	23		57	16	27	0.41	0.59			
12183	30	200	PES		200	0.30	-	6-7	64	15	21		61	19	20	0.39	0.56			
12187	32	200	PES	-	210	0.40	-	5-6	50	0	-		45	50</td						

Product overview

Art.no.	Page																					
		↔ cm	↔ cm	g/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fc-Wert	FC	UV	Water	Hand	L
20236	10	200	PES	-	305	0.36	-	6	82	0	18	NW ^E WS ^E	70	0	30	0.35	0.47	✓	-	-	-	-
20237	13	200	PES	-	305	0.36	-	6	82	0	18	NW ^E WS ^E	70	0	30	0.35	0.47	✓	-	-	-	-
20239	4	240	PES	-	305	0.36	-	6	82	0	18	NW ^E WS ^E	70	0	30	0.35	0.47	✓	-	-	-	-
20241	13	200	PES	-	305	0.36	-	6	82	0	18	NW ^E WS ^E	70	0	30	0.35	0.47	✓	-	-	-	-
20410	33	200	PES	-	165	0.38	-	5–6	47	53	0	-	47	53	0	0.47	0.67	✓	✓	-	-	-
20411	27	200	PES	-	165	0.38	-	5–6	47	53	0	-	48	52	0	0.46	0.66	✓	✓	-	-	-
20412	19	200	PES	-	165	0.38	-	5–6	48	52	0	-	48	52	0	0.46	0.66	✓	✓	-	-	-
20426	21	215	75 % PES, 25 % PA	[ALU]	55	0.40	-	5–6	24	32	44	-	33	25	42	0.47	0.79	-	-	-	-	-
20428	18	240	PES	-	200	0.43	-	5–6	52	48	0	-	53	47	0	0.44	0.63	✓	✓	-	-	-
20436	23	195	PES	-	160	0.26	-	5–6	57	41	2	-	56	39	5	0.42	0.61	✓	✓	-	-	-
20438	21	195	PES	-	160	0.26	-	5–6	72	28	0	-	69	29	2	0.36	0.52	✓	✓	-	-	-
20439	21	195	PES	-	160	0.26	-	5–6	56	38	6	-	54	38	8	0.43	0.62	✓	✓	-	-	-
20440	25	195	PES	-	160	0.26	-	5–6	52	33	15	-	49	33	18	0.45	0.65	✓	✓	-	-	-
20441	27	195	PES	-	160	0.26	-	5–6	39	20	41	NW ^E WS ^E	44	26	30	0.47	0.68	✓	✓	-	-	-
20442	18	195	PES	-	160	0.26	-	5–6	63	37	0	-	63	37	0	0.39	0.56	✓	✓	-	-	-
20446	18	235	PES	-	200	0.40	-	5–6	46	48	6	-	51	45	4	0.45	0.64	✓	✓	-	-	-
20452	18	200	PES	-	160	0.36	-	5–6	54	46	0	-	56	44	0	0.43	0.61	✓	✓	-	-	-

Art.no.	Page																					
		↔ cm	↔ cm	g/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fc-Wert	FC	UV	Water	Hand	L
20527	15	250	PES	-	125	0.24	-	5	49	40	11	-	-	-	-	-	-	-	-	-	✓	
20714	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	55	42	3	-	48	32	20	0.45	0.70	✓	✓	-	-	✓
20715	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	46	37	17	-	47	40	13	0.47	0.67	✓	✓	-	-	✓
20717	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	54	45	1	-	50	43	7	0.45	0.64	✓	✓	-	-	✓
20718	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	46	31	23	-	49	36	15	0.46	0.65	✓	✓	-	-	✓
20719	TreviraCS	230	[Leinen]	-	200	0.35	B1 M1	6–7	17	13	70	NW ^E WS ^E	16	12	72	0.45	0.70	✓	✓	-	-	✓
20720	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	30	20	50	NW ^E WS ^E	42	32	26	0.48	0.69	✓	✓	-	-	✓
20721	TreviraCS	300	[Leinen]	-	200	0.35	B1 M1	6–7	5	11	84	NW ^E WS ^E	7	13	80	0.45	0.70	✓	✓	-	-	✓
20722	17	230	PES	-	120	0.28	-	6–7	47	38	15	-	42	42	16	0.49	0.70	✓	✓	-	-	✓
20724	LightControl	300	PES	-	420	0.50	B1 M1	6–7	84	0	16	NW ^E WS ^E	71	0	29	0.33	0.46	✓	✓	-	-	-
20725	LightControl	300	PES	-	420	0.50	B1 M1	6–7	84	0	16	NW ^E WS ^E	71	0	29	0.33	0.46	✓	✓	-	-	-
20726	LightControl	300	PES	-	420	0.50	B1 M1	6–7	84	0	16	NW ^E WS ^E	71	0	29	0.33	0.46	✓	✓	-	-	-
20727	LightControl	300	PES	-	420	0.50	B1 M1	6–7	84	0	16	NW ^E WS ^E	71	0	29	0.33	0.46	✓	✓	-	-	-
20728	LightControl	300	PES	-	420	0.50	B1 M1	6–7	84	0	16	NW ^E WS ^E	71	0	29	0.33	0.46	✓	✓	-	-	-
20802	31	200	PES	[PERL]	289	0.39	-	6–7	53	2	45	NW ^E WS ^E	-	-	-	-	-	✓	✓	-	-	✓
20841	15	280	PES	-	110	0.23	-	5–6	-	-	-	-	-	-	-	-	-	-	-	-	✓	
22008	14	235	PES	-	180	0.40	-	5–6	20	25	55	-	30	35	0.54	0.77	-	✓	-	-	✓	
22015	22	200	PES	-	180	0.40	-	5–6	30	30	40	-	35	45	0.52	0.74	-	✓	-	-	✓	

* Values measured on double glazing with thermal insulation coating EN_13363-1 g/Wwindow = 0.7, UVWindow = 1.6

Product overview

Art.no.	Page						Photometric values			Solar values			Global * % %	Fci- Wert *									
			cm					mm		g/m²		mm											
22017	28	235	PES	-	180	0.40	-	5-6	30	30	40	-	45	50	5	0.48	0.68	-					
22018	28	235	PES	-	180	0.40	-	5-6	20	25	55	-	30	35	35	0.54	0.77	-					
22019	26	235	PES	-	180	0.40	-	5-6	40	45	15	-	45	50	5	0.48	0.68	-					
22021	1	200	PES	-	305	0.36	-	6	82	0	18	70	0	30	0.35	0.47							
22022	3	240	PES	-	305	0.36	-	6	82	0	18	70	0	30	0.35	0.47							
22023	9	200	PES	-	305	0.36	-	6	82	0	18	70	0	30	0.35	0.47							
22024	9	200	PES	-	305	0.36	-	6	82	0	18	70	0	30	0.35	0.47							
22026	13	240	PES	-	305	0.36	-	6	82	0	18	70	0	30	0.35	0.47							
22040	31	240	PES	-	225	0.39	-	5	48	15	37	48	19	33	0.45	0.65							
22081	14	220	PES	-	250	0.43	-	7-8	47	24	29	-	50	26	24	0.45	0.64						
22082	14	220	PES	-	250	0.43	-	7-8	47	24	29	-	50	26	24	0.45	0.64						
22083	19	220	PES	-	250	0.43	-	7-8	56	29	15	-	55	29	16	0.42	0.61						
22084	29	220	PES	-	250	0.43	-	7-8	51	26	23	-	53	27	20	0.43	0.62						
22085	27	220	PES	-	250	0.43	-	7-8	51	28	21	-	52	28	20	0.44	0.63						
22086	28	220	PES	-	250	0.43	-	7-8	52	28	20	-	45	27	28	0.47	0.67						
22087	28	220	PES	-	250	0.43	-	7-8	53	27	20	-	53	27	20	0.43	0.62						
22088	24	220	PES	-	250	0.43	-	7-8	59	25	16	-	56	27	17	0.42	0.60						

Art.no.	Page						Photometric values			Solar values			Global * % %	Fci- Wert *								
			cm					mm		g/m²		mm										
22089	24	220	PES	-	250	0.43	-	7-8	57	27	16	-	57	27	16	0.42	0.59					
22090	26	220	PES	-	250	0.43	-	7-8	54	28	18	-	55	28	17	0.42	0.61					
22091	31	220	PES	-	250	0.43	-	7-8	49	25	26	-	52	27	21	0.44	0.63					
22092	32	220	PES	-	250	0.43	-	7-8	58	25	17	-	55	28	17	0.42	0.61					
22110	20	240	PES	-	200	0.43	-	5-6	41	34	25	-	43	35	22	0.48	0.69					
22111	29	240	PES	-	290	0.45	-	6-7	84	0	16	71	0	29	0.33	0.46						
22129	3	200	PES	-	290	0.45	-	6-7	84	0	16	71	0	29	0.33	0.46						
22130	3	200	PES	-	360	0.55	-	6-7	84	0	16	71	0	29	0.33	0.46						
22131	4	200	PES	-	2																	

Product overview

Art.no.	Page	↔ cm			Photometric values		Solar values		Global*	Fc-Wert															
						%		%																	
22141	9	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22144	13	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22144	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22155	LightControl	300	PES	-	420	0.50	B1 M1	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22159	TreviraCS	300		-	200	0.35	B1 M1	6-7	16	13	71		13	12	75	0.45	0.70	✓	✓	✓	-	-	-	✓	✓
22160	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22161	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22162	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22163	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22164	LivingColours	200	PES	-	290	0.45	-	6-7	84	0	16		71	0	29	0.33	0.46	✓	✓	✓	-	-	-	-	-
22174	21	230	PES	-	120	0.28	-	6-7	45	29	26	-	48	32	20	0.46	0.65	✓	✓	✓	-	-	-	✓	-
22178	29	230	PES	-	120	0.28	-	6-7	45	29	26	-	48	32	20	0.46	0.65	✓	✓	✓	-	-	-	✓	-
30104	20	200	PES	-	150	0.30	-	5-6	40	60	0	-	40	45	15	0.50	0.71	-	-	-	-	-	-	✓	-
30106	16	200	PES	-	150	0.30	-	5-6	40	60	0	-	50	45	5	0.45	0.65	-	-	-	-	-	-	✓	-
30115	18	200	PES	-	150	0.65	-	5-6	45	50	5	-	50	45	5	0.45	0.65	-	-	-	-	-	-	✓	-
30128	22	200	PES	-	150	0.30	-	5-6	25	45	30	-	40	45	15	0.50	0.71	-	-	-	-	-	-	✓	-
30445	18	200	PES	-	215	0.51	-	5-6	46	48	6	-	51	45	4	0.45	0.64	✓	✓	✓	-	-	-	✓	-

Art.no.	Page	↔ cm			Photometric values		Solar values		Global*	Fc-Wert															
						%		%																	
30472	3	200	PES		220	0.25	-	6-7	60	0	40		60	0	40	0.39	0.56	✓	✓	✓	-	-	-	-	-
30474	12	200	PES		220	0.25	-	6-7	60	0	40		60	0	40	0.39	0.56	✓	✓	✓	-	-	-	-	-
30517	TreviraCS	230		-	135	0.35	B1 M1	5-7	41	46	13	-	43	48	9	0.49	0.69	✓	✓	✓	-	-	-	✓	✓
30608	AluReflect	238	PES		75	0.20	B1	5-6	56	9	35		58	9	33	0.40	0.57	✓	✓	✓	-	-	-	✓	-
30609	AluReflect	238	PES		75	0.20	B1	5-6	49	7	44		52	8	40	0.42	0.61	✓	✓	✓	-	-	-	✓	-
30610	AluReflect	238	PES		75	0.20	B1	5-6	47	4	49		46	12	42	0.43	0.62	✓	✓	✓	-	-	-	✓	-
30611	AluReflect	240	PES		210	0.45	B1 M1	5	45	12	43		44	10	46	0.45	0.63	-	✓	✓	-	-	-	✓	-
30612	AluReflect	240	PES		210	0.45	B1 M1	5	43	9	48		43	9	48	0.47	0.65	-	✓	✓	-	-	-	✓	-
30613	AluReflect	240	PES		210	0.45	B1 M1	5	41	10	49		44	13	43	0.47	0.65	-	✓	✓	-	-	-	✓	-
30614	AluReflect	240	PES		210	0.45	B1 M1	5	40	6	54		43	9	48	0.47	0.65	-	✓	✓	-	-	-	✓	-
30707	30	230	PES		150	0.35	-	5-6	59	14	27		52	18	30	0.43	0.62	✓	✓	✓	-	-	-	✓	-
30804	33	250	PES	-	87	0.26	-	5-6	5	36	59	-	-	-	-	-	-	-	-	-	-	-	-	-	
30900	TreviraCS	300		-	270	0.49	B1 M1	6-7	61	37	2	-	58	36	6	0.42	0.58	✓	✓	✓	-	-	-	✓	-
30901	TreviraCS	300		-	270	0.49	B1 M1	6-7	57	31	12	-	56	31	13	0.42	0.59	✓	✓	✓	-	-	-	✓	-
30902	TreviraCS	300		-	270	0.49	B1 M1	6-7	44	20	36		51	28	21	0.44	0.61	✓	✓	✓	-	-	-		

Product overview

Art.no.	Page																						
		↔ cm	↔ cm	kg/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fc-Wert	FC-Wert	UV-Index	UV-Index	GreenGuard®	LL	
32003	9	235	PES	—	330	0.40	—	5–6	80	0	20	NW _E w _S	75	0	25	0.32	0.46	—	—	—	—	—	—
32009	16	235	PES	—	150	0.65	—	5–6	45	50	5	—	50	45	5	0.45	0.65	—	—	—	—	—	—
32010	18	200	PES	—	180	0.40	—	5–6	50	50	0	—	45	50	5	0.48	0.68	—	✓	—	—	—	—
32011	16	200	PES	—	150	0.65	—	5–6	45	50	5	—	50	45	5	0.45	0.65	—	—	—	—	—	—
32012	17	200	PES	—	150	0.65	—	5–6	45	50	5	—	50	45	5	0.45	0.65	—	—	—	—	—	—
32067	17	280	PES	—	225	0.66	—	4	—	—	—	—	—	—	—	—	—	✓	—	—	—	✓	—
32068	21	280	PES	—	225	0.66	—	4	55	35	10	—	60	35	5	0.40	0.58	✓	—	—	—	✓	—
32070	30	280	PES	—	225	0.66	—	4	—	—	—	—	—	—	—	—	—	✓	—	—	—	✓	—
32094	5	240	PES	—	280	0.48	—	5–6	68	0	32	NW _E w _S	61	0	39	0.39	0.55	✓	✓	—	—	—	—
32097	6	240	PES	—	280	0.48	—	5–6	38	0	62	NW _E w _S	64	0	36	0.50	0.72	✓	✓	—	—	—	—
32098	11	240	PES	—	280	0.48	—	5–6	6	0	94	NW _E w _S	6	0	94	0.64	0.91	✓	✓	—	—	—	—
32100	12	240	PES	—	280	0.48	—	5–6	45	0	55	NW _E w _S	42	0	58	0.47	0.68	✓	✓	—	—	—	—
32102	13	200	PES	—	220	0.25	—	6–7	61	0	39	NW _E w _S	59	0	41	0.40	0.57	✓	✓	—	—	—	—
32103	17	240	PES	—	120	0.23	—	5–6	49	51	0	—	49	51	0	0.46	0.66	✓	✓	—	—	✓	—
32108	20	240	PES	—	185	0.41	—	5–6	78	22	0	—	69	24	7	0.36	0.51	✓	✓	—	—	—	—
32114	23	240	PES	—	120	0.23	—	5–6	41	44	15	—	43	46	11	0.49	0.69	✓	✓	—	—	✓	—
32121	30	240	PES	—	120	0.23	—	5–6	39	44	17	—	43	48	9	0.49	0.69	✓	✓	—	—	✓	—

Art.no.	Page																					
		↔ cm	↔ cm	kg/m ²	mm	→ ↘ mm	→ ↗ mm	R%	A%	Photometric values	S%	R%	S%	A%	Global*	Gtotal	* Fc-Wert	FC-Wert	UV-Index	UV-Index	GreenGuard®	LL
32122	16	240	55 % CV, 45 % PES	—	110	0.21	—	4–5	—	—	—	—	—	—	—	—	—	—	—	—	—	✓
32123	16	240	55 % CV, 45 % PES	—	110	0.21	—	4–5	—	—	—	—	—	—	—	—	—	—	—	—	—	✓
32126	TreviraCS	230		—	135	0.35	B1 M1	5–7	45	52	3	—	—	—	—	—	—	—	—	—	✓	
32156	LightControl	230	PES	—	420	0.50	B1 M1	6–7	30	0	70	NW _E w _S	26	0	74	0.34	0.46	✓	✓	—	—	✓
32157	LightControl	230	PES	—	420	0.50	B1 M1	6–7	35	0	65	NW _E w _S	30	0	70	0.34	0.46	✓	✓	—	—	✓
32158	LightControl	230	PES	—	420	0.50	B1 M1	6–7	28	0	72	NW _E w _S	24	0	76	0.34	0.46	✓	✓	—	—	✓
32167	21	230	PES	—	150	0.35	—	5–6	69	19	12	NW _E w _S	63	22	15	0.39	0.55	✓	✓	—	—	✓
32168	19	230	PES	—	150	0.30	—	5–6	53	26	21	—	49	24	27	0.45	0.64	✓	✓	—	—	✓
32175	21	230	PES	—	150	0.35	—	5–6	61	16	23	NW _E w _S	56	19	25	0.42	0.60	✓	✓	—	—	✓
32191	TreviraCS	250		—	270	0.49	B1 M1	6–7	5	2	93	NW _E w _S	32	18	50	0.51	0.74	✓	✓	—	—	✓
32192	TreviraCS	250		—	270	0.49	B1 M1	6–7	9	2	89	NW _E w _S	34	18	48	0.52	0.72	✓	✓	—	—	✓
32193	TreviraCS	250		—	270	0.49	B1 M1	6–7	16	5	79	NW _E w _S	39	20	41	0.49	0.69	✓	✓	—	—	✓
32194	TreviraCS	250		—	270	0.49	B1 M1	6–7	7	2	91	NW _E w _S	31	16	53	0.52	0.74	✓	✓	—	—	✓
32195	TreviraCS	250		—	270	0.49	B1 M1	6–7	58	32	10	—	59	33	8	0.41	0.57	✓	✓	—	—	✓
32196	TreviraCS	250		—	270	0.49	B1 M1	6–7	44	24	32	—	52	31	17	0.44	0.62	✓	✓	—	—	✓
32197	TreviraCS	250		—	270	0.49	B1 M1	6–7	25	10	65	NW _E w _S	43	24	33	0.48	0.66	✓	✓	—	—	✓
32198	TreviraCS	300		—	270	0.49	B1 M1	6–7	9	3	88	NW _E w _S	35	19	46							

Product overview

Art.no.	Page	↔ cm			g/m ²		mm	Photometric values			Solar values			Global % * 	Fci- Wert 	L		
										%			%					
32200	21	250	PES	-	87	0.26	-	5–6	15	39	46	-	-	-	-	-	✓	
32301	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	76	18	6		67	22	11	0.37	0.53	-
32302	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	83	11	6		67	15	18	0.37	0.52	-
32303	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	60	5	35		51	7	42	0.44	0.62	-
32304	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	73	10	17		62	13	25	0.39	0.55	-
32305	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	16	1	83		17	3	80	0.59	0.84	-
32306	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	4	0	96		4	0	96	0.65	0.92	-
32401	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	57	23	20	-	68	27	5	0.37	0.52	-
32402	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	75	10	5		65	17	18	0.38	0.54	-
32403	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	54	8	38		43	10	47	0.47	0.68	-
32404	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	67	15	18		55	16	29	0.42	0.60	-
32405	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	14	5	81		12	3	85	0.61	0.87	-
32406	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	4	3	93		4	2	94	0.65	0.92	-
32407	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	37	4	59		31	7	62	0.53	0.75	-
32408	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	46	6	47		40	10	50	0.49	0.69	-
32409	ScreenClassic	250	75 % PVC, 25 % PES	-	520	0.57	B1 M1	7	9	5	86		9	6	85	0.63	0.89	-
32501	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	55	26	19	-	66	29	5	0.37	0.54	-

Art.no.	Page	↔ cm			g/m ²		mm	Photometric values			Solar values			Global % * 	Fci- Wert 	L		
										%			%					
32502	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	77	18	5		66	20	14	0.37	0.53	-
32503	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	49	9	42		44	12	44	0.47	0.67	-
32504	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	66	17	17		56	19	25	0.42	0.60	-
32505	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	15	6	79		6	5	89	0.64	0.91	-
32506	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	4	6	90		5	5	90	0.64	0.92	-
32507	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	32	7	61		32	9	59	0.52	0.75	-
32508	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	40	8	52		11	6	83	0.50	0.71	-
32509	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	10	6	84		37	10	53	0.62	0.88	-
32601	ScreenClassic	250	75 % PVC, 25 % PES	-	420	0.55	B1 M1	7	67	29	4	-	59	32	9	0.41	0.58	-
32602	ScreenClassic	250	75 % PVC, 25 % PES	-	390	0.50	B1 M1	7	73	20	7		63	24	13	0.39	0.55	-
32603	ScreenClassic	250	75 % PVC, 25 % PES	-	390	0.50	B1 M1	7	50	12	38		45	19	36	0.47	0.67	-
32605	ScreenClassic	250	75 % PVC, 25 % PES	-	390	0.50	B1 M1	7	15	9	76		17	11	72	0.59	0.84	-
35118	TreviraCS	230		-	135	0.35	B1 M1	5–7	35	40	25	-	41	45	14	0.49	0.71	✓
35119	TreviraCS	230		-	135	0.35	B1 M1	5–7	31	36	33	-	39	43	18	0.50	0.72	✓
35120	TreviraCS	230		-	135	0.35	B1 M1	5–7	39	47	14	-	43	50	7	0.49	0.70	✓
40063	15	280	PES	-	200	0.50	-	-	67	26	7	-	-	-	-	-	-	✓
40230	12	240	PES	-	320	0.43	-	6	14	0	86		13	0	87	0.61	0.86	✓

* Values measured on double glazing with thermal insulation coating EN_13363-1 g/Wwindow = 0.7, UVWindow = 1.6

Product overview

Art.no.	Page	cm	g/m ²	Photometric values				Solar values				* Fc-Wert	* gtotal	%	%	
				L	R	T	B	S	R	T	B					
40466	1	195	PES	-	330	0.38	-	6-7	80	0	20	N W S E	67	0	33	0.36
40467	10	195	PES	-	330	0.38	-	6-7	80	0	20	N W S E	67	0	33	0.36
40604	AluReflect	238	84 % Trevira CS, 16 % PES	125	0.18	B1	6	64	7	29	N W S E	66	7	27	0.37	
40605	AluReflect	238	84 % Trevira CS, 16 % PES	125	0.18	B1	6	60	6	34	N W S E	62	7	31	0.39	
40606	AluReflect	238	84 % Trevira CS, 16 % PES	125	0.18	B1	6	57	4	39	N W S E	60	6	34	0.39	
40607	AluReflect	238	84 % Trevira CS, 16 % PES	125	0.18	B1	6	57	4	39	N W S E	60	6	34	0.39	
40730	12	230	PES	-	320	0.45	-	5-6	61	0	39	N W S E	57	0	43	0.41
40752	10	205	PES	-	165	0.22	B1	5	68	0	32	N W S E	49	0	51	0.43
40753	10	205	PES	-	165	0.22	B1	5	68	0	32	N W S E	49	0	51	0.43
42025	9	240	PES	-	320	0.43	-	6	18	0	82	N W S E	20	0	80	0.57
42063	2	280	PES	-	300	0.38	-	-	0	-	0	N W S E	-	-	-	-
42066	11	280	PES	-	350	0.54	-	4-5	75	0	25	N W S E	67	0	33	0.36
42072	LevelGreen	300	PES	-	139	0.38	B1 M1	7	48	52	0	-	45	52	3	0.48
42072	ScreenStyle	300	PES	-	139	0.38	B1 M1	7	48	52	0	-	45	52	3	0.48
42073	LevelGreen	300	PES	-	139	0.38	B1 M1	7	44	49	7	-	42	50	8	0.49
42073	ScreenStyle	300	PES	-	139	0.38	B1 M1	7	44	49	7	-	42	50	8	0.49
42074	LevelGreen	300	PES	-	139	0.38	B1 M1	7	33	33	-	35	42	23	0.52	0.74

Art.no.	Page	cm	Photometric values						Solar values						* F_{C-} -Wert	g _{total}	%	* F_{C-} -Wert	g _{total}	%			
			L R	L D	A L	%	R L	D L	A R	%	R L	D L	A R	%									
42074	ScreenStyle	300	PES	-	139	0.38	B1 M1	7	33	34	-	35	42	23	0.52	0.74	-	✓	-	Bronze	Gold	✓	
42075	LevelGreen	300	PES	-	139	0.38	B1 M1	7	12	21	67	-	28	38	34	0.55	0.79	-	✓	-	Bronze	Gold	✓
42075	ScreenStyle	300	PES	-	139	0.38	B1 M1	7	12	21	67	-	28	38	34	0.55	0.79	-	✓	-	Bronze	Gold	✓
42076	LevelGreen	300	PES	-	139	0.38	B1 M1	7	4	12	84	N W E S	21	32	47	0.58	0.83	-	✓	-	Bronze	Gold	✓
42076	ScreenStyle	300	PES	-	139	0.38	B1 M1	7	4	12	84	N W E S	21	32	47	0.58	0.83	-	✓	-	Bronze	Gold	✓
42077	1	220	PES	-	400	0.60	-	7-8	47	0	53	N W E S	55	0	45	0.41	0.59	✓	✓	-	-	-	-
42078	8	220	PES	-	400	0.60	-	7-8	58	0	42	N W E S	57	0	43	0.41	0.58	✓	✓	-	-	-	-
42079	10	220	PES	-	400	0.60	-	7-8	39	0	61	N W E S	45	0	55	0.46	0.66	✓	✓	-	-	-	-
42080	10	220	PES	-	400	0.60	-	7-8	8	0	92	N W E S	10	0	90	0.62	0.88	✓	✓	-	-	-	-
42104	18	238	PES	-	145	0.36	-	5-6	61	39	0	-	61	39	0	0.40	0.57	✓	✓	-	-	-	-
42105	16	240	PES	-	210	0.43	-	5-6	56	44	0	-	55	43	2	0.43	0.61	✓	✓	-	-	-	-
42106	16	240	PES	-	165	0.40	-	6-7	54	46	0	-	55	45	0	0.43	0.62	✓	✓	-	-	-	-
42107	16	240	PES	-	175	0.38	-	5-6	52	47	1	-	53	46	1	0.44	0.63	✓	✓	-	-	-	-
42109	20	240	PES	-	160	0.36	-	5-6	52	41	7	-	52	41	7	0.44	0.63	✓	✓	-	-	-	-
42112	22	240	PES	-	175	0.38	-	5-6	42	35	23	-	44	36	20	0.48	0.68	✓	✓	-	-	-	-
42113	28	240	PES	-	175	0.38	-	5-6	53	47	0	-	53	46	1	0.44	0.63	✓	✓	-	-	-	-
42116	25	240	PES	-	165	0.40	-	6-7	55	45	0	-	55	44	1	0.43	0.61	✓	✓	-	-	-	-
42118	26	240	PES	-	175	0.38	-	5-6	47	36	17	-	48	37	15	0.46	0.66	✓	✓	-	-	-	-

* Values measured on double glazing with thermal insulation coating EN_13363-1 q_{Window} = 0.7; U_{Window} = 1.6

Product overview

Art.no.	Page	↔ cm	↓ g/m ²	→ mm	Photometric values			Solar values			Global *% S _R S _A	Global *% S _A	Fc-Wert	L										
					R	T	A	S _R	S _A	%														
42119	31	240	PES	-	160	0.36	-	5-6	47	36	17	-	47	37	16	0.46	0.66	✓	✓	✓	-	✓	-	
42120	30	240	PES	-	160	0.26	-	5-6	54	46	0	-	54	46	0	0.44	0.62	✓	✓	✓	-	✓	-	
42128	3	230	PES	-	320	0.45	-	5-6	64	0	36	NW _S E	60	0	40	0.39	0.56	✓	✓	✓	-	-	-	
42133	4	230	PES	-	270	0.45	-	6-7	61	0	39	NW _S E	58	0	42	0.41	0.59	✓	✓	✓	-	-	-	
42142	11	230	PES	-	270	0.45	-	6-7	9	0	91	NW _S E	7	0	93	0.63	0.90	✓	✓	✓	-	-	-	
42165	17	230	PES	-	150	0.30	-	5-6	57	28	15	-	54	29	17	0.43	0.61	✓	✓	✓	-	-	-	
42182	33	280	PES	-	160	0.32	-	6-7	19	7	74	NW _S E	16	9	75	0.60	0.85	✓	✓	✓	-	-	-	
42188	240	AluReflect	[Alu]	170	0.36	B1 M1	5-6	49	11	40	NW _S E	50	11	39	0.44	0.61	-	✓	✓	-	-	-	-	
50130	3	200	PES	-	300	0.50	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-
50136	4	195	PES	-	280	0.35	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-
50148	6	200	PES	-	300	0.50	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-
50149	11	200	PES	-	300	0.50	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-
50150	7	200	PES	-	300	0.50	-	5-6	40	55	5	-	40	55	5	0.50	0.72	-	✓	✓	-	-	-	-
50161	LevelGreen	200	PES Recyclet	-	130	0.30	-	5-6	20	25	55	-	30	45	25	0.54	0.78	-	✓	✓	-	-	-	-
50163	LevelGreen	200	PES Recyclet	-	130	0.30	-	5-6	20	25	55	-	30	45	25	0.54	0.78	-	✓	✓	-	-	-	-
50164	LevelGreen	200	PES Recyclet	-	130	0.30	-	5-6	20	25	55	-	30	45	25	0.54	0.78	-	✓	✓	-	-	-	-
52006	LevelGreen	200	PES Recyclet	-	130	0.30	-	5-6	20	25	55	-	30	45	25	0.54	0.78	-	✓	✓	-	-	-	-

Art.no.	Page	↔ cm	↓ g/m ²	→ mm	Photometric values			Solar values			Global *% S _R S _A	Global *% S _A	Fc-Wert	L											
					R	T	A	S _R	S _A	%															
52007	LevelGreen	200	PES Recyclet	-	130	0.30	-	5-6	10	30	60	-	30	40	30	0.54	0.77	-	✓	✓	-	-	-		
52124	30	250	PES	-	170	0.35	-	4-5	-	-	-	-	-	-	-	-	-	✓	✓	✓	-	✓	-		
52189	AluReflect	240	[Alu]	170	0.36	B1 M1	5-6	49	9	42	NW _S E	51	9	40	0.43	0.61	-	✓	✓	-	-	-	-		
52190	AluReflect	240	[Alu]	170	0.36	B1 M1	5-6	47	7	46	NW _S E	49	9	42	0.44	0.61	-	✓	✓	-	-	-	-		
60091	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	63	35	2	-	59	36	5	0.41	0.58	✓	✓	✓	-	-	-		
60092	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	34	8	58	NW _S E	48	20	32	0.44	0.64	✓	✓	✓	-	-	-		
60093	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	17	5	78	NW _S E	39	17	44	0.48	0.69	✓	✓	✓	-	-	-		
60094	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	8	5	87	NW _S E	35	19	46	0.50	0.72	✓	✓	✓	-	-	-		
60095	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	28	8	64	NW _S E	46	21	33	0.45	0.65	✓	✓	✓	-	-	-		
60096	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	21	7	72	NW _S E	41	20	39	0.48	0.68	✓	✓	✓	-	-	-		
60097	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	11	5	84	NW _S E	38	19	43	0.49	0.70	✓	✓	✓	-	-	-		
60098	ScreenStyle	300	[Screen]	-	290	0.48	B1 M1	6-7	4	5	91	NW _S E	31	17	52	0.52	0.74	✓	✓	✓	-	-	-		
60165	LevelGreen	200	PES Recyclet	-	300	0.35	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-	
60166	LevelGreen	200	PES Recyclet	-	300	0.35	-	5-6	80	0	20	NW _S E	75	0	25	0.32	0.46	-	✓	✓	-	-	-	-	
60167	LevelGreen	200	PES Recyclet	-	320	0.45	B1 M1	7	71	4	25	NW _S E	75	4	25	0.34	0.49	✓	✓	✓	-	-	-	-	
60201**	ScreenClassic	235	65 % PVC, 35 % PES	[Alu]	-	320	0.45	B1 M1	7	71	4	25	NW _S E	71	4	25	0.32	0.46	-	✓	✓	-	-	-	-
60202**	ScreenClassic	235	65 % PVC, 35 % PES	[Alu]	-	320	0.45	B1 M1	7	73	4	23	NW _S E	72	3	25	0.34	0.48	✓	✓	✓	-	-	-	-
60462	6	240	PES	-	330	0.51	-	6-7	80	0	20	NW _S E	67	0	33	0.36	0.51	✓	✓	✓	-	-	-	-	

Product overview

Art. no.	Page	↔ cm	g/m ²	mm	Photometric values				Solar values	* Fc-Wert	L	
					R	L	T	A↓	S	A↑	g _{total}	%
60575**	ScreenClassic	235	65 % PVC, 35 % PES	0.45	B1 M1	7	72	4	24	0.34	0.48	✓
60576**	ScreenClassic	235	65 % PVC, 35 % PES	0.45	B1 M1	7	70	5	25	0.34	0.48	✓
60577**	ScreenClassic	235	65 % PVC, 35 % PES	0.45	B1 M1	7	70	4	26	0.35	0.50	✓
60578**	ScreenClassic	235	65 % PVC, 35 % PES	0.45	B1 M1	7	72	4	24	0.34	0.48	✓
60629	22	240	PES	-	150	0.36	-	5-6	37	51	12	0.51
60644	5	280	PES	-	450	0.50	-	-	81	0	19	0.49
62065	6	280	PES	-	450	0.50	-	-	80	0	20	0.49
62071	2	200	PES	-	320	0.43	-	6	82	0	18	0.49
62093	3	240	PES	-	350	0.52	-	6	83	0	17	0.49
62095	5	240	PES	-	330	0.51	-	6-7	80	0	20	0.49
62096	6	230	PES	-	300	0.36	-	6-7	80	0	20	0.49
62099	12	240	PES	-	350	0.52	-	6	84	0	16	0.48
62101	12	240	PES	-	330	0.54	-	5-6	50	0	50	0.47
62125	3	280	PES	-	390	0.55	-	4-5	85	0	15	0.48
62127	2	280	PES	-	300	0.45	-	6-7	76	0	24	0.49
62138	5	280	PES	-	300	0.45	-	6-7	23	0	77	0.58

Art. no.	Page	↔ cm	g/m ²	mm	Photometric values				Solar values	* Fc-Wert	L	
					R	L	T	A↓	S	A↑	g _{total}	%
62139	6	280	PES	-	300	0.45	-	6-7	44	0	56	0.49
62143	13	280	PES	-	300	0.45	-	6-7	16	0	84	0.60

* Values measured on double glazing with thermal insulation coating EN_13363-1 gWindow = 0.7, UWwindow = 1.6 ** Price group 6 +25 %





KADECO Sonnenschutzsysteme GmbH · www.kadeco.de

© KADECO - MINRO-GB-1018 · Full or partial reproduction subject to prior written approval.
Subject to technical enhancements and modifications without prior notice; errors and omissions excepted.